

Lab & Medical Equipment



BIOBASE GROUP

Add: No.9 Gangxing Road, High-tech Zone,
Jinan City, Shandong Province, China

Tel: +86-531-81219803

E-mail: export@biobase.com

Website: www.biobase.cc / www.biobase.com



BIOBASE CHINA

Version 2025-1

About Us


BIOBASE Group, as a professional manufacturer of laboratory and medical equipment, supplies one-stop solution.

During long-term friendly bilateral cooperation with customers, BIOBASE is always being trusted. The customers purchase BIOBASE products, in the meantime, more and more customers were willing to buy a variety of items from BIOBASE.

In order to meet customer needs and ensure the interests of customers, BIOBASE made field visits to many suppliers in China, to ensure product quality and get competitive price. Now, BIOBASE has developed many OEM partners and will keep searching for more suppliers upon customers' requests.

BIOBASE provides one-stop solution, which can not only reduce the resourcing cost, but also can ensure good quality and sufficient aftersales service.

In addition, any abroad strong manufacturer is welcomed to contact us, we can work together to open China market.

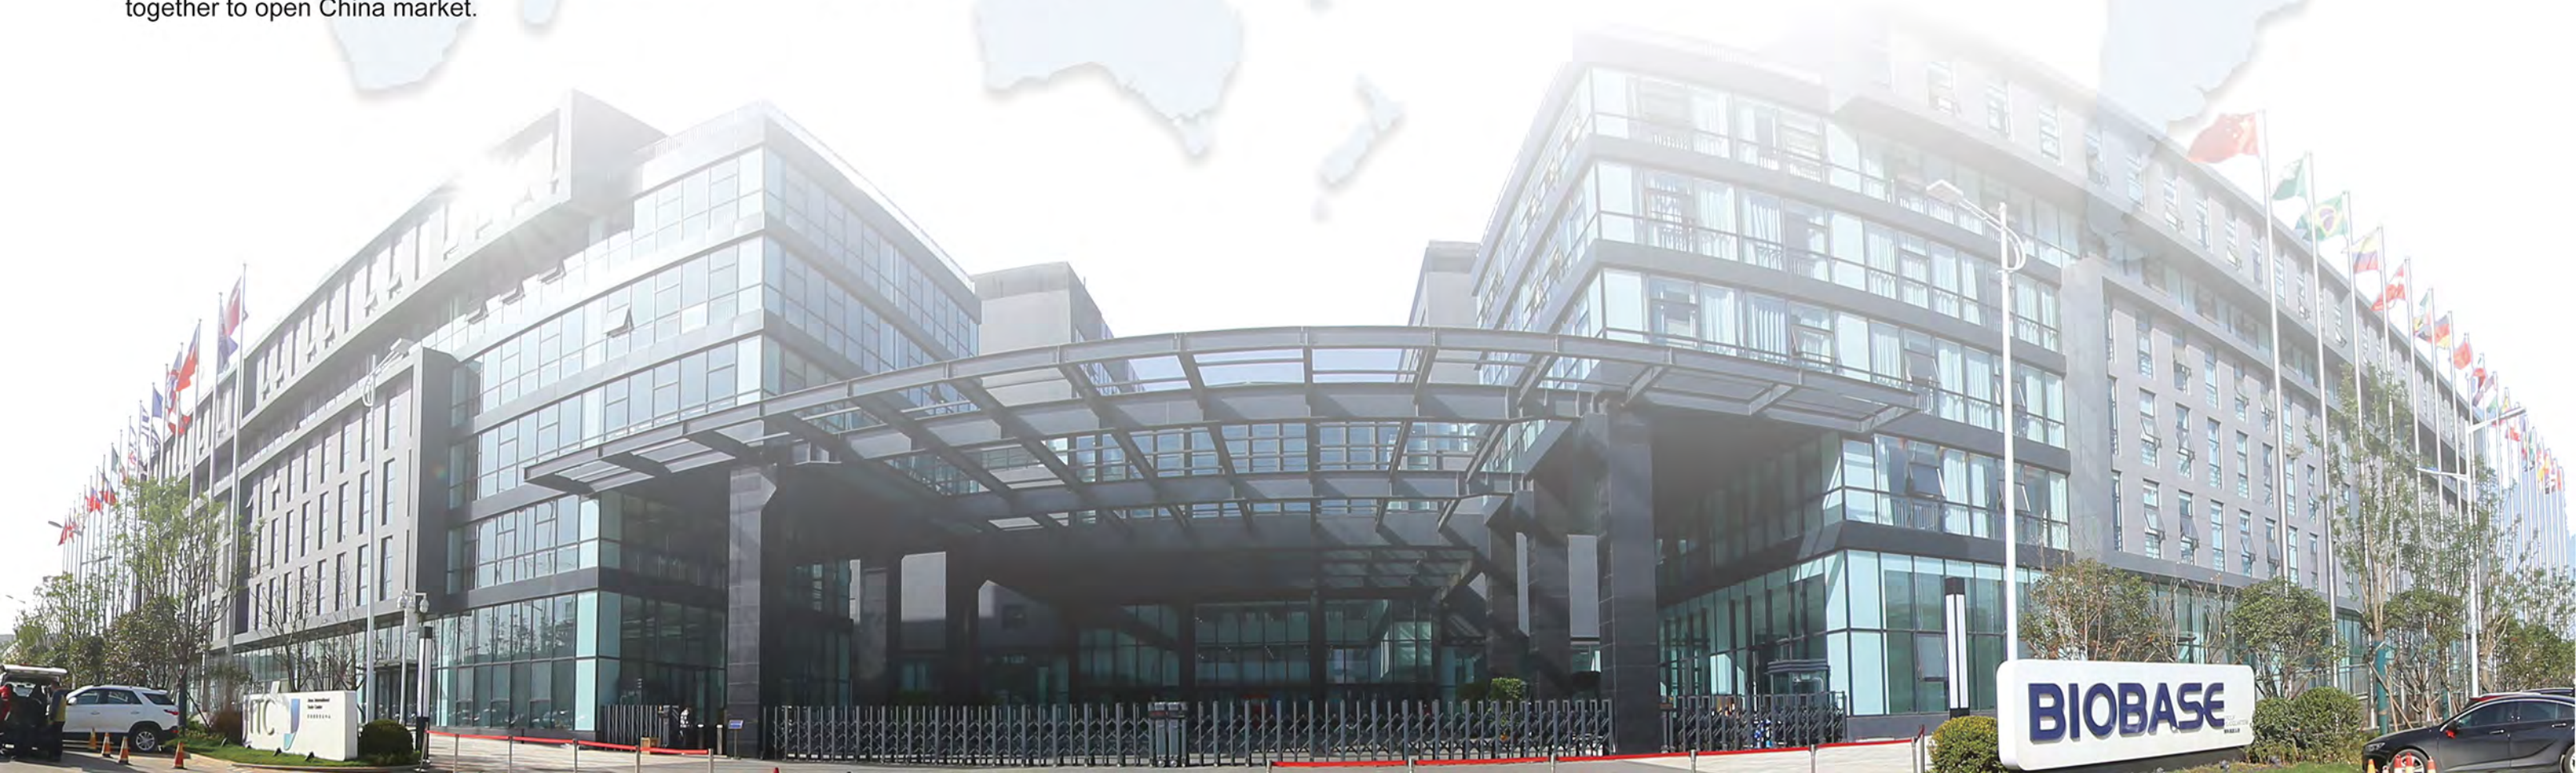

CONTENTS

A

Anaerobic Jar-----	454
Automobile Exhaust Analyzer-----	540
Air Volume Meter-----	126

B

Balance-----	01-16
Bath/Circulator-----	339-360
Blood Bank Instrument-----	407-424
Blood Collection Chair-----	407
Blood Collection Monitor-----	408-410
Blood Bag Tube Sealer-----	411-414
Blood Plasma Extractor-----	414
Blood Thaw Machine-----	415-416
Hemocytometer-----	417
Platelet Agitator-----	418
Blood and Fluid Warmer-----	419-420
Pulse Oximeter-----	421
Vein Finder-----	422
Intelligent Centrifuge Balancer-----	423
Low Temperature Blood Operating Cabinet-----	424
Low Temperature Blood Operating Bench-----	425

Bacterial Colony Counter-----	455
Biological Air Sampler-----	456-457
BOD Tester-----	463-464

C

Carbon & Sulfur Analyzer-----	459-460
COD Analyzer-----	461
Colorimeter-----	469-474
Chromatograph-----	509-525
Cooking Oil Tester-----	598

D

Dispenser-----	325-334
Dehumidifier-----	95-98
Densimeter-----	483-488

E

Electrochemistry Meter-----	207-268
Electrophoresis System-----	489-500
Eye Washer-----	501-503

F

Fiber Analyzer-----	504
Fat Analyzer-----	505-508
Flash Point Tester-----	553-554

G

Gas Generator-----	529-536
Grain Moisture Meter-----	595-596

H

Hot plate-----	197-201
Heating Mantle-----	202-206

J

Jar Tester-----	539
-----------------	-----

K

Kjeldahl Apparatus-----	109-118
-------------------------	---------

L

Leakage Tester-----	555-556
Laboratory Wastewater Treatment System-----	629-632

M

Microscope-----	17-52
Mixer-----	150-168
Mouse Cage-----	477-482
Medical Drying Cabinet-----	384
Microbial Limit Tester-----	458
Medical Diagnostic and Therapeutic Equipment-----	640-651
Pulmonary Function Tester-----	640
Intermediate Frequency Therapy Instrument-----	641-642
AED-----	643-644
Nebulizer-----	645-646
Healthcare Station-----	647-648
Surgical Shadowless Lamp-----	649-650
X-ray Film Viewing Lamp-----	651

CONTENTS

N

Neonatal Care Products-----	633-639
Infant Incubator-----	633-634
Infant Radiation Warmer-----	635
Infant Intelligent Physical Examination Instrument-----	636
Jaundice Meter&Neonatal Jaundice Therapy Apparatus-----	637-638
Doppler Fetal Monitor-----	639

P

Pipettes-----	309-324
Pipette Stand-----	335-336
Pump-----	361-376
Vacuum Pump-----	361-362
Peristaltic Pump-----	363-376
Pathology Lab Equipment-----	385-406
Automated Tissue Processor-----	387-390
Microtome-----	391-395
Tissue Embedding Center-----	396-397
Tissue Cooling Center-----	396
Tissue Flotation Water Bath & Slide Dryer-----	398-400
Tissue Flotation Water Bath-----	401
Slide Dryer (Hot Plate)-----	402
Automated Tissue Stainer-----	403-404
Paraffin Dispenser-----	405
Slides Cabinet-----	406
Pharmacy Instrument-----	433-453
Disintegration Tester-----	433-439
Dissolution Tester-----	434-440
Tablet Friability Tester-----	435-441
Tablet Hardness Tester-----	436-442
Clarify Tester-----	437-445
Transparency Tester-----	438
Benchtop Thickness Tester-----	438
Thaw Tester-----	443
Tablet Four-usage Tester-----	444
Gel Strength Test System-----	446
Automatic Laser Particle Size Analyzer-----	477-448
Laboratory Test Sieve-----	449
Melting Point Apparatus-----	450-453
Polarimeter-----	547-552

R

Rotary Evaporator-----	297-308
Rotary Evaporator-----	297-303
Water Circulating Vacuum Pump-----	304
Chiller-----	305-308
Reactor-----	537-538
Refractometer-----	541-546
Rapid Moisture Meter-----	597

S

Sample Pre-Processing-----	53-108
Plate Sealer-----	53
Incubator-----	54-70
Ultrasonic Cell Disruptor-----	73-74
Sample Concentrator-----	71-72
Disintegrator-----	75-76
Ball Mill-----	77-79
Grinding Machine-----	80-82
Homogenizer-----	83-89
Muffle Furnace-----	90-93
Filtration Apparatus-----	99-100
Digester-----	101-108
Shaker-----	127-149
Stirrer-----	169-196
Spectrophotometer-----	269-296
Safety Storage Cabinet-----	377-383
Sealer-----	426-432
Soil&Plant&Seed Instruments Solution-----	557-590

T

Turbidimeter-----	462
Total Organic Carbon Analyzer-----	465-468
Thermal Analysis Instruments-----	526-528
Titration-----	591-593

U

Ultrasonic Cleaner-----	119-125
Ultrasonic Humidifier-----	94

V

Vacuum Aspiration Systems-----	337-338
Viscometer-----	599-602

W

Whiteness Meter-----	475-476
Water Activity Meter-----	594
Water Softener-----	603
Water Purifier-----	604-626
Water Distiller-----	627-628

Balance

Semi-micro Analytical Balance

The precision of the semi-microbalance is 0.01 mg. This series is equipped with a new type of highly integrated electromagnetic sensor, all of its models can be automatically internally calibrated, with the characteristics of high precision and high repeatability. All HPBG-type balances are equipped with a large graphic display screen, which is convenient for users to operate.

Function:

- * Recipe database: 99 datas can be stored
- * Automatic internal calibration
- * Tare/counting/percentage test/animal weighing
- * Baud rate is adjustable/ Density function
- * Unit conversion (g/mg/ct/oz...)
- * Multi-Language: English/ German/French/Italian/ Spanish/Portuguese
- * Keep weight values in GLP/ISO format, Includes date, time, and serial number
- * Plastic protection cover for keypad
- * Sensitivity/speed adjustable
- * Overload alarm/fault alarm/level indicator

Optional Accessories:

- * ION-A15 Static Eliminator
- * Balance plate system. USB version (BL0329) or Bluetooth version (BL0330)
- * Alphanumeric external keyboard (AC005)
- * Serial to USB converter (E1002)
- * Serial cable for serial output to printer or computer (E743)
- * Factory calibration certificate (BL0333)

Technical Parameters:

Model	BA1265SEM	BA2285SEM
Capacity	62/120g	82/220g
Resolution	0.01mg/0.1mg	
Min Weighing	60mg	
Stable Time	≤6s	
Display	LCD(white back light with black font)	
Scale Size	Φ80mm	
Operation Temp	18-23℃	
Repeat Ability	0.03 / 0.1mg	0.05 / 0.1mg
Liner	±0.08 / ±0.2mg	± 0.1/ ± 0.2mg
Draft Shield Inner Size	152*160*225mm	
Cal. Weight	Internal Calibration	
Interface	RS232C	
Power Supply	AC110~230V 50/60Hz Out DC 12V 1A	
External Size	345*215*345mm	
N. Weight	5.8 kg	
Package Size	520*410*650mm	
G. Weight	10kg	



Static Eliminator (Optional)



Introduction:

Semi-micro analytical balance adopts high sensitivity and high stability electromagnetic force sensor, stability and accuracy compatible performance to meet the needs of precision weighing laboratory.

Application:

Widely used in scientific research, education, metallurgy, agriculture and other industries.

Features:

- * Transparent glass wind shield, multiple directions can see the sample.
- * LCD display screen.
- * Split-type design, display unit and weighing unit are separated.
- * Digital processing technology, optimized small sample adding weighing function.
- * Built-in RS232 communication interface, can be connected with computers, micro printers.
- * Automatic calibration system.
- * Multiple weighing application functions, basic weighing function, piece weighing function, percentage weighing function.

Technical Parameters:

Model	BA1205SEM	BA1055SEM	BA2085SEM
Capacity	120g	120g/51g	210g/82g
Resolution	0.01mg	0.1mg/0.01mg	
Repeat Ability	±0.02mg	±0.1mg/±0.02mg	±0.1mg/±0.02mg
Liner	±0.02mg	±0.1mg/±0.02mg	±0.1mg/±0.02mg
Operation Temp	18~23℃		
Operating Humidity	20%~80%RH		
Stable Time	6s(average)	2.5s/6s(average)	
Balance Time	30~60min		
Scale Size	Φ90mm		
Power Supply	Standard: AC220V 50/60Hz Optional: AC110V 50/60Hz		
Output Power	DC12V 2A		
External Size(L*W*H)	470*310*320mm		
Package Size(L*W*H)	625*465*570mm		
Net/Gross Weight	12/14kg		

Automatic Electronic Analytical Balance BG-B & BG-C



Features:

- * The classic electromagnetic force balance sensor ensures high weighing accuracy, excellent stability, and fast response speed.
- * High-precision and high-resolution electromagnetic force balance sensors are adopted.
- * A high-precision humidity sensor is used to effectively reduce the impact of environmental humidity on weighing.
- * A highly sensitive temperature sensor is used to effectively reduce the sensitivity to temperature changes.
- * With an outstanding design offering high cost - effectiveness, it can excellently complete various weighing/measurement tasks.
- * LCD liquid crystal display: An LCD liquid crystal display is adopted, with a clear and bright screen and a reasonable layout, making it convenient for users to read the weighing results.
- * Transparent glass windbreak: It makes the sample visible from multiple directions during the weighing process. It can also be disassembled and cleaned for quick cleaning.
- * Multiple weighing modes: basic weighing, percentage weighing, and counting weighing.
- * Sensor protection device: It ensures that the sensor will not be damaged during the transportation of the balance.
- * Optimized product structure design: The design strength is improved, and it has the characteristics of anti - leakage, anti - static, and anti - corrosion.
- * Built - in RS232 two - way communication interface: It can realize the connection between the balance and a computer or a micro - printer. Weighing results can also be transmitted to other open applications such as a PC.
- * Fully automatic calibration system: When the temperature changes by 1.5℃ or the time since the last calibration exceeds 2 hours, the balance will automatically start the calibration function. This avoids potential factors such as failure to perform regular calibration or inaccurate external weights, making the weighing results of users more accurate and reliable, and reducing unnecessary operations (promoting internal calibration).

Technical Parameters:

Model	BG1204B	BG1204C	BG2204B	BG2204C
Readability	0.1mg			
Maximum Range (max)	120g		220g	
Repeat Ability	±0.2mg			
Liner	±0.2mg			
Stable Time	≤2.5s			
Pre-heating Time After Startup	30~60min			
Precision Grade	I			
Pan Diameter	φ90mm			
Height of Weighing Chamber	210mm			
Operational Temperature Range	10~30℃			
Relative Humidity	20%~80%			
Calibration Mode	External	Internal	External	Internal
Optional Accessories	USB port, printer, under-hanging weighing device, density module for both solid and liquid			
Power Supply	AC100~240v, 50/60Hz			
External Size (W*D*H)	210*310*315mm			
Baud Rate Options	300, 600, 1200, 2400, 4800, 9600			
Package Size (W*D*H)	400*500*470mm			
Gross Weight	7kg			

Automatic Electronic Analytical Balance BA-E (External Calibration) & BA-EN (Internal Calibration)



Functions:

- * External calibration (BA1004E&BA2204E)
- * Internal auto calibration (BA1204EN&BA2204EN)
- * Electromagnetic force sensor
- * LCD (White back light with black font)
- * Tare function/Counting/Unit conversion
- * Sensitivity/Speed set/Percentage
- * Accumulation function/peak hold
- * Dynamic weighing /Net and Gross/Clock function(optional)
- * Print function (baud rate setting, Continuous communication or press communication)
- * Overload alarm/Fault alarm/Level indicator
- * Optional: printer

Technical Parameter:

Model	BA1004E	BA2204E	BA1204EN	BA2204EN
Capacity	100g	220g	120g	220g
Resolution	0.1mg			
Min weighing	10mg			
Stable Time	≤3s			
Display	LCD(white back light with black font), 96*24mm			
Scale Size	Φ80mm(Standard), Φ90mm(Optional)			
Operation temp	18~23℃			
Repeat ability	±0.2mg			
Liner	±0.3mg			
Draft Shield Inner Size	175*165*200mm			
Cal. weight	External Calibration		Internal Calibration	
Interface	RS232C			
Optional	Printer			
Power Supply	110~240V 50/60Hz			
External Size	305*210*305mm			
Net Weight	5kg			
Package Size	430*320*420mm			
Gross Weight	6.5kg			

Automatic Electronic Analytical Balance BA-C (Internal Calibration)

Features:

- * Humanized design, novel design and five-side full-transparent windshield.
- * A new-generation electromagnetic balance weight sensor guarantees the high precision.
- * Application programs such as automatic fault detection, four-point linear calibration and over-load protection.
- * The adoption of ultra-large digital integrated printed circuit board guarantees high product precision.
- * The adoption of twin-cam mechanism realizes advantageous function of automatic internal calibration which makes product faster and more stable.
- * Application programs such as “Warming”, “Calibration”, and “Screen Saver”.
- * Ultra-large LCD display brings clearer and more comfortable visual sense to operator.



Functions:

- * Multiple functions guarantee easy and reliable operation, including auto-counting, unit conversion (metric carat, gold ounce, etc.), stability, full-scale faring, zero-memory, etc.
- * Built-in automatic calibration guarantees easier, faster, stable and accurate operation of balance.
- * Built-in RS232C output interface guarantees direct connection to external equipment such as computer and printer.
- * Built-in lower weighing hook guarantees convenient use.

Power Supply: AC110-220V/50-60Hz; Power Cord, no battery.

Technical Parameters:

Model	BA604C	BA1004C	BA1204C	BA1604C	BA2004C	BA2204C	BA1003C	BA2003C	BA3003C
Capacity	0~60g	0~100g	0~120g	0~160g	0~200g	0~220g	0~100g	0~200g	0~300g
Readability	0.1mg						1mg		
Scale Size	Φ90mm								
Stable Time	4s	6s			6-8s		1s		
Repeat Ability	0.2mg				0.3mg		1mg		
Liner	0.2mg	0.3mg					1mg		
N.W.	6.8kg								
External Size	350*215*340mm								
Package Size	485*375*515mm								
G.W.	9kg								
Work Space Height	240mm								
Calibration	Internal Cal								

Standard Accessory:

Balance body, scale, adaptor, dust guard, cleaning cloth, tweezers and brush.

BA-N Automatic Electronic Analytical Balance (Internal Calibration) (Economic Series)

Features:

- * Auto Timed Internal Calibration/One-key Calibration
- * Wide-view LCD High-definition Display
- * Electromagnetic Force Balance Sensor
- * Cast Aluminum Housing/Large-space Windshield
- * Full-range Tare Function
- * Counting/Percentage Weighing Modes
- * Unit Conversion (g/mg/ct/oz, etc.)
- * Underhook Weighing
- * Adjustable Sensitivity/Speed
- * Overload Alarm/Fault Alarm/Level Indicator
- * Optional: Printer



Technical Parameters:

Model	BA1004N	BA1104N	BA1204N	BA2004N	BA2104N	BA2204N
Capacity	0~100g	0~110g	0~120g	0~200g	0~210g	0~220g
Readability	0.1mg					
Scale Size	Φ80mm					
Stable Time	≤3s					
Repeat ability	±0.0002g					
Liner	±0.0003g					
Work Space Height	230mm					
Calibration	Internal Cal					
Draft Shield Inner Size	175*165*230mm					
Interface	RS232C					
Optional	Printer					
Operation Temp	18~23℃					
Power Supply	110~240V, 50/60Hz					
External Size	365*210*355mm					
Package Size	490*360*530mm					
N.W.	8kg					
G.W.	10kg					

Standard Accessory

Balance body, adapter, weight, windshield.

BA-B Series Electronic Analytical Balance
(External Calibration)

Features:

- * Humanized design, novel design and five-side full-transparent windshield.
- * A new-generation electromagnetic balance weighing sensor guarantees high precision.
- * Application programs such as automatic fault detection, four-point linear calibration and over-load protection.
- * Ultra-large LCD display brings clearer and more comfortable visual sense to operate.



Functions:

- * Multiple functions guarantee easy and reliable operation, including auto-counting, unit conversion (metric carat, gold ounce, etc.), stability, full-scale faring, zero-memory, etc.
- * Built-in RS232C output interface guarantees direct connection to external equipment such as computer and printer.
- * Built-in lower weighing hook guarantees convenient use.

Power Supply: AC110-220V/50-60Hz; Power Cord, no battery.

Technical Parameters:

Model	BA504B	BA604B	BA1004B	BA1104B	BA1204B	BA1604B	BA2004B	BA2104B	BA2204B	BA2104S
Capacity	0~50g	0~60g	0~100g	0~110g	0~120g	0~160g	0~200g	0~210g	0~220g	0~60/60~210g
Readability	0.1mg									0.1mg/1mg
Scale Size	Φ90mm									
Stable Time	4s		6s				6-8s			4s
Repeat Ability	0.2mg						0.3mg			0.2mg/1mg
Liner	0.2mg		0.3mg							0.2mg/1mg
N.W.	6.8kg									
External Size	350*215*340mm									
Package Size	480*375*515mm									
G.W.	9kg									
Work Space Height	240mm									
Calibration	External Cal									

Standard Accessory:

Balance body, scale, adaptor, Standard weights, dust guard, cleaning cloth, tweezers and brush.

BH-B Series Electronic Precision Balance



Features:

- * The gold-plated ceramic sensor ensures excellent accuracy, stability, and fast response speed for weighing tasks.
- * A gold-plated ceramic variable capacitance sensor is adopted.
- * A high-precision humidity sensor is applied, effectively reducing the impact of environmental humidity on weighing.
- * A highly sensitive temperature sensor is applied, effectively reducing the sensitivity to temperature changes. With an outstanding design offering high cost-effectiveness, it can excellently complete various weighing tasks.
- * An LCD liquid crystal display is adopted. The screen is clear and bright with a reasonable layout, making it convenient for users to read the weighing results.
- * The transparent glass windproof cover makes the sample visible from multiple directions during the weighing process. It can also be disassembled and cleaned for quick cleaning.
- * It has the function of multiple weighing unit conversion, allowing free switching among units such as grams (g), carats (Ct), ounces (Oz), etc.
- * Multiple weighing modes: basic weighing, counting weighing, percentage weighing, and check weighing mode.
- * The whole machine adopts a streamlined design, with improved strength. It has the characteristics of anti-leakage, anti-static, and anti-corrosion, and is suitable for use in various occasions.
- * It has a built-in RS232 two-way communication interface, which can realize the connection between the balance and a computer or a micro printer. The weighing results can also be transmitted to other open applications such as a PC.

Technical Parameters:

Model	BH1203B	BH2203B	BH3203B	BH4203B	BH5203B	BH6203B
Readability	1mg					
Maximum Range (max)	120g	220g	320g	420g	520g	620g
Repeat Ability	±2mg					
Liner	±0.2mg					
Stable Time	≤2.5s					
Sensitivity Drift	5ppm/k					
Pan Diameter	Φ115mm					
Height of Weighing Chamber	210mm					
Operational Temperature Range	13~25℃					
Relative Humidity	10%~70%					
Calibration Mode	External					
Optional Accessories	USB port, printer, under-hanging weighing device, density module for both solid and liquid					
Power Supply	AC100~240v, 50/60Hz					
External Size (W*D*H)	210*310*315mm					
Package Size (W*D*H)	350*450*420mm					
Gross Weight	5.5kg					

BP-B/P Series Electronic Precision Balance

Features:

- * Humanized design, novel design and five-side full-transparent windshield.
- * A new-generation electromagnetic balance weighing sensor guarantee high precision.
- * Application programs such as automatic fault detection, four-point linear calibration and over-load protection.
- * Ultra-large LCD display brings clearer and more comfortable visual sense to operate.
- * Built-in lower weighing hook guarantees convenient use.



Functions:

- * Multiple functions guarantee easy and reliable operation, including auto-counting, unit conversion (metric carat, gold ounce, etc.), stability, full-scale faring, zero-memory, etc.
- * Built-in RS232C output interface guarantees direct connection to external equipment such as computer and printer.
- * Built-in lower weighing hook guarantees convenient use.

Power Supply: AC110-220V/50-60Hz; Power Cord, no battery.

Technical Parameters:

Model	BP1003B	BP1203B	BP2003B	BP3003B	BP4103B	BP5003B	BP10003	BP1003P	BP2003P
Capacity	0~100g	0~120g	0~200g	0~300g	0~410g	0~500g	0~1000g	0~100g	0~200g
Readability	1mg								
Scale Size	Φ90mm				Φ110mm			Φ80mm	
Stable Time	1s								
Repeat Ability	1mg						2mg		
Liner	1mg				2mg		3mg		
N.W.	6.8kg								
External Size	350*215*340mm								
Package Size	480*375*515mm								
G.W.	9kg								
Work Space Height	240mm								
Calibration	External Cal								

Standard Accessory:

Balance body, scale, adaptor, Standard weights, dust guard, cleaning cloth, tweezers and brush.

BP Series Electronic Precision Balance



Functions:

- * Multiple functions including auto-counting, unit conversion (metric carat, gold ounce, etc.), stability, full-scale faring, zero-memory, etc.
- * Built-in RS232C output interface for computer and printer.

Power Supply: AC220V±10%, 50/60Hz; 110V±10%, 50/60Hz, Power Cord, no battery.

Technical Parameters:

Model	Capacity	Readability	Repeatability	Linear Error	Scale Size	Package Size	Gross Weight		
BP12002	0~1200g	10mg	10mg	20mg	Φ160mm	480*375*515	8.5kg		
BP21002	0~2100g								
BP31002	0~3100g		20mg	30mg					
BP50002	0~5000g								
BP21001	0~2100g	100mg	100mg	100mg					
BP31001	0~3100g								
BP41001	0~4100g								
BP51001	0~5100g								
BP61001	0~6100g			200mg					

Standard Accessory:

Balance body, scale, clean cloth.

BE Series Electronic Balance



Scale Size: Φ125mm



Scale Size: 130*130mm



Scale Size: 165*175mm



Scale Size: 305*225mm

Features:

- * AC/DC exchangeable, balance level, LCD display, rapid weighing response and high stability.
 - * Sensor adopts unique locking device, which guarantees protection of balance during transportation.
- Functions:**
- * System operations: including auto-counting, percentage, multi-point calibration, standard weights(optional).
 - * Multiple functions guarantee easy and reliable operation, including unit conversion (metric carat, gold ounce, etc.), stability, memory, full-scale faring.
 - * Built-in RS232C output interface guarantees direct connection to external equipment such as computer and printer.

Power Supply: AC110/220V±10%, 50/60Hz; Capacity < 10kg: Power cord, lithium battery position(9V*1pc)

no battery; Capacity ≥10kg: Power cord, accumulator.

Technical Parameters:

Model	Capacity	Readability	Repeatability	Linear Error	Scale Size	G.W.	Package Size
BE1002	0~100g	0.01g	0.01g	0.02g	Φ125mm	2.3kg	365*265*170mm
BE2002	0~200g				130*130mm		
BE3002	0~300g						
BE4002	0~400g						
BE5002	0~500g						
BE6002	0~600g						
BE10002	0~1000g		0.02g	0.03g	165*175mm		
BE20002	0~2000g						
BE30002	0~3000g						
BE50002	0~5000g		0.03g	0.03g	165*175mm		
BE2001	0~200g	0.1g	0.1g	0.1g	Φ125mm	2.3kg	365*265*170mm
BE4001	0~400g				130*130mm		
BE5001	0~500g						
BE6001	0~600g						
BE8001	0~800g						
BE10001	0~1000g						
BE16001	0~1600g						
BE20001	0~2000g						
BE30001	0~3000g						
BE40001	0~4000g						
BE50001	0~5000g						
BE60001	0~6000g						
BE80001	0~8000g						
BE100001	0~10000g		0.2g	0.2g	305*225mm	4.6kg	460*395*250mm
BE150001	0~15000g						
BE200001	0~20000g						
BE300001	0~30000g						
BE300001	0~30000g	0.3g	0.3g				
BE1000	0~1000g	1g	1g	1g	130*130mm	2.3kg	365*265*170mm
BE2000	0~2000g				165*175mm		
BE3000	0~3000g						
BE6000	0~6000g						
BE10000	0~10000g					305*225mm	4.6kg
BE15000	0~15000g						
BE20000	0~20000g						
BE30000	0~30000g						

BE-G/N Classic Electronic Balance (Economic Series)



Features:

- * AC/DC exchangeable, LCD display, rapid weighing response and high stability.
- * Precision scales calibrated sensor window can effectively make the calibration more accurate(only for BE-G/GF series).
- * External Material:
BE-G/GF series, stainless steel scale, plastic case and aluminum base thick of 3.8mm,
BE-N/NF series, stainless steel scale, plastic case and ABS base
- * Superior wireless sensors realize no-button operation of peeled, calibration, avoiding button corrosion by the sample residues.

Optional Functions:

Anti-theft device&Sealing device (Only for BE-G/GF series)

Weighing function under the hanging structure, or test weight for weighing magnetic object density, specific gravity, etc.

Power Supply

AC220V±10%, 50/60HZ; 110V±10%, 50/60HZ

Power cord, dry battery reservation position (AA*6pcs), no battery, no accumulator.

Standard Weight:

Model \ Readability	1mg	10mg	100mg	1g
200g> Capacity≥100g	100g weight	100g weight	No weight	No weight
500g> Capacity≥200g	200g weight	200g weight	No weight	No weight
Capacity≥500g	500g weight	500g weight	No weight	No weight

Technical Parameters:

Model	Capacity	Readability	Repeatability	Linear Error	Scale Size	G.W.	Package Size	Interface
BE1002G	100g	10mg	±10mg	±10mg	Φ130mm	3kg	365*295*135 mm	RS232 (Standard) RS485 (Optional)
BE2002G	200g							
BE3002G	300g							
BE6002G	600g							
BE10002G	1000g				Φ160mm			
BE20002G	2000g							
BE30002G	3000g							
BE40002G	4000g							
BE50002G	5000g	100mg	±100mg	±100mg	200*200mm			
BE60001GF	6000g							
BE100001GF	10000g							
BE150001GF	15000g							
BE6000GF	6000g					1g	±1g	±1g
BE10000GF	10000g							
BE15000GF	15000g							
BE1002N	100g	10mg	±10mg	±10mg	Φ130mm	2kg	320*280*150 mm	RS232 (Optional)
BE2002N	200g							
BE3002N	300g							
BE5002N	500g							
BE6002N	600g							
BE10002N	1000g							
BE3001N	300g	100mg	±100mg	±100mg	Φ160mm			
BE6001N	600g							
BE10001N	1000g							
BE20001NF	2000g							
BE30001NF	3000g							
BE50001NF	5000g							

Large-scale Electronic Balance



Introduction:
Large-scale electronic balance has fluent and novel appearance as well as new design, which bring faster weighing response. Unique metal base and mechanical structure guarantee higher stability and stronger anti-interference performance. AC/DC exchangeable for portability and field operation. Besides, we can also customize special specifications upon customer's request.

- Feature:**
- * The unique appearance design makes the product have high stability, and the backlit LCD screen makes the operator's vision more comfortable.
 - * With AC and DC power supply, valve regulated lead-acid battery.
 - * With a variety of measurement unit conversion, count, percentage, multi-point calibration.
 - * The built-in RS232C output interface can be used with computers, printers and other equipment.

Technical Parameters:

Model	Capacity	Readability	Power Supply	Scale Size (mm)	External Size (W*D*H) mm	Net Weight	Package Size (W*D*H) mm	Gross Weight	
BE40000L	0-40000g	1g	100~240V, 50/60Hz	500*400	630*400*880	11kg	870*465*225	15kg	
BE50000L	0-50000g								
BE60000L	0-60000g								
BE100000L	0-100000g								
BE150000L	0-150000g								
BE200000L	0-200000g								
BE300000L	0-300000g								
BE50000L-10	0-50000g								10g
BE60000L-10	0-60000g								
BE100000L-10	0-100000g								
BE150000L-10	0-150000g								
BE200000L-10	0-200000g								
BE300000L-10	0-300000g								
BE500000L-10	0-500000g								50g
BE100000L-50	0-100000g								
BE150000L-50	0-150000g								
BE200000L-50	0-200000g								

BM-50 Series Rapid Moisture Meter

- Features:**
- * LCD Display
 - * RS232 communication interface
 - * Convenient and quick operating with 6 buttons.
 - * Heating element, Halogen lamps, proper for samples requires quick heating.
 - * Adopting heating-insulated weighing sensor avoids accuracy affected by heating.



Technical Parameters:

Model	BM-50-10	BM-50-5	BM-50-1
Capacity	50g		
Weight Readability	0.01g	0.005g	0.001g
Repeatability Standard Deviation	0.01g	0.05g	0.002g
Linear Error	0.01g	0.05g	0.002g
Moisture Percentage Accuracy	0.3%	0.2%	0.1%
Scale Size	Φ90mm		
Temperature Capacity	50~180℃	50~180℃	50~180℃
Ambient Temperature	10~30℃	10~30℃	10~30℃
Power Supply	AC110/220V±10%, 50/60Hz; Power cord, no battery		
Package Size	465*335*368mm		
Gross Weight	4.1kg		

Electronic Density (Specific Gravity) Balance



Technical Parameters:

Model	BA-100D	BA-200D
Max Capacity	100g	200g
Repeatability	10mg	
Linear Error	20mg	
Min Capacity	10mg	
Fixed Support	H=203mm	
Scale Size	Φ110mm	
Output	RS-232C	
Power Supply	AC110/220V±10%, 50/60Hz; Power cord, no battery	
Gross Weight	3.5kg	
Package Size	377*281*278mm	
Accessories	Measuring platform, measuring cup, fixed support, thermometer, doublehook weights, platinum wire, plumb bob, wire basket, balance body, adaptor and standard weights	

Microscope
Microcirculation Microscope

Application:
 Microcirculation microscope is used the early diagnosis, guide treatment and observation for varies diseases including cardiovascular, diabetes, hypertension, stroke, rheumatoid arthritis, etc.It is widely used in medicine, health care products, human health consulting, beauty care and other fields. It is also used for individual microcirculation monitoring



WXH-8



WXH-10/12

Technical Parameters:

Model	WXH-8	WXH-10	WXH-12
Magnification	380X	480X	580X
Display Size(mm)	161*121	204*153	185*240
Objective	10X		
Focus System	Coaxial coarse/ slightly adjusted, Z-axis movement, mechanical upper and lower limits		
Stage	360°revolve, X, Y axis movement, moving range 30*80mm		
Illumination	LED illumination with high brightness and lower consumption, new luminaire with lower temperature and 10, 000-200, 000h working life, 90°revolve left and right		
Power Supply	AC100-230V, 50/60Hz		
Camera	Color camera system, HD LCD display		
Standard Accessory	Aluminum box, display screen, power cable, asphalt, manual, Flip chart, microcirculation flattery		
Package Size	270*340*380mm	300*380*380mm	
Gross Weight	5.5kg	7kg	

Biological Microscope



BM-A106



BM-A118



BM-A206



BM-T300



BM-T310

Technical Parameters:

Model		BM-A106	BM-A118	BM-A206
Objective	4X, 10X, 40X (spring)	√	√	√
Eyepiece	Wide field eyepieces WF10X、 (WF25XorWF20X,WF16X or H16X optional)	√	√	√
Viewing Head	Monocular	√	√	√
Nosepiece	Triple	√	√	√
Stage	Plain stage with paired clips	√	√	√
	Plain stage with moving scale	●	/	●
Focusing	Coarse adjustment focusing	√	√	√
	Coaxial coarse and fine adjustment focusing	/	/	/
Illumination &Condenser	Rotating disc diaphragm	√	/	√
	N.A=0.65 abbe condenser & rotating disc diaphragm	/	√	/
	Flat concave reflector	/	/	/
	Electric light source top LED (incandescent optional)	/	/	/
	Electric light source bottom LED (incandescent optional)	/	/	/
	Electric light source top and bottom LED (incandescent optional)	√	√	√
Power	Power: battery	√	√	√
	AC Input 100-230V, DC Output 5V	/	√	√
Package Size(mm)		160*220*300	160*220*300	160*220*300
Gross Weight(kg)		1.8	2.5	2

Model		BM-T300	BM-T310
Objectives	Achromatic objectives: 4X, 10X, 40X(S), 100X(S, Oil)	√	√
	Plan objectives: 4X, 10X, 40X(S), 100X(S, Oil)	●	●
	Infinite achromatic objectives: 4X, 10X, 40X(S), 100X(S, Oil)	●	●
	Infinite plan objectives: 4X, 10X, 40X(S), 100X(S, Oil)	●	●
Eyepiece	Wide field eyepiece: WF10X(18mm), (WF16X optional)	√	√
Viewing Head	Compensation free binocular head, inclined at 30°	√	/
	Compensation free trinocular head, inclined at 30°	/	√
Nosepiece	Quadruple	√	√
Stage	Double layer mechanical stage size 140X205mm, moving range 77X50 mm	√	√
Focusing	Coaxial coarse and fine adjustment, focusing range 30mm,focusing interval 0.002mm	√	√
Condenser	Abbe NA=1.25 with iris diaphragm & filter	√	√
Illumination	High LED light source	√	√
Power	AC input 100-230V, DC output 12V	√	√
Package Size(mm)		485*335*255	485*335*255
Gross Weight(kg)		7.5	8

Note: √ Standard Outfit, ● Optional

Biological Microscope



Technical Parameters:

Model		BM-B100	BM-B101	BM-B102	BM-B103	BM-B104	BM-B105	BM-B106	BM-B108
Eyepiece	Wide Field Eyepieces WF10X (WF16X or H16X optional)	√	√	√	√	√	√	√	√
Viewing	Monocular	√	√	\	\	\	\	\	\
Head	Monocular with video teaching head	\	\	√	√	\	\	\	\
	Compensation free binocular head	\	\	\	\	√	√	\	\
	Compensation free trinocular head	\	\	\	\	\	\	√	√
Objective	4X (spring)	√	√	●	√	√	√	√	√
	10X(spring)	√	√	√	√	√	√	√	√
	40X (spring)	√	√	√	√	√	√	√	√
	100X(spring, oil)	●	√	√	√	√	√	√	√
Nosepiece	Triple Nosepiece	√	●	√	●	●	●	●	●
	Quadruple Nosepiece	●	√	●	√	√	√	√	√
Stage	Double layer mechanical stage, size:110x115mm	\	√	\	√	\	√	\	√
	Plain Stage with paired clips	√	\	●	\	●	\	●	\
	Plain Stage with moving scale	●	\	√	\	√	\	√	\
Focusing	Coaxial Coarse and Fine Adjustment, Focusing Range 20mm	√	√	√	√	√	√	√	√
Condenser	N.A.=1.25 Abbe condenser &Iris diaphragm (optional)	●	√	●	√	√	√	√	√
	N.A.=0.65 Abbe condenser &Iris diaphragm	√	\	√	\	●	\	●	\
Illumination	Electric light source LED	√	√	√	√	√	√	√	√
Diaphragm	Rotating disc diaphragm	●	\	\	\	\	\	\	\
Power Supply	AC Input 100~230V, DC Output 12V	√	√	√	√	√	√	√	√
Package Size (mm)		210*280*400	210*280*400	210*280*400	210*280*400	270*310*410	270*310*410	270*310*410	270*310*410
Gross Weight		3kg	3.5kg	3.5kg	4kg	4kg	4.5kg	4.5kg	4.8kg

Note: √ Standard Outfit, ● Optional, \ Without this feature

Biological Microscope



Technical Parameters:

Model		BM-F101	BM-F102	BM-F103	BM-F104	BM-F105	BM-F106	BM-F108
Eyepiece	Wide Field Eyepieces WF10X(WF25X or WF20X or WF16X Optional)	√	√	√	√	√	√	√
Viewing Head	Compensation Free Binocular Head					√		
	Dual Viewing Head, one Tube 30° Inclined and Another Tube Vertical, 360° Rotatable		√	√				
	Compensation Free Trinocular Head						√	√
	Monocular	√						
Achromatic Objective	4X,10X,40X(Spring),100X (Spring, Oil)(185)	√	√	√	√	√	√	√
	4X,10X,40X (Spring), 100X (Spring, Oil)(195)	●	●	●	√	●	●	●
Nosepiece	Triple Nosepiece	●	●	●	●	●	●	●
	Quadruple Nosepiece	√	√	√	●	√	√	√
Stage	Double Layer Mechanical Stage, Size:110√135mm	√		√		√		√
	Plain Stage with Moving Scale	√	√		√		√	
Focusing	Coaxial Coarse and Fine Adjustment, Focusing Range 20mm	√	√	√	√	√	√	√
Condenser	Simple N. A=1.25 Abbe Condenser &Iris Diaphragm		√		√		√	
	Handwheel Adjustment N.A=1.25 Abbe Condenser & Iris Diaphragm	√		√	√	√		√
Illumination	No Strobe High Brightness LED Light	√	√	√	√	√	√	√
Power Supply	AC Input 100~230V, DC Output 12V	√	√	√	√	√	√	√
Package Size(W*D*H) mm		270*310*410						
Gross Weight(kg)		4	4	4.2	4.5	5	5	5.2

Note: √ Standard Outfit, ● Optional

Biological Microscope



Technical Parameters:

Model		BM-Z102	BM-Z104	BM-Z106	BM-Z110	BM-Z112
Viewing Head	Wide field eyepiece: WF10X, (WF16X optional)	√	√	√	√	√
	Compensation free binocular head inclined at 30°	/	√	/	/	/
	Sliding binocular head inclined at 45°	/	/	√	/	/
	Sliding trinocular head, Inclined at 45°	/	/	/	/	√
	Monocular with video teaching head	√	/	/	/	/
Achromatic Objective	4X, 10X, 40X(spring), 100X(spring, oil)	√	√	√	√	√
Nosepiece	Quadruple nosepiece	√	√	√	√	√
Stage	Double layer mechanical stage size 132*140mm, moving range 75*45mm	√	√	√	√	√
Base Accessories	Black decorative panel	•	•	•	•	√
Focusing	Coaxial coarse and fine adjustment, focusing range 30mm, focusing interval 0.002mm	√	√	√	√	√
Condenser	Abbe NA=1.25 with iris diaphragm & filter	√	√	√	√	√
Illumination	LED light source (Halogen lamp optional)	√	√	√	√	√
Power Supply	AC Input 100-230V, DC Output 12V	√	√	√	√	√
Package Size(W*D*H) mm		320*280*420mm				
Gross Weight(kg)		5.2	5.6	5.6	6	6

Note: √ Standard Outfit, • Optional

Economical Biological Microscope



Technical Parameters:

Model	BME-500D	BME-500E	BME-500SM	BME-500V
Viewing Head	Monocular head inclined at 30°, 360° rotatable	Compensation free binocular head inclined at 30°, 360° rotatable	Compensation free trinocular head, 360° rotatable	Dual viewing head, one tube 30°, inclined and another tube vertical, 360° rotatable
Achromatic Objectives	4X, 10X, 40X(Spring), 100X(Spring, Oil)			
Eyepiece	Wide field eyepiece: WF10X, (WF16X optional)			
Stage	Double layer mechanical stage size 115*125mm			
Focusing	Coaxial coarse and fine adjustment, focusing range 30mm, focusing interval 0.002mm			
Condenser	Abbe NA=1.25 with iris diaphragm&filter			
Illumination	LED(1W) lamp 220V or 110V, (LED 3W lamp optional)			
Power Supply	AC110/220V±10%, 50/60Hz			
Package Size	450*360*240mm			
Gross Weight	5kg			

Note: Trinocular microscope can be installed camera. 110V/220V for LED lamp.

Biological Microscope



BM-2CA



BM-2CBA

Technical Parameters:

Model	BM-2CA	BM-2CBA
View Head	Compensation free binocular head, Inclined at 30°, 360° rotatable, Interpupillary 55~75mm	Compensation free trinocular head, Inclined at 30°, 360° rotatable, Interpupillary 55~75mm
Eyepiece	P10X/18mm, P16X/11mm	
Achromatic Objective	4X N.A=0.10 WD=37.50mm	
	10X N.A=0.25 WD=7.31mm	
	40X N.A=0.65 WD=0.63mm	
	100X(Oil) N.A=1.25 WD=0.18mm	
Focusing	Coaxial Coarse & Fine Adjustable System, Range 15mm, Fine Division 0.002mm	
Stage	Mechanical Stage 130*130mm, Moving Range 70*30mm, Vernier 0.1mm	Mechanical Stage 130*125mm, Moving Range 70*30mm, Vernier 0.1mm
Condenser	Abbe NA1.25 condenser with Iris Diaphragm & Filter	
Illumination	LED lamp, brightness adjustable	
Filter	Yellow, green	
Power Supply	AC85~240V, 50/60Hz	
Package Size	435*330*235mm	335*215*470mm
Gross Weight	5.5kg	



BM-8C




BM-8CA

Technical Parameters:

Model	BM-8C	BM-8CA
View Head	Compensation free binocular head, Inclined at 30°, 360° rotatable, Interpupillary 55~75mm	Compensation free trinocular head, Inclined at 30°, 360° rotatable, Interpupillary 55~75mm
Eyepiece	P10X/18mm, P16X/11mm	
Achromatic Objective	4X N.A=0.10 WD=37.50mm	
	10X N.A=0.25 WD=7.31mm	
	40X N.A=0.65 WD=0.63mm	
	100X(Oil) N.A=1.25 WD=0.18mm	
Focusing	Coaxial Coarse & Fine Adjustable System, Range 30mm, Fine Division 0.002mm	
Stage	Double Layers Mechanical Stage 155*145mm, Moving Range 80*50mm	Mechanical Stage 140*140mm, Moving Range 75*50mm, Vernier 0.1mm
Condenser	Abbe NA1.25 condenser with Iris Diaphragm & Filter	
Illumination	Halogen lamp 6V/20W, Kohler illumination, brightness adjustable	
Filter	Blue, yellow, green	
Power Supply	AC85~240V, 50/60Hz	
Package Size	355*265*495mm	
Gross Weight	6kg	7.5kg


Biological Microscope

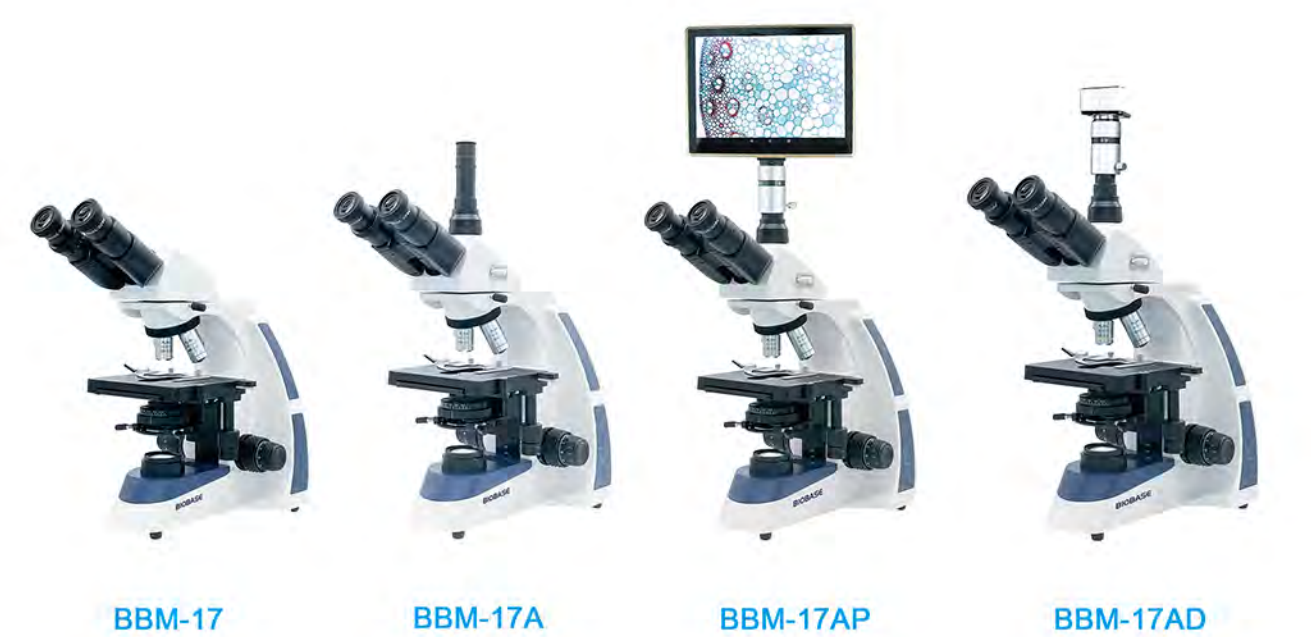

Technical Parameters:

Model	BBM-17	BBM-17A	BBM-17AP	BBM-17AD
Optical System	Infinite optical system			
View Head	Compensation free binocular head, Inclined at 30°, 360° rotatable, Interpupillary 45~75mm	Compensation free trinocular head, Inclined at 30°, 360° rotatable, Interpupillary 45~75mm	Compensation free trinocular head, Inclined at 30°, 360° rotatable, Interpupillary 48~75mm	
Eyepiece	WF10X/22mm, P16X/15mm(Optional)		WF10X/22mm, P16X/15mm(Optional)	
Infinite Achromatic Objective	4X N.A=0.10 WD=20.00mm			
	10X N.A=0.25 WD=13.50mm			
	40X N.A=0.65 WD=0.68mm			
	100X(Oil) N.A=1.25 WD=0.20mm			
Focusing	Coaxial Coarse & Fine Adjustable System, Range 30mm, Fine Division 0.002mm			
Stage	Mechanical Stage 140*160mm, Moving Range 76*45mm			
Condenser	Abbe NA1.25 centerable condenser with Iris Diaphragm & Filter			
Illumination	LED lamp, brightness adjustable			
Filter	Yellow, green			
Imaging System	/		10.5-inch Android system PAD, MCL-Z adapter	500W CMOS Camera, MCL-Z adapter
Power Supply	AC85~240V, 50/60Hz			
Package Size	410*260*525mm		410*260*610mm	
Net Weight	9kg		10kg	
Gross Weight	11kg		12kg	

Trinocular UIS Biological Microscope

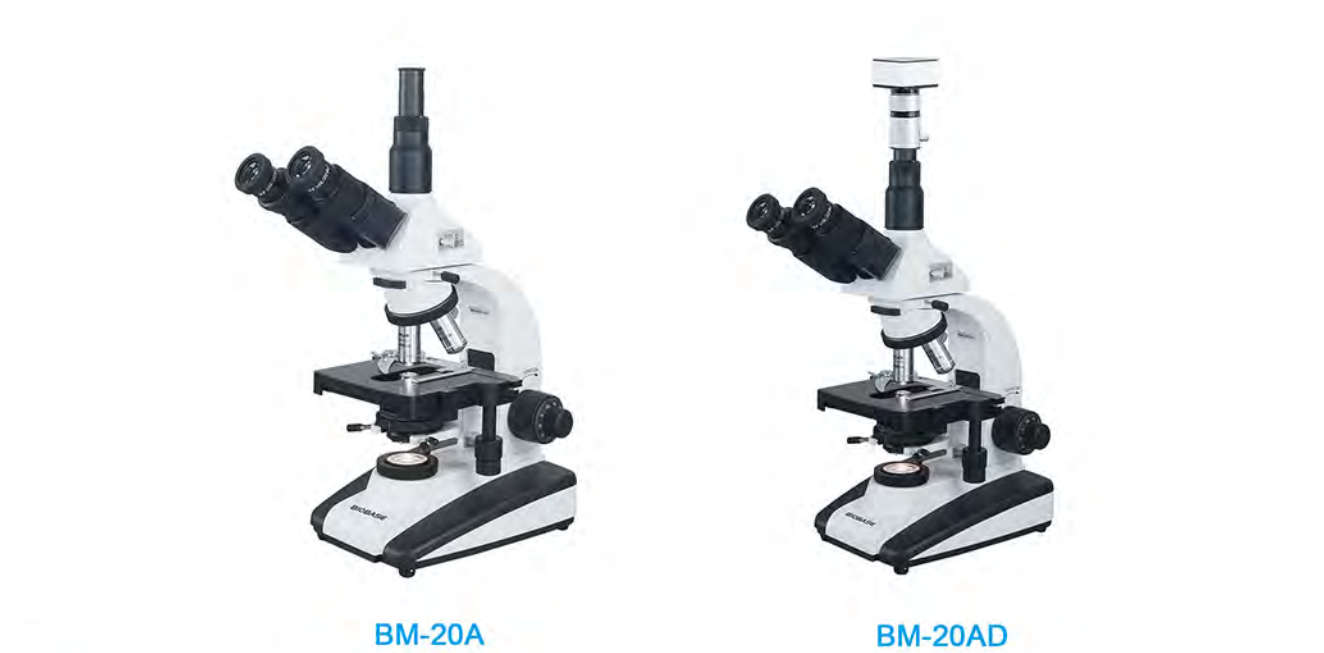

Technical Parameters:

Model	BM-20A	BM-20AD
Optical System	Infinite optical system	
View Head	Compensation Free Trinocular Head, Inclined at 30°, 360° rotatable, interpupillary 55~75mm	
Eyepiece	P10X/22mm, P16X/15mm	
Infinite Plan Achromatic Objective	4X N.A=0.10 WD=20.00mm	
	10X N.A=0.25 WD=13.50mm	
	40X N.A=0.65 WD=0.68mm	
	100X(Oil) N.A=1.25 WD=0.20mm	
	20X N.A=0.40 WD=2.00mm(Optional for BM-20AD)	
Focusing	Coaxial Coarse & Fine Adjustable System, Range 30mm, Fine Division 0.002mm	
Stage	Double Layers Mechanical Stage 155*145mm, Moving Range 80*50mm	
Condenser	Abbe NA1.25 centerable condenser with Iris Diaphragm & Filter	
Illumination	Halogen lamp 6V/20W, Kohler illumination, brightness adjustable	
Filter	Blue, yellow, green	
Imaging System	/	500W CMOS Camera, MCL-Z adapter
Power Supply	AC85~240V, 50/60Hz	
Package Size (L*W*H)	430*330*430mm	440*340*455mm
Net Weight	9kg	11kg
Gross Weight	10kg	12kg

XS-208 Series Laboratory Biological Microscope



Technical Parameters:

	Specification	Model					
		XS-208A	XS-208B	XS-208C	XS-208AP	XS-208BP	XS-208AB
Observation Head	45° tilt sliding binocular observation head	√					
	45° tilt sliding trinocular observation head		√				
	Hinged 30° binocular observation head				√		√
	Hinged 30° trinocular observation head			√		√	
Nosepiece	Multi-roller four-aperture objective lens converter	√	√	√	√	√	√
Eyepiece	Wide-angle plane eyepiece: WF10X/18mm	√	√	√	√	√	√
Objective Lens	Achromatic 4X, 10X, 40X (spring), 100X (spring, oil)	√	√				√
	Plan achromat 4X, 10X, 40X (spring), 100X (spring, oil)				√	√	
	Infinity plan achromat 4X, 10X, 40X (spring), 100X (spring, oil)			√			
Stage	Double-layer mechanical platform 135*140mm	√	√	√	√	√	√
Condenser	ABBE NA1.25 condenser with variable aperture and filters, rack and pinion adjustment	√	√	√	√	√	√
Illumination	Built-in lighting	√	√	√	√	√	√
Power Supply	AC100~240V, 50/60Hz	√	√	√	√	√	√
Optional Accessories	Darkfield condenser, phase contrast accessories	√	√	√	√	√	√
Package	Foam carton	√	√	√	√	√	√
Packing Size	250*360*460mm	√	√	√	√	√	√
Gross Weight	8kg	√	√	√	√	√	√

XSB-Series Laboratory Biological Microscope



Technical Parameters:

	Specification	Model			
		XSB-301P	XSB-301B	XSB-102B	XSB-301A
Observation Head	Hinge-type 30° tilt binocular observation head				
	Hinge-type 30° tilt trinocular observation head	√	√		
	45° tilt sliding binocular observation head			√	
	45° tilt sliding trinocular viewing head				√
Nosepiece	Multi-roller four-aperture objective lens converter	√	√	√	√
Eyepiece	Wide-angle eyepiece: WF10X18 mm	√	√	√	√
Objective Lens	Plan achromat 4X, 10X, 40X (spring), 100X (spring, oil)	√			
	Achromatic 4X, 10X, 40X (spring), 100X (spring, oil)		√	√	√
Stage	Double-layer mechanical platform 135*140 mm	√	√	√	√
Condenser	Abbe NA1.25 condenser with aperture				
	Variable aperture and filter , rack and pinion adjustment	√	√	√	√
Illumination	Built-in lighting	√	√	√	√
Power Supply	AC100~240V, 50/60Hz	√	√	√	√
Optional Accessories	Darkfield condenser, phase contrast kit	√	√	√	√
Package	Cardboard box with foam	√	√	√	√
Packing Size	270*320*430mm	√	√	√	√
Gross Weight	7kg	√	√	√	√

BX-Series Laboratory Biological Microscope



BX-101A



BX-101B



BX-102A



BX-102B



BX-102C



BX-103C

Technical Parameters:

	Specification	Model		
		BX-101A	BX-101B	BX-102A
Observation Head	Monocular observation head tilted 45°	√		
	Monocular observation head		√	
	45° tilt sliding binocular observation head			√
	30° tilted uncompensated binocular observation head			
	45° tilted free sliding trinocular observation head			
Nosepiece	Multi-roller four-aperture objective lens converter	√	√	√
Eyepiece	Wide-angle plane eyepiece: WF10X18mm	√	√	√
Objective Lens	185 achromatic 4X, 10X, 40X (spring), 100X (spring, oil)	√	√	√
Stage	Double-layer mechanical platform 115*125mm, moving range 30*50mm	√	√	√
Condenser	Abbe NA1.25 condenser with aperture Variable aperture and filter	√	√	√
Illumination	Built-in lighting	√	√	√
Power Supply	AC100~240V, 50/60Hz	√	√	√
Package	Foam carton	√	√	√
Packing Size	250*360*460mm	√	√	√
Gross Weight	6kg	√	√	√

Technical Parameters:

	Specification	Model		
		BX-102B	BX-102C	BX-103C
Observation Head	Monocular observation head tilted 45°			
	Binocular observation head 45°			
	45° tilt sliding binocular observation head	√		
	30° tilted hinged binocular observation head		√	
	45° tilted free sliding trinocular observation head			√
Nosepiece	Multi-roller four-aperture objective lens converter	√	√	√
Eyepiece	Wide-angle plane eyepiece: WF10X18mm	√	√	√
Objective Lens	Achromatic 4X, 10X, 40X (spring), 100X (spring, oil)	√	√	√
Stage	Double-layer mechanical platform 115*125mm, moving range 30*50mm	√	√	√
Condenser	Abbe NA1.25 condenser with aperture Variable aperture and filter	√	√	√
Illumination	Built-in lighting	√	√	√
Power Supply	AC100~240V, 50/60Hz	√	√	√
Package	Foam carton	√	√	√
Packing Size	250*360*460mm	√	√	√
Gross Weight	6kg	√	√	√

Multi-function Biological Microscope



BMM-1000

BMM-2000

Technical Parameters:

Model		BMM-1000	BMM-2000
Optical System	Infinite optical system	/	√
Viewing Head	Siedentopf binocular viewing head, inclined at 30°, 360° rotatable, Interpupillary 48~75mm	√	√
	Siedentopf trinocular viewing head, inclined at 30°, 360° rotatable, Interpupillary 48~75mm	•	•
Eyepiece	WF10×/18	√	\
	P16×/11	•	\
	WF10×/20	\	√
	WF15×/16	\	•
Objective	Achromatic objective 4X,10X, 40X,100X	√	\
	Semi-plan achromatic objective 4X,10X, 40X,100X	•	\
	Infinite achromatic objective 4X,10X, 40X,100X	•	\
	Infinite semi-plan achromatic objective 4X, 10X, 40X, 100X	•	\
	Infinite plan achromatic objective 4X,10X, 40X,100X	\	√
Nosepiece	Quadruple nosepiece	√	\
	Backward quadruple nosepiece	\	√
	Backward quintuple nosepiece	\	•
Focusing	Coaxial coarse & fine adjustment, fine division 0.002mm, coarse stroke 37.7mm per rotation, fine stroke 0.2mm per rotation ,moving range 20mm	√	√
Stage	Double layers mechanical stage:132*142mm, moving range:75*40mm	√	\
	Rectangular 230*150mm stage, moving range:78*54mm, using low-positioned X/Y coaxial control knob	\	√
Condenser	Abbe condenser NA1.25 with aperture diaphragm	√	√
Illumination	S-LED Illumination, brightness adjustable	√	√
	12V/20W Halogen lamp, brightness adjustable	•	•
	Kohler illumination	\	•
Power Supply	110~220V, 50/60Hz	√	√
Accessories	Photo attachment, video attachment	•	•
	Dark field condenser	\	\
	Polarization set, phase contrast kit	\	•
Package Size	323*264*440mm(BMM-1000), 380*260*510mm(BMM-2000)	√	√
Gross Weight	6.5kg(BMM-1000), 10kg(BMM-2000)	√	√

Note: √ Standard Outfit, • Optional, \ Without this feature

Digital Biological Microscope



DM-125

DM-300M

Features:

- * The integration of structure design, to save space.
- * Valid moldproof design, it can be used under the high temperature and high humidity environment.

Technical Parameters:

Model		DM-125	DM-300M
Optical System	Infinite Optical System	/	√
	Finite Optical System	√	/
Viewing Head	Seidentopf Binocular Viewing Head Inclined at 30°, Interpupillary 47-78mm	√	/
	Seidentopf Trinocular Viewing Head Inclined at 30°, Interpupillary 47-78mm	•	/
	Seidentopf Binocular Viewing Head, 30° Inclined, Interpupillary 48-75mm	/	√
	Seidentopf Trinocular Viewing Head, 30° Inclined, Interpupillary 48-75mm	/	•
	MD101Microscope Camera with HD Monitor, 5M pixels, Colour CMOS	•	•
Eyepiece	Wide Field Eyepiece WF 10×/18	√	√
	Extra Wide Field Eyepiece EW10×/20 with Diopter Adjustment	/	•
Objective	Achromatic Objective 4×,10×,40×,100×	√	/
	Infinite Semi-plan Achromatic Objectives 4×,10×,40×,100×	/	√
	Infinite Plan Achromatic Objectives 4×,10×,40×,100×	/	•
Nosepiece	Backward Quadruple Nosepiece	√	/
	Quadruple Nosepiece	/	√
Stage	Double Layers Mechanical Stage 140mm×140mm/ 75mm×50mm	√	√
Condenser	NA1.25 Abbe Condenser	√	/
	Sliding-in Centerable condenser NA1.25	/	√
	Dark Field Condenser (Dry, Oil)	•	/
Focusing System	Coaxial Coarse and Fine Adjustment, Fine Division 0.002mm, Coarse Stroke 37.7mm per Rotation, Fine Stroke 0.2mm per Rotation, Moving Range 20mm	/	√
	Coaxial Coarse and Fine Adjustment, Fine Division 0.002mm, Moving Range 25mm	√	/
Illumination	6V/ 20W Halogen Lamp, Brightness Adjustable	•	•
	S-LED Illumination, Brightness Adjustable	√	√
Accessories	Phase Contrast Kit, Fluorescent Attachment, Polarization Set	•	•
Power Supply	AC 110~220V, 50/60HZ	√	√
Packing Size(mm)	380*270*470mm (DM-125 Main body) 350*350*640(DM-300M)	√	√
Gross Weight(kg)	8.5(DM-125 Main body); 12(DM-300M)	√	√

Note: √ Standard Outfit, • Optional, \ Without this feature Trinocular microscope can be installed camera and screen.

Digital Microscope



Technical Parameters:

	Specification	Model			
		BXTV-1	BXTV-1A	BXTV-1B	BXM-1B
Observation Head	Translating trinocular head 45° tilt	√	√		
	Hinge trinocular head 30° tilt			√	
Camera	Domestic CCD	√	√		
	Sony CCD			√	
	10-inch LCD screen				√
Nosepiece	Multi-roller four-aperture objective lens converter	√	√	√	√
Eyepiece	WF10X/18mm	√	√	√	
Objective Lens	Achromatic 4X, 10X, 40X (S), 100X (S, O)	√	√	√	
	Plan achromatic 4X, 10X, 40X (S), 100X (S, O)				√
Stage	Double-layer mechanical stage, platform size: 135*140mm	√	√	√	√
Condenser	Abbe NA1.25 condenser with variable aperture and filter, rack and pinion adjustable mechanism	√	√	√	√
Illumination	Built-in lighting 3W LED lamp	√	√	√	√
Power Supply	AC 100~240V, 50/60Hz	√	√	√	√
Package	Foam carton	√	√	√	√
Packing Size	250*360*460mm	√	√	√	
Gross weight	8kg	√	√	√	
Packing Size	330*280*440mm; 220*280*130mm				√
Gross weight	6kg; 3kg				√

Sony CCD:

Image Sensor	1/3 inch Sony CCD	Video Output	BNC 1.0VP
Signal System	PAL	Backlight Compensation	Off/On
Signal-to-noise Ratio	50dB AGC	Electronic Shutter	Automatic aperture
Horizontal Resolution	480 TV / 540 lines /700 lines	Camera Interface	CS
Minimum Illumination	0.01 Lux, F1.2	White Balance	Automatic
Gain Control	Automatic	Power Supply	DC 12V

Domestic CCD:

Image Sensor	1/3 inch Sony CCD	Video Output	BNC 1.0VP
Signal System	PAL	Backlight Compensation	Off/On
Signal-to-noise Ratio	50dB AGC	Electronic Shutter	Automatic aperture
Horizontal Resolution	700 lines	Camera Interface	CS
Minimum Illumination	0.01 Lux, F1.2	White Balance	Automatic
Gain Control	Automatic	Power Supply	DC 12V

Digital Biological Microscope



Technical Parameters:

Model	DM-18NS
View Head	Compensation free binocular head, Inclined at 30°, 360° rotatable, Interpupillary 55~75mm
Eyepiece	WF10X/22mm
Infinite Plan Achromatic Objective	4X, 10X, 40X(S), 100X(S,Oil)
Focusing	Coaxial Coarse & Fine Adjustable System, Range 30mm, Fine Division 0.002mm
Stage	Double Layers Mechanical Stage 180*150mm, Moving Range 75*50mm
Condenser	Abbe NA1.25 centerable condenser with Iris Diaphragm & Filter
Illumination	Halogen lamp 6V/20W, Kohler illumination, brightness adjustable
Filter	Blue, yellow, green
Imaging System	3M CMOS
Power Supply	AC85~240V, 50/60Hz
Package Size	380*300*580mm
Gross Weight	8.4kg

Build-in Camera Biological Microscope



BMB-117M



BMB-300M

Technical Parameters:

Model				BMB-117M	BMB-300M
Viewing Head	Compensation Free Binocular Head, Inclined at 30°, Interpupillary Distance 48-75mm			√	√
	Camera System	Valid Pixel	1280*1024(1.3M Pixel)	√	/
			1600*1200(2.0M Pixel)	●	/
			2048*1036(3.0M Pixel)	●	√
			2052*1944(5.0M Pixel)	/	●
		Output Mode	USB2.0	√	√
		Operation System	WINDOWS7/8 2000 / XP/ VISTA	√	√
Eyepiece	WF10×/18			√	√
	P16×/11			●	/
	Extra wide filed eyepiece EW10×/20 with diopter adjustment			/	●
	Infinite plan Achromatic Objective 4×, 10×, 40×, 100×			√	/
Objective	Infinite plan Achromatic Objective 4×, 10×, 40×, 100×			/	√
	Infinite Plan Achromatic Phase Objective 10×,20×,40×,100×			/	●
	Oil Darkfield Objective with Iris Diaphragm 100×(NA0.36-1.25)			/	●
	Backward Quadruple Nosepiece			√	/
Nosepiece	Quintuple Nosepiece			/	/
	Quadruple Nosepiece			/	√
	Double Layers Mechanical Stage 140*140mm, Moving range 75*50mm			√	√
Condenser	Abbe NA1.20 with Iris Diaphragm & Fliter			√	/
	Swing Condenser N.A.0.9/0.25			/	√
	Turret Phase Contrast Condenser			/	●
	Dark Field Condenser (Dry)			/	●
	Dark Field Condenser (Oil)			/	●
Focusing	Coaxial Coarse & Fine Adjustment System, Range 24mm, Fine Division 0.004mm			√	/
	Coaxial Coarse & Fine Adjustment System, Range 20mm			/	√
Illumination	LED 3W, Brightness Adjustable			√	/
	Halogen Lamp 6V/20W, Brightness Adjustable			●	/
	S-LED Powerful Illumination			/	√
Power Supply	AC 110~220V, 50/60HZ			√	√
	Phase Contrast Kit			●	●
	Dark-Field Attachment			●	●
Accessories	Polarization Attachment			●	●
	396*262*492mm(BMB-117M), 334*334*533mm(BMB-300M)			√	√
Gross Weight	7.5kg (BMB-117M), 12.5kg (BMB-300M)			√	√

Note: √ Standard Outfit, ● Optional, \ Without this feature

Polarizing Biological Microscope



BMP-107B

Features:

With the features of easy operation, complete functions and economy, it is an ideal instrument in geology, petroleum, coal, chemicals and physic fields. It is also widely used in academic demonstration and scientific research.

Technical Parameters:

Model		BMP-107B	BMP-107T
Viewing Head	Sliding binocular head at 45°, 360° rotatable	√	\
	Sliding trinocular head at 45°, 360° rotatable	\	√
Eyepiece	Eyepiece WF10×/18 with scale of crosshair	√	√
	Eyepiece WF10×/18	√	√
Objective	Strain free achromatic objective 4×, 10×, 40×	√	√
Nosepiece	Toward quadruple nosepiece, center adjustable	√	√
Analyzer	Rotatable analyzer with gradation 0°~90°	√	√
Bertrand Lens	Bertrand lens, sliding in/ out of optical path	√	√
Optical Compensator	λ slip(first class red)	√	√
	1/ 4λ slip	√	√
	Quartz wedge	√	√
Revolving Round Stage	Diameter Φ160mm, graduated in1° increments, Minimum resolution 6' when using vernier scale	√	√
Condenser	Abbe condenser with Iris diaphragm & filter	√	√
Focusing	Coaxial coarse & fine adjustment, range 28mm, fine division 0.002mm	√	√
Polarizer	Sliding in/out of optical path, located on the top of collector	√	√
Illumination	6V/ 20W halogen lamp, brightness adjustable	√	√
Power Supply	AC 110~220V, 50/60HZ	√	√
Package Size	327*273*425mm	√	√
Gross Weight	7.5kg	√	√

Note: √ Standard Outfit, ● Optional, \ without this feature Trinocular microscope can be installed camera and screen.

Fluorescence Biological Microscope



Technical Parameters:

Model	BFM-31
Eyepiece	WF10×/22mm
View Head	Hinged trinocular viewing head inclined at 30°
Objective	Infinite plan achromatic objectives 4x, 10x, 40x, 100x
Fluorescence Accessories	Standard: Blue (B) excitation: 460~490 nm Optional: Green (G) excitation: 510~550 nm Ultraviolet (UV) excitation: 330~380 nm Blue-ultraviolet (BU) excitation: U: 330~380 nm; B: 460~490 nm Blue-green ultraviolet (BGU) excitation: U: 330~380 nm; B: 460~490 nm; G: 510~550 nm
Focusing System	Coaxial coarse and fine focusing with locking and limit devices, fine adjustment value 2μm, coarse movement stroke per circle 40mm, fine movement stroke per circle 0.2mm, focusing range 24mm
Nosepiece	Standard: Inward 4-hole nosepiece; optional: 5-hole nosepiece
Stage	Double-layer movable platform (size: 210mm*140mm, moving range: 76mm*50mm)
Transmitted Illumination System	Abbe condenser N.A.1.25, white LED, brightness adjustable
Power Supply	AC100~240V, 50/60Hz
Packing Size(L*W*H)	485*340*640mm
Gross Weight	13.3kg



Technical Parameters:

Model	BFM-43
Eyepiece	WF10×/23mm
View Head	Hinged Trinocular Viewing Head Inclined at 30°, interpupillary 50~75mm
Objective	Infinity plan semi-apochromat objective: 4x/0.13mm WD, 17.15mm Infinity plan semi-apochromat objective: 10x/0.3mm WD, 7.68mm Infinity plan semi-apochromat objective: 40x/0.75mm WD, 0.78mm Infinity plan semi-apochromat objective: 100x/1.30mm WD, 0.15mm
Fluorescence Accessories	Standard: ① UV Bandpass: 355/50nm; DM: 410nm; EM: 420nm (LP); ② Blue Bandpass: EX: 475/30nm; DM: 500nm; EM: 520nm (LP); ③ Green Bandpass: EX: 530/40nm; DM: 570nm; EM: 590nm (LP).
Nosepiece	5-hole nosepiece
Stage	Highly wear-resistant ceramic-coated stage, 80*50mm travel, 1mm/division, 0.1mm accuracy
Transmitted Illumination System	Warm white LED, continuously adjustable brightness, Abbe condenser, N.A. 1.1
Power Supply	AC100~240V, 50/60Hz
Packing Size(L*W*H)	470*400*480mm; 490*380*750mm
Gross Weight	17.1kg; 12.4kg

Fluorescence Biological Microscope



XY-1



XY-2

Technical Parameters:

Model	XY-1/XY-2
View Head	Binocular observation head (XY-1), trinocular observation head (XY-2)
Fluorescent Direct Lighting	Choose B (blue) or G (green) excitation light filter system as standard, O ordinary light system LED light
Protective Screen	UV protection shield (Only when optional for UV light)
Nosepiece	Four-aperture nosepiece
Achromatic Objectives	4X, 10X, 40X, 100X (oil)
Power Supply	AC100~240V, 50/60Hz
Packing Size	320*270*425mm; 150*300*250mm
Gross Weight	7kg; 3kg



Technical Parameters:

Model	BFM-52
Eyeiece	WF10×/22mm
View Head	Binocular viewing head, interpupillary distance adjustment range: 53~75mm
Objective	Plan achromatic objective 4× Long working distance plan objective 10× Long working distance plan objective 40× Long working distance plan phase contrast objective 10×PH Long working distance plan phase contrast objective 20×PH Long working distance plan phase contrast objective 40×PH (Optional)
Fluorescence Accessories	Standard: Ultraviolet (UV) EX: 375/28nm; DM: 415nm; EM: 460/50nm Blue (B) EX: 470/40nm; DM: 505nm; EM: 535/40nm Green (G) EX: 530/40nm; DM: 565nm; EM: 605/55nm
Focusing System	Coaxial coarse and fine adjustment, equipped with limit device and locking device, low hand position coaxial focusing hand wheel, fine adjustment hand wheel value 2μm, focusing stroke 11mm
Nosepiece	5-hole nosepiece
Stage	(1) Fixed stage size: 227*208mm; mechanical movement, range of movement: 135*77mm (2) Round transparent stage plate: outer ring φ118mm, inner ring φ68mm (3) Inner groove size of culture dish holder: 86*129.5mm, suitable for round culture dishes φ90mm (4) Equipped with universal sample clamp: outer size 128*86mm; inner groove specifications: 82*56mm, 77*33mm, 77*26mm, also suitable for culture dishes φ35mm, φ50mm, φ60mm, φ68mm (5) Flip plate (optional)
Illumination System	Brightfield illumination system: Ultra-long-life 9W LED light source with a lifespan of over 20,000 hours and adjustable brightness. Fluorescent illumination system: LED cold light source with continuously adjustable brightness.
Power Supply	AC100~240V, 50/60Hz
Packing Size(L*W*H)	485*340*640mm; 364*304*155mm
Gross Weight	16kg; 2.3kg

Trinocular Inverted Microscope



BMI-37XC



BMI-37XE

Technical Parameters:

Model		BMI-37XC	BMI-37XE
Optical System		Infinite optical system	
View Head		Compensation free trinocular head, Inclined at 45°, 360° rotatable, Interpupillary 48~75mm	
Eyepiece		WF10X/22mm, P16X/20mm	P10X/20mm
Objective	Infinite LWD	4X N.A=0.10 WD=25.00mm	10X N.A=0.25 WD=4.27mm
	Plan Achromatic	40X N.A=0.60 WD=3.30mm	20X N.A=0.40 WD=8.00mm
	Objective		40X N.A=0.60 WD=3.50mm
	Infinite LWD	10X N.A=0.25 WD=8.10mm	10X N.A=0.25 WD=4.27mm
	Plan Phase	20X N.A=0.40 WD=4.80mm	20X N.A=0.40 WD=8.00mm(Optional)
	Contrast Objective	40X(Optional)	40X N.A=0.60 WD=3.50mm(Optional)
Focusing		Coaxial coarse & fine adjustable system, pinion and rack adjustable, fine division 0.002mm	
Stage		242*172mm, glass slide ø110mm, moving range 120*75mm	Culture dish plate 1: 86*129.5mm, Ø87.5mm round culture dish is adaptive Culture dish plate 2: 34*77.5mm, Ø68.5mm round culture dish is adaptive Culture dish plate 3: 57*82mm, Ø60mm round culture dish is adaptive
Condenser		ELWD Condenser with Iris Diaphragm & Filter, LWD 75mm	
Illumination		Halogen lamp 12V/30W, brightness adjustable	LED lamp, 9W, brightness adjustable
Power Supply		AC85~240V, 50/60Hz	
Package Size		655*305*630mm	650*430*600mm
Gross Weight		14kg	16kg

Inverted Biological Microscope



Technical Parameters:

Model	BMI-39XD
Optical System	Infinite optical system
View Head	Compensation Free Trinocular Head, Inclined at 45°, 360° rotatable, interpupillary 47~78mm
Eyepiece	WF10X/22mm
Infinite Plan Phase Achromatic Objective	4X N.A=0.30 WD=7.40mm
	20X N.A=0.45 WD=7.50~8.80mm
	40X N.A=0.60 WD=3.00~4.40mm
Focusing	Coaxial Coarse & Fine Adjustable System, Range 30mm, Fine Division 0.002mm
Stage	Three Layers Mechanical Stage 340*230mm, Moving Range 130*85mm
Condenser	ELWD condenser NA0.3, LWD 26mm
Illumination	Transmission illumination:Halogen lamp, 12V/100W, Kohler illumination Epi-illumination:100w fluorescent mercury lamp
Filter	Blue, yellow, green
Imaging System	2000W CMOS Camera, MCL-Z adapter
Power Supply	AC85~240V, 50/60Hz
Package Size	820*880*570mm
Gross Weight	32kg

Inverted Biological Microscope



- Features:**
- * Excellent optical function with infinite optical system.
 - * Innovative stand structure, sharp image display, convenient operation and special design for viewing incubating cell tissue.

Technical Parameters:

Model	BMI-100		
Optical System	Infinite optical system		√
Viewing Head	Trinocular head inclined at 30°, interpupillary distance 48~75mm		√
Eyepiece	High-point, extra wide field eyepiece EW10×/ 22		√
Objective	LWD infinite plan objective	4×/ 0.1, WD 17.3mm;	√
		10×/ 0.25, WD 10mm;	●
		20×/ 0.4, WD 5.1mm;	●
		40×/ 0.6, WD 2.1mm	√
	Infinite plan phase objective	PH10×/ 0.25, WD 10mm;	√
		PH20×/ 0.4, WD 5.1mm;	√
		PH40×/ 0.65, WD 2.1mm	●
Nosepiece	Quintuple nosepiece		√
Condenser	ELWD condenser NA 0.3, LWD 72mm (without condenser 150mm)		√
Centering	Centering telescope (Φ30MM)		●
Phase Annulus	10×-20×, phase annulus plate (fixed)		√
	10×-20×, 40× phase annulus plate (adjustable)		●
Stage	Plain stage 160×250mm		√
	Glass insert		√
	Attachable mechanical stage, X-Y coaxial control, moving rang120×78mm		●
	Auxiliary stages70×180mm		√
	Terasaki holder		●
	Φ35mm petri dish holder		●
	Φ54mm slide glass holder		●
	Φ90mm petri dish holder		●
Focusing	Coaxial Coarse and Fine Adjustment, Fine Division 0.002mm, Coarse Stroke 37.7mm per Rotation, Fine Stroke 0.2mm per Rotation, Moving Range up 8mm, down 3mm		√
Illumination	Halogen lamp 6V/ 30W		√
	LED		●
Filter	Blue, green and ground glass, diameter 45mm		√
Power Supply	AC 110~220V, 50/60HZ		√
Accessories	Inverted flurescent attahement FL-100, photo attachment, video adapter with C mount		●
Package Size	468*397*665mm		√
Gross Weight	15.5kg		√

Note: √ Standard Outfit, ● Optional Trinocular microscope can be installed camera and screen.



Technical Parameters:

Model	BMI-202		
Optical System	Infinite optical system		√
Viewing Head	Seidentopf trinocular viewing head, Inclined at 45°, 360° rotatable, Interpupillary 48~75mm		√
Eyepiece	wide field eyepiece WF10×/22, eyepiece tube diameter 30mm		√
	Wide field eyepiece WF15×/16		●
	Wide field eyepiece WF20×/12		●
Objective	LWD infinite plan achromatic objective 4×/0.10 WD=22		√
	LWD infinite plan achromatic phase objective	10×/0.25 WD=6	√
		20×/0.4 WD=3.1	√
		40×/0.55 WD=2.2	√
	High-level phase contrast objective	10×/0.25 WD=6	●
		20×/0.4 WD=3.1	●
		40×/0.55 WD=2.2	●
	Lamp house adjustment objective		●
Nosepiece	Backward quintuple nosepiece		√
Condenser	ELWD condenser NA0.3, LWD72mm(without condenser 150mm)		√
Centering Telescope	Centering telescope(φ30mm)		√
Phase Annulus	10×, 20×, 40× phase annulus plate(adjustable)		√
Stage	Plain stage 230×170		√
	Glasse insert		√
	Attachable mechanical stage, X, Y coaxial control, moving rang 80×120mm		√
	Auxiliary stage		√
	Terasaki holder		√
	Petri dish holder φ38		
	Petri dish holder φ54		√
Focusing System	Coaxial coarse and fine adjustment, fine division 0.002mm, moving range up 4.5mm down 4.5mm		√
Illumination	6V, 30W halogen lamp, brightness adjustable		√
Filter	Blue, green and ground glass, diameter 45mm		√
Power Supply	110~220V, 50/60Hz		√
Accessories	Photo attachment		●
	C Mount 0.4×		●
Package Size	630*350*620mm		√
Gross Weight	15kg		√

Note: √ Standard Outfit, ● Optional Trinocular microscope can be installed camera and screen.

Metallurgical Microscope



XJD-100



XJD-200



XDS-1



4XC

Technical Parameters:

	Specification	Model			
		XJD-100	XJD-200	XDS-1	4XC
Observation Head	Monocular observation head tilted 45°	√			
	Articulated binocular observation head tilted 45°		√		
	Translational sliding trinocular observation head 45° tilt			√	
	Articulated trinocular viewing head tilted 30 °				√
Nosepiece	Four-aperture nosepiece	√	√	√	√
Eyepiece	WF10X	√	√		
	WF10 X 18 mm			√	√
Objective Lens	Achromatic objective lens: 10X, 100X	√	√		
	LWD plan achromatic objective: 40X				
	Achromatic Objective lens 4X, 10X, 40X, 100X			√	
	LWD plan achromatic objectives 10X, 20X, 40X, Achromatic objective lens 100X				√
Stage	Double-layer mechanical platform 180*150mm moving range 15*15mm				√
	Double-layer mechanical platform 140*135 mm moving range 70*50 mm			√	
	Double-layer mechanical stage 175*135mm	√	√		
Focusing	Coaxial coarse and fine focusing, using rack and pinion mechanism, fine focusing value 0.002mm	√	√	√	√
Illumination	Built-in lighting, halogen lamp 6V/20W	√	√		√
	LED lighting			√	
Filter	Blue, green, yellow	√	√	√	√
Polarized Light				√	
Power Supply	AC100~240V, 50/60Hz	√	√	√	√
Packing Size		420*350*520mm		330*280*440mm; 370*260*470mm	400*300*450mm
Gross Weight		10kg		6.5kg; 5kg	11kg



Technical Parameters:

Model		MM-5000
Optical System	Infinite optical system	√
Extra Wide Field Eyepiece	EW10×/22	√
	EW10×/20 eyepiece with scale of cross hair	√
	EW15×/16	●
	EW20×/12	●
Infinite LWD Plan Achromatic Objective	5×/0.12/∞/0(BF/DF) LWD 10mm	√
	10×/0.25/∞/0(BF/DF) LWD 10mm	√
	20×/0.4/∞/0(BF/DF) LWD 5mm	√
	50×/0.75/∞/0(BF/DF) LWD 1.3mm	√
	100×/0.9/∞/0(BF/DF) LWD 0.7mm	√
Viewing Head	Siedentopf binocular viewing head, Inclined at 30°, Interpupillary 48~75mm	√
Kohler Incident Light	12V/50W halogen light, center and brightness adjustable	√
	Polarizer and analyzer	√
	DIC	●
	Built-in green, blue, yellow, gray and ground glass	√
Focusing	Coaxial coarse and fine adjustment, fine division 2μm,	√
Nosepiece	Backward quintuple nosepiece	√
Stage	Double layer mechanical stage 226×178mm, Moving range 40mm×40mm	√
	Stage Φ20, Φ30, teardrop	√
Accessories	Photo/Video attachment	●
	Micrometer scale 0.01mm	√
Power Supply	AC110/220V±10%, 50/60Hz	√
Package Size	730*350*550mm	√
Gross Weight	18kg	√

Note: √ Standard Outfit, ● Optional Outfit

Teaching Microscope



BBM-18F2



BBM-18F3



BBM-18F5

Technical Parameters:

Model	BBM-18F2	BBM-18F3	BBM-18F5	
Optical System	Infinite optical system			
View Head	Compensation free binocular head, Inclined at 30°, 360° rotatable, Interpupillary 55~75mm	Compensation free binocular head, Inclined at 30°, 360° rotatable, Interpupillary 50~75mm		
Eyepiece	WF10X/22mm			
Infinite Plan Achromatic Objective	4X, 10X, 40X(S), 100X(S, Oil)			
Focusing	Coaxial Coarse & Fine Adjustable System, Fine Division 0.002mm			
Stage	Double Layers Mechanical Stage 180*150mm, Moving Range 75*50mm	Double Layers Mechanical Stage 180*160mm, Moving Range 80*50mm		
Condenser	Abbe NA1.25 centerable condenser with Iris Diaphragm & Filter			
Indicator	LED cursor indicator			
Illumination	LED lamp 5V/5W, Kohler illumination, brightness adjustable	LED lamp 5V/10W, Kohler illumination, brightness adjustable		
Filter	Blue, yellow, green			
Power Supply	AC85~240V, 50/60Hz			
Package Size	390*290*650mm	720*550*480mm	720*550*480mm	
Gross Weight	11kg	22kg	29kg	

Stereo Zoom Microscope



SZM-EB2040C SZM-E2040C SZM-E40X SZM-E0745C SZM-E0745CS SZM-E0745CLT SZM-E0745CLTS

Technical Parameters:

Model		SZM-EB2040C	SZM-E2040C	SZM-E40X
Objective	2x Objectives	/	/	/
	4X Objectives	/	/	√
	2X&4X Objectives Can Convertible	√	√	/
Eyepiece	Wide Field Eyepiece: WF10X (WF20X optional)	√	√	√
	Binocular, tilted 45°Pupil distance 48-75mm	√	√	/
Viewing Head	Binocular, 90°Straight cylinder, Pupil distance 48-75mm	/	/	√
	φ60 black and white tabletop, slicing and pressing	/	/	√
Base	φ90 black and white tabletop, slicing and pressing, complimentary φ90 glass panels	260*380*20mm Large flat base	√	/
	No light source	√	/	√
Light Source	Upper light source	/	/	/
	Up and down light sources	/	√	/
Lighting	100-230V/12V5W LED	/	√	/
Package Size(W*D*H)mm		390*240*370	370*180*300	160*220*310
Gross Weight(kg)		4.5	3.2	1.7

Technical Parameters:

Model		SZM-E0745C	SZM-E0745CS	SZM-E0745CLT	SZM-E0745CLTS
Objective	0.7- 4.5X zoom objective	√	√	√	√
Eyepiece	Wide Field Eyepiece: WF10X (20mm) (WF20X optional)	√	√	√	√
	Binocular, tilted 45°Pupil distance 48-75	√	√	√	√
Base	90°straight tube, C-interface	/	/	/	/
	260*380*20mm	/	/	/	/
	200*255*22mm	/	/	/	/
	200*255*60mm	√	√	/	/
	205*275*40mm	/	/	√	√
Light Source	No light source	√	/	/	/
	Upper light source	/	/	√	/
	Up and down light sources	/	/	/	√
	Can optional LED circular light	√	√	√	√
Lighting	100-230V/ 12V5W LED	√(Optional: 220V/6V20W or 110V/6V20W halogen lamp)	√(Optional: 220V/6V20W or 110V/6V20W halogen lamp)	√	√
Package Size(W*D*H)mm		515*268*380	515*268*380	510*360*295	510*360*295
Gross Weight(kg)		6.2	6.5	7	7.5

Stereo Zoom Microscope



Technical Parameters:

	Specification	Model	
		SZM-45	SZM-45T
Observation Head	Binocular observation head tilted 45 °	√	
	Trinocular body tilted 45°		√
	Digital stereoscope body 45° tilt		
Eyepiece	High point wide field of view adjustable eyepiece WF10X	√	√
Zoom Objective	0.7X~4.5X	√	√
Zoom Ratio	6.4:1	√	√
Working Distance	100mm	√	√
Focusing Bracket	Focusing frame adjustment knob	√	√
Interpupillary Distance	5.4~7.6mm	√	√
Uplighting	LED lights	√	√
Downlighting	LED lights	√	√
Power Supply	AC100~240V, 50/60Hz	√	√
Package	Foam carton	√	√
Packing Size	mm	500*260*370	
Gross Weight	kg	8	

Model	ST-20	ST-40	ST-60
Lighting	Natural light binocular	Transmissive illuminator/oblique light binocular	Ring light binocular
Observation Head & Main Body	Straight head	Tilt observation, rotatable body	Tilt viewing body can be rotated 360°
Objective Lens	2X	2X&4X, rotate 90°	2X&4X, 360° rotation
Working Distance	80mm	57mm	100mm
Eyepiece	WF10X		WF10X
Power Supply	/	AC100~240V, 50/60Hz	
Packing Size	300*200*150mm	360*170*290mm	400*250*360mm
Gross Weight	3kg	6kg	8kg



Technical Parameters:

Model	SZM-XTZD		
Eyepiece (Working distance 100mm)	10X, φ22mm	Magnification	Field diameter
		7X	28mm
		45X	4.3mm
Objective (Working distance 30mm)	20X, φ10mm (Optional)	Magnification	Field diameter
		14X	14.3mm
		90X	2.2mm
Objective (Working distance 30mm)	2X (Optional)	Magnification	Field diameter
		28X	7.1mm
		180X	1.1mm
Magnification	7~45X		
Interpupillary Distance	55mm~75mm		
Focusing Bracket	Hole, φ76mm		
Slide Focusing Range	60mm		
Working Distance	235mm		
Light Source	12V 3W, LED light		
Stage	Glass stage, φ95mm		
Base Size	Size: 275mm*205mm, thickness: 33mm		
Power Supply	AC100~240V, 50/60Hz		
Package Size (W*D*H)	490*415*330mm		
Gross Weight	8kg		

Biological Microscope



BM-2CBAD

BM-2CBAP


BM-8CAD

BM-8CAP

Technical Parameters:

Model	BM-2CBAD	BM-2CBAP	BM-8CAD	BM-8CAP
Viewing Head	Trinocular head, inclined at 30°, 360° rotatable, Interpupillary 55~75mm, Mechanical tube length 160mm			
Eyepiece	P10X/18mm, P16X/11mm			
Objective	4X N.A=0.10 WD=37.5mm 10X N.A=0.25 WD=7.31mm 40X N.A=0.65 WD=0.63mm 100X(Oil) N.A=1.25 WD=0.18mm			
Stage	Mechanical Stage 130*125mm, Moving Range 70*30mm, Cursors 0.1mm		Mechanical Stage 140*140mm, Moving Range 75*50mm, Cursors 0.1mm	
Focusing	Coaxial Coarse & Fine Adjustable System, Range 15mm, Fine Division 0.002mm		Coaxial Coarse & Fine Adjustable System, Range 30mm, Fine Division 0.002mm	
Condenser	N.A.1.25 Adjustable Medium Abbe condenser with variable light bar			
Filter	Blue, yellow, green			
Illumination	LED lamp 5V/1W, brightness adjustable		Halogen lamp 6V/20W, Kohler illumination, brightness adjustable.	
Imaging System	Digital CMOS camera, 2M pixels, with geometric measurement and analysis software, C interface	9-inch large screen display	Digital CMOS camera, 5M pixels, with geometric measurement and analysis software, MCL-Z adapter lens	10.5-inch screen Android tablet with special adapter lens
Power Supply	AC85~240V, 50/60Hz			
Package Size (L*W*H)	355*245*590mm	365*255*610mm	425*330*450mm	
Net Weight	6kg	6kg	8kg	10kg
Gross Weight	6.5kg	6.5kg	8.5kg	10.5kg

Atomic Force Microscopy

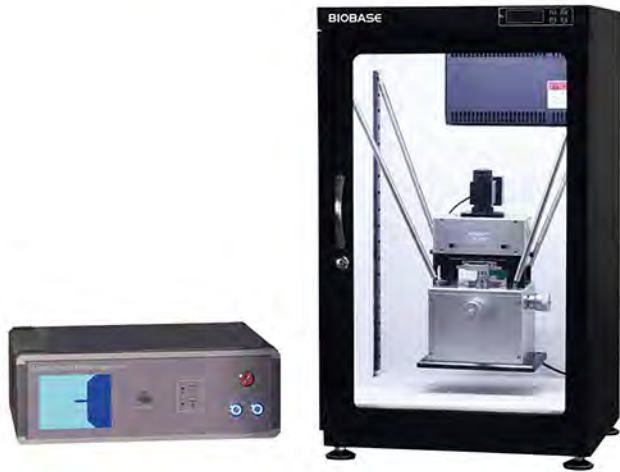

Features:

- * Integrated scanning-probe and sample-stage enhances the anti-interference ability of the spring suspension system.
- * Precision laser and probe positioning device makes probe changing and spot adjusting simple and convenient.
- * The sample-to-probe auto-approaching provides an efficient way to prevent cantilever crash.
- * The vertical sample probe approaching allows achieving precise positioning of area of interest.
- * Sample scanning area of interest may be freely selected with an high-precision/wide-range XY table.
- * Top-view CCD system warrants real-time observation and positioning of the probe on the selected sample region.
- * Modular design of electronic control system facilitates maintenance and continuous improvements.
- * The compact model 2000 may be easily transported inside an aluminum luggage.
- * The hermetic box in model 1000 provides a controlled environment.

Technical Parameters:

Model	BK-AFM1000
Working Modes	Contact mode and tapping mode Optional modes: Phase, Friction (LFM), Magnetic (MFM), Electrostatic (EFM)
Sample Size	Φ≤90mm, H≤20mm
Scanners Available	10*10μm, 20*20μm, 50*50μm,100*100μm
Scanning Resolution	0.2nm in XY direction, 0.05nm in Z direction
Range of Sample Movement	±6.5mm
Step-motor Pulse Width	10±2ms
Image Sampling Points	512*512
Optical Magnification 4X	Optical resolution 2.5μm
Scan Rate 0.6Hz~4.34Hz	Scan angle 0°~360°
Scanning Control	18-bit D/A in XY direction, 16-bit D/A in Z direction
Data Sampling	14-bit A/D, double 16-bit A/D multi-channel synchronous sampling
Feedback	DSP digital feedback
Feedback Sampling Rate	64kHz
Computer Interface	USB 2.0
Operating System	Windows XP/7/8/10
Supply Power	AC220V, 50/60Hz; 110V, 50/60Hz(optional)
Package Size	550*550*1150mm
Gross Weight	65kg

Sample Pre-Processing

Semi Automated Plate Sealer

Application:

The Semi-Automated Plate Sealer is used for sealing a wide variety of microplates (Elisa, cell culture, PCR and deep-well plates) to store samples, prevent evaporation and minimize contamination. It is applicable for a variety of heat seals, meeting any laboratory application, including PCR, coulometric, fluorescence, long term storage. A plate sensing system allows to provide uniform force, transferring heat evenly to the sealing surface whether using PCR plates or deep-well plates.

Features:

- * Rapid heating(reaching 170C in 300seconds)
- * Adjustable Sealing Temperature: 80°C ~170°C
- * OLED display screen, high light.
- * Applicable for different micro plates and heat seals.
- * Precise temperature, timing and pressure for consistent sealing.
- * Compact footprint: only 178mm wide x 370mm depth

Technical Parameters:

Model	BK-PS1000
Display	OLED
Temperature Accurate	±1°C
Seal Time	0.5s~10s(increment of 0.1s)
Seals Plate Heights	9~48mm
Compatible Plate Materials	PP(Polypropylene); PS(Polystyrene); PE(Polyethylene)
Compatible Plate Types	Standard Assay Plates
	Deep-well Storage Plates
	PCR Plates: skirted, semi-skirted, non-skirted
Power	300W
Compatible Sealing Film Types	Foil-polypropylene laminate
	Clear polyester-polypropylene laminate
	Clear polymer
	Thin clear polymer
Sealing Temperature	OFF, 80°C~200°C (increment of 1.0°C)
Power Supply	AC220V, 50/60Hz; AC110V, 50/60Hz
Standard Blocks	Deep hole plate /ELISA plate adapters;96-hole microtiter plate adapter
Optional Blocks	384 hole microtiter plate adapter
External Size(W*D*H)	370*178*330mm
Package Size(W*D*H)	420*270*460mm
Net/Gross Weight	12/13kg



Microplate Incubator



Introduction:

The microplate incubator adopts micro-processing technology combined with PID control method, which has the advantages of small size, light weight, and no pollution; LCD displays temperature and time, and is easy to operate. Mainly used for incubation of ELISA plates (96-well/384-well plates), 96-well cell culture plates, etc.

Features:

- * Powder-coated steel shell, sturdy and durable.
- * Adopt intelligent fuzzy PID control and double-layer heating system to ensure the stability and accuracy of temperature.
- * With Fahrenheit and Celsius switching function.
- * Timing mode, timing mode, timing unit are all selectable.
- * With temperature self-tuning function, 2 interval PID control, 3 stage temperature slope correction.
- * With lock screen function, password unlock.
- * With temperature sensor failure alarm prompt, the controller automatically cuts off the heating output.

Technical Parameters:

Model	BJPX-DH2	BJPX-DH4
Temp. Control Range	RT.+5°C~90°C	
Timing Range	1~9999hour/minute/∞	
Temp. Accuracy	≤±0.5°C	
Display Accuracy	0.1°C	
Temp. Uniformity	≤±0.5°C	
Heating Time	≤10min (from 30°C to 90°C)	
Capacity	2pcs microplates or culture plates	4pcs microplates or culture plates
Power Supply	AC100V~245V, 50/60Hz	
Product Size(W*D*H)	250*300*200mm	250*430*200mm
Net Weight	6.5kg	8.8kg
Package Size(W*D*H)	310*360*260mm	310*500*260mm
Gross Weight	7.7kg	10kg

Thermo Shaker



Features:

- * 7.0-inch LCD display, which shows real-time information such as current temperature, speed and time.
- * Double-layer heating system, precisely controlled at RT+5°C to 80°C.
- * The microprocessor control ensures excellent temperature stability and uniformity.
- * Speed range: 200~1800 rpm. Driven by a DC brushless motor, with stable speed.
- * It can accommodate two standard microplates, allowing for effective mixing and incubation of small samples.
- * The working time can be set arbitrarily within the range of 1min~99h59min. Once the program finishes running, the alarm signal will be issued.

Technical Parameters:

Model	BK-MDT2
Speed Range	200~1800rpm
Shaking Amplitude	3mm
Temperature Control Range	Rt+5~80°C
Thermal Cover	Yes
Temperature Uniformity	≤±0.5°C
Temperature Accuracy	≤±0.5°C
Heating Up Time	≤10min(25°C~80°C)
Timing Range	1min~99h59min
Sample Processing Volume	2 standard microplates
Display	7.0-inch touch screen display
Consumption	200W
Power Supply	AC110/220V±10%, 50/60Hz
External Dimension(W*D*H)	345*285*207mm
Net Weight	7.4kg
Packing Size(W*D*H)	544*339*249mm
Gross Weight	8.2kg

Thermo Shaker for Microplates



Features:

- * Support 6 standard microplates and deepwell plates.
- * Support 6 plates timing independently.
- * With a wrap-around heating lid design, two options for heating lid temperature control: automatic or manual.
- * Automatic preheating function.
- * Automatic power recovery function.
- * Automatic fan function.
- * Temperature calibration function.

Technical Parameters:

Model	BK-MST400
Temp Setting Range	0°C~100°C
Temp Control Range	RT+5°C~100°C
Time Range	1min~99h59min/∞
Speed Range	200~1600rpm
Orbit	3mm
Temp Accuracy	≤±0.5°C@37°C
Display Accuracy	0.1°C
Temp Uniformity	≤±0.5°C@37°C
Heating Time 1	<5min(from 25°C to 60°C)
Heating Time 2	≤20min(from 25°C to 100°C)
Auto Preheating	Yes
Preheating Setting Range	37°C~100°C
Pause Function	Yes
Auto Resume to Run	Yes
Auto Fan Function	Yes
Independent Timing Function	Yes
Heating Lid Temp. Control Mode	Automatic/Manual
Multi Point Running	Yes(Max. 5points)
Multi Cycle	Yes(Max. 99times)
Capacity	6 Microplates or Deepwell plates
Consumption	480W
Power Supply	AC220V,50/60Hz, AC110V,50/60Hz
External Size(W*D*H)	481*346*228mm
Net Weight	15kg
Packing Size(W*D*H)	580*440*350mm
Gross Weight	17kg

Microplate Shaker

- Features:

 - * Open tray and sample access are more convenient.
 - * Small volume, large processing capacity.
 - * Adjustable speed and timer.
 - * Brushless DC motor.



Technical Parameters:

Model	BK-VX1800
Motor Type	DC motor
Shaking Amplitude &Type	3mm, Horizontal rotation
Rotary Range	200~1800rpm
Plate Type	Elisa plate, cell culture plate, deep hole plate
Timing Range	0~100h/Continuous
Module Material	Sponge
Control Type	Digital display panel, key control
Ambient Condition	5~40℃, 80% RH
Rated Power	20W
Power Supply	AC100~240V, 50/60Hz
External Size	420*305*147mm
Net Weight	16kg
Packing Size	492*382*219mm
Gross Weight	19kg

- Features:

 - * LCD display system status and parameters.
 - * Stable and reliable shaking.
 - * Easy to operate with one touch knob.
 - * Automatic fault detection and buzzer alarm function.
 - * 12-month warranty.



Technical Parameters:

Model	BK-TS100
Time Range	1min~99h59min
Mixing Orbit	3mm
Sample Capacity	4plates
Speed Range	200~1500rpm
Speed Step Value	10rpm
Consumption	45W
Power Supply	AC110~240V, 50/60Hz
Dimension	280*270*140mm
Packing Size(W*D*H)	440*360*260mm
Weight	4.0kg
Gross Weight	6.5kg

Denaturation & Hybridization System



- Features:

 - * This instrument is adopted FISH processing step, which can reduce a lot of manual operating time and avoid the damage of harmful reagent.
 - * Full touch screen operation, friendly human interface.
 - * Support restart functionality runs an unexpected power outage, when power is restored can be scheduled to automatically back up and running.
 - * Supporting automatic cooling function after running over.
 - * Supporting automatic warm-up function.
 - * Platform high precision of temperature control, low fluctuation.
 - * Can deal with 12 slides.
 - * Support 105 custom programs stored functions.
 - * Integrated denaturation and hybridization, hybrid, multiple-step operation three modes of operation.

Technical Parameters:

Model	BK-DH2000
Temperature Control Range	RT+5℃~100℃
Temperature Setting Range	0℃~100℃
Capacity	12 Slides
Temperature Accuracy	≤±1℃
Temperature Uniformity	≤±1℃
Timing Range	1min~99h59min
Heating Time(37℃ to 95℃)	≤2min
Cooling Time(95℃ to 45℃)	≤6min
Power	350w
Power Supply	220V, 50/60Hz; 110V, 60Hz
External Size(L*W*H)	440*220*120mm
Packing Size(W*D*H)	580*370*300mm
Gross Weight	7kg

Gel Card Incubator



Introduction:
BK-RC24 is a lab device for easy gel card incubation. It has two incubation modules that keep a constant temperature. This boosts lab efficiency and accuracy, making it ideal for labs doing long-term, large-scale card incubation.

- Features:**
- * Two independent incubation modules with separate temperature and timing controls.
 - * Each module can hold 12 cards for efficient sample processing.
 - * Microprocessor control ensures excellent temperature stability and evenness.
 - * A transparent lid for easy viewing of the experiment.
 - * An alarm signals when the program ends.

Technical Parameters:

Model	BK-RC24
Capacity	24-well blood typing reagent card(Compatible with 6-column and 8-column formats)
Display	7.0-inch LCD touch display
Temp. Range	RT+5~60℃
Temp. Resolution	0.1℃
Temp. Uniformity	<±0.5℃
Temp. Stability	<±0.1℃(@37℃)
Temp. Accuracy	<±0.2℃
Timing Range	0s~99min59s
Consumption	150W
Power Supply	AC 100~240V, 50/60Hz
External Size(W*D*H)	345*285*207mm
Package Size(W*D*H)	544*339*249mm
Net Weight	6.3kg
Gross Weight	7kg

Gel Card Incubator



- Features:**
- * Transparent incubation lid for clear observation of the process.
 - * Intelligent fuzzy PID temperature control ensures minimal overshoot, faster stabilization, and higher precision compared to traditional PID.
 - * Temperature measurement and setting resolution selectable at 0.1℃ or 1.0℃.
 - * Auto-tuning function with dual-range PID control and 3-stage temperature slope correction.
 - * Audible/visual alarm (buzzer) for open/short circuit of temperature sensor; heater output automatically cuts off.
 - * Dual incubation chambers, each holding up to 12 cards simultaneously for fast, efficient processing.

Technical Parameters:

Model	BJPX-SK24
Capacity	24 cards
Display	LCD display
Temp. Range	RT+5~60℃
Temp. Resolution	0.1℃
Temp. Uniformity	≤+0.5℃
Temp. Stability	±0.2℃
Temp. Accuracy	≤±0.2℃
Heating Time	≤ 25minutes(RT to 60℃) ≤ 10minutes(RT to 37℃)
Timing Range	1~9999h or continuous operation
Consumption	200W
Power Supply	AC 110/220V, 50/60Hz
External Size(W*D*H)	290*370*145mm
Package Size(W*D*H)	425*325*200mm
Net Weight	7.5kg
Gross Weight	9.5kg

Thermo Shaker



Introduction:

It is a multipurpose thermostatic shaker controlled by brushless DC motor. Its PID intelligent temperature control technology ensures the temperature accuracy, automatically adjusts the heating rate and reduces waiting time. Heating lid independent temperature control function can effectively prevent sample evaporation and cross-infection. It is the ideal automation tool for sample incubation, catalysis, blending and preservation.

Features:

- * LCD display. It is easy to setup and use.
- * Accurate temperature control, high stability.
- * Heating lid independent temperature control function can effectively prevent sample evaporation and cross-infection.
- * Built-in fan reduces sample cooling time.
- * Optional blocks are available for common laboratory tubes and plates. Custom blocks are also available upon request.
- * Brushless DC Motor: noiseless long service life maintenance-free.
- * Automatic preheating function.
- * Auto resume to run after power failure.
- * Automatic running function.
- * Short mixing function.
- * Built-in temperature calibration function.
- * Built-in over-heating protection device, safe and reliable.

Technical Parameters:

Model	BK-MSP1000
Temp. Setting Range	0°C~105°C
Temp. Control Range	RT.+5°C~105°C
Time Range	1sec~99min59sec/1min~99h59min/∞
Temp Accuracy	≤±0.3°C
Display Accuracy	0.1°C
Temp Uniformity	≤±0.3°C
Speed Range	200~3000rpm
Orbit	2mm
Heating Time	≤10min(from 25°C to 100°C)
Fan Cooling Time	≤12min(from 100°C to 37°C)
Heating Lid Temp. Setting Range	OFF/AUTO/0°C~110°C
Heating Lid Temp. Control Range	RT.+5°C~110°C
Heating Lid Heating Time	≤10min(from 25°C to 110°C)
Heating Lid Independent Temp. Control Function	Yes
Auto Fan Function	Yes
Program Number	10programs(S0~S9)
Multi Point Running	Yes(Max 5points)
Multi Cycle	Yes(Max 99times)
Auto Heating	Yes
Auto Constant Temperature at the End of Run	Yes
Heating Lid Mode	Automatic/ Manual
Auto Running	Yes
Auto Resume to Run	Yes
Delay Timing Function	Yes
Standard Accessories	MD30/ MD31/ MD32/ MD33/MD34(Choose any one of them)
Consumption	335W
Power Supply	AC220, 50/ 60Hz; AC110, 50/ 60Hz
External Size(W*D*H)	296*212*164mm
Net Weight	6.6kg
Packing Size(W*D*H)	410*350*240mm
Gross Weight	8kg

Optional Blocks:

Type	Capacity	Max. Speed
MD30	96*0.2ml PCR Plate	2500rpm
MD31	54*0.5ml centrifuge tube	2500rpm
MD32	35*1.5ml centrifuge tube	2500rpm
MD33	35*2.0ml centrifuge tube	2500rpm
MD34	20*1.5ml+15*0.5ml	2500rpm
Without block	Elisa plate/Deep-well plate/ Tissue culture plate	3000rpm

Thermo Shaker Incubator



Features:

- * LCD display. It is easy to setup and use.
- * Reliable design with inner extra temperature protection.
- * Each thermo shaker is equipped with lifter that is easy to replace different blocks.
- * Digital accuracy and convenience.
- * Precision wells for uniform thermal transfer.
- * Assorted blocks for a wide variety of tube sizes.
- * Brushless DC Motor: noiseless long service life maintenance-free.
- * Conform to CE safety standard.
- * Accurately control and display time, temperature and speed.

Technical Parameters:

Model	BK-TSI10	Model	BK-TSI10
Temperature Setting Range	0℃~100℃	Auto Heating	Yes
Temperature Control Range	RT-20℃~100℃	Auto Resume To Run	Yes
Timing Range	1min~99h59min/∞	Power Supply	150w
Temperature Accuracy	±0.3℃	Fuse	250V 3A Φ5×20
Temperature Uniformity	±0.3℃	Heating Time	≤12min(from 25℃ to 100℃)
Shaking Speed	200rpm~1500rpm	Cooling Time	≤10min(from 100℃ to 25℃)
Orbit	3mm		≤20min(from RT to RT-20℃)
Multi Point Running	Yes (Max 5points)	Voltage	AC110~220V/50~60Hz
Multi Cycle	Yes (Max 99times)	Dimension	260*195*150mm
Auto Running	Yes	Packing Size(W*D*H)	410*320*310mm
Storage At 4℃	Yes	Gross Weight	9.5kg

Optional Blocks:

Type	Test Tube Diameter	Type	Test Tube Diameter
B30	96*0.2ml	B36	24*5ml
B31	54*0.5ml	B37	15*10ml
B32	35*1.5ml	B38	12*15ml
B33	35*2.0ml	B39	6*50ml(round-shape bottom)
B34	15*0.5ml+20*1.5ml	B39-S	6*50ml(cone-shape bottom)
B35	96*0.2ml(elisa plate)		

Introduction:

It is mainly used in small constant temperature experiments. The two functions of constant temperature and shaking which greatly reduces the experimental operation time, and can be used for the preservation of samples of various analytical instruments.



Features:

- * Transparent cover for easy observation and protection against experimental error.
- * Fast cooling speed, high stability of temperature control.
- * A variety of standard sample modules are available to choose from, easy to replace. Modules can be customized.
- * LCD display, menu-type operation interface, multiple groups of data on one screen display, easy to operate It is controlled by microprocessor to ensure superior temperature stability and uniformity.

Technical Parameters:

Model	BJPX-DBP1
Display	3.5 inch LCD touch screen
Temp Setting Range	0℃~100℃
Temp Control Range	RT-20~100℃
Temp Control Accuracy	±0.3℃
Temp Uniformity	±0.3℃
Display Accuracy	0.1℃
Timing Range	1~99h59min/∞
Speed Range	200-1500rpm
Horizontal Amplitude	2mm
Warming Time	≤12 minutes(25℃ to 100℃)
Cooling Rate 1	≤10 minutes(100℃ to 25℃)
Cooling Rate 2	≤15 minutes(cooling to 20℃ below room temperature)
Consumption	150W
Power Supply	AC100V~220V, 50/60Hz
External Size(W*D*H)	340*220*165mm
Net Weight	10kg
Packing Size(W*D*H)	431*322*296mm
Gross Weight	12kg
Test Conditions: Room temperature 25±2℃, 1.5ml*35 well module, thermometer accuracy ±0.1℃.	

Optional Blocks:

Model	Tube diameter/capacity	Maximum Number of Test Tubes	Max Speed
BP01	Φ6mm/0.2ml centrifuge tube	96	1500rpm
BP02	Φ7.6mm/0.5ml centrifuge tube	54	1500rpm
BP03	Φ10mm/1.5ml centrifuge tube	35	1500rpm
BP04	Φ10mm/2.0ml centrifuge tube	35	1500rpm
BP05	Φ13mm/5ml centrifuge tube	24	1000rpm
BP06	Φ15mm/10ml centrifuge tube	15	1000rpm

Dry Bath Incubator



Features:

- * LCD display, real-time temperature display and countdown display.
- * A variety of heating aluminum blocks can be flexibly replaced, making it more widely used and easy to clean and disinfect.
- * Automatic fault detection and alarm function.
- * Temperature deviation calibration function.

Technical Parameters:

Model	BJPX-DB1	BJPX-DB2	BJPX-DB4
Block Quantity	1	2	4
Temp. Control	PID microprocessor controller		
Temp. Range	RT+5℃-160℃		
Temp. Accuracy	±0.5℃ (at 40℃)		
Temp. Uniformity	±1.0℃ (at 40℃)		
Display Accuracy	0.1℃		
Timing Range	1~9999 mins or continuous operation.		
Heating Time	≤20 mins (30℃ to 130℃); ≤30 mins (30℃ to 160℃)		
Material	The Cover: Acrylic. External: Cold-rolled steel with anti-bacteria powder coating		
Standard Block	DB05*1pc	DB05*2pcs	DB05*4pcs
Power Supply	220VAC±10% or 110VAC±10%; 50/60Hz		
External Size (W*D*H)	310*220*190 mm	380*260*200mm	502*260*200mm
Package Size (W*D*H)	360*280*240mm	555*320*250mm	
Net/Gross Weight	3.5/5kg	8/10kg	10/12kg

Optional Blocks:

No	Tube Diameter	Max Number of Tubes	No	Tube Diameter	Max Number of Tubes
DB01	0.2ml centrifugal tube	96	DB08	φ16mm	15
DB02	φ6mm	50	DB09	φ18mm	12
DB03	0.5ml centrifugal tube	40	DB10	φ20mm	8
DB04	φ10mm	28	DB11	φ26mm	6
DB05	1.5ml centrifugal tube	28	DB12	mixed sizes 1	6*φ13mm+8*φ10mm; 10*φ6mm+1*φ25mm
DB06	2.0ml centrifugal tube	28	DB13	mixed sizes 2	14*φ11mm; 14*φ12mm
DB07	φ13mm	24	DB14	mixed sizes 3	Customized



BK-HW100D



BK-HW100



BK-HW100G


Introduction:

Dry bath incubator is a product controlled by a microcomputer and manufactured with semiconductor refrigeration technology or heating film technology. The instrument can be configured with a variety of modules, which can be widely used in sample storage, storage and reaction of various enzymes, denaturation treatment of nucleic acids and proteins, PCR reaction, pre-denaturation of electrophoresis and serum coagulation, etc.

Features:

- * Microcomputer controller, high stability and precision.
- * LCD display, simple interface. Easy to set up and use.
- * Different kinds of modules are available.
- * Over-heating protection device, safe and reliable.
- * Multi periods program control, programmable.
- * Automatic fault detection and buzzer alarm function.
- * Temperature deviation calibration function.

Optional Module BK-HW100D/100:



Optional Module BK-HW100G:



Technical Parameters:

Model	BK-HW100D	BK-HW100	BK-HW100G
Temp Setting Range	RT + 5℃~105℃	0℃~105℃	0℃~105℃
Temp Control Range	RT + 5℃~105℃	RT-20℃~105℃ (TEC)	RT-20℃~105℃ (TEC)
Time Setting Range	1 min~99h59min		
Temp Fluctuation	≤±1℃		
Module Temp Uniformity	≤±0.5℃		
Temp Control Accuracy	≤±1℃		
Temp Display Accuracy	0.1℃		
Heating Rate	≤40min (RT~100℃)	≤25min (26℃~100℃)	≤25min(26℃~100℃)
Cooling Speed	/	≤25min(from 100℃ to RT)	≤25min(from RT to RT-20℃)
		≤25min(from RT to RT-20℃)	
Temp Deviation Correction	Yes		
Program Setting	5 program periods		
Shaking Speed	/		200-1800r/min
Storage	10 programs		
Alarm	Power-on self-test, over-temperature protection, fault alarm		
Consumption	100W	150W	
Power Supply	AC220V/110V, 50/60Hz		
Standard Module	B01*1(0.5~2ml)		GB01*1(0.5~1.5ml)
External Size(W*D*H)	300*215*195mm	300*215*175mm	300*215*180mm
Net Weight	4.3kg	7kg	8.5kg
Package Size(W*D*H)	375*290*310mm		
Gross Weight	6kg	8.1kg	10.3kg

With mark(●) or no mark is round-bottom tube,with mark (▲) is sharp-bottom tube.

Dry Bath Incubator

Application:

DBI-3 is microprocessor controlled Dry Bath Incubator. Instead of traditional water bath device, the heat-conducting medium is high purity aluminum. The exact desired temperature is easily set using the arrow keys on the sloped control panel while values are shown on the large digital display. No checking of a thermometer and readjusting temperature is necessary. The user calibration feature allows for easy calibration to in house standards when required. This product can be widely used in preservation and reaction of samples, DNA amplification, electrophoresis denaturation and serum solidification, etc.



Features:

- * LCD display.
- * Automatic fault detection and buzzer alarm function.
- * Electronic calibration. User can reset to any local standard.
- * Easy replacement and cleaning of block.
- * Built-in over-temperature protection.
- * Customized modules are accepted.

Technical Parameters:

Model	DBI-3	Model	DBI-3
Temp Setting Range	0°C~100°C	Auto Heating	Yes
Temp Control Range	RT+5°C~100°C	Auto Resume To Run	Yes
Time Range	1min ~ 99h59min/∞	Capacity	See optional block
Temp Accuracy	≤±0.3°C	Power	150W
Display Accuracy	0.1°C	Power Supply	220V, 50/60Hz;110V, 60Hz
Temp Uniformity	≤±0.3°C	Fuse	250V 3A Φ5*20
Heating Time	≤12min(from 25°C to 100°C)	Product Size (W*D*H)	260*195*150mm
Multi Points Running	Yes (Max 5 points)	Weight	2.5Kg
Multi Cycle	Yes (Max 99 times)	Package Size(W*D*H)	410*320*310mm
Auto Running	Yes	Gross Weigh	3.5kg

Optional Blocks:

Type	Description	Type	Description
B30	96*0.2ml PCR plate	B36	24*5ml centrifuge tube
B31	54*0.5ml centrifuge tube	B37	15*10ml centrifuge tube
B32	35*1.5ml centrifuge tube	B38	12*15ml centrifuge tube
B33	35*2.0ml centrifuge tube	B39	6*50ml centrifuge tube(round-shape bottom)
B34	20*1.5ml+15*0.5ml	B39-S	6*50ml centrifuge tube(cone-shape bottom)
B35	96*0.2ml elisa plate	Choose one as a standard block.	

Application:

DBI-10C is microprocessor controlled Dry Bath Incubator. Instead of traditional water bath device, the heat-conducting medium is high purity aluminum. The exact desired temperature is easily set using the arrow keys on the sloped control panel while values are shown on the large digital display. No checking of a thermometer and readjusting temperature is necessary. The user calibration feature allows for easy calibration to in house standards when required. This product can be widely used in preservation and reaction of samples, DNA amplification, electrophoresis denaturation and serum solidification, etc.



Features:

- * Energy-efficient Peltier design.
- * Automatic fault detection and buzzer alarm function.
- * Electronic calibration. User can reset to any local standard.
- * Small, compact size uses very little bench space.
- * Easy replacement, cleaning and disinfecting of metal blocks.
- * Built-in over-temperature protection.
- * Customized modules are accepted.
- * Buzzer alarm when temperature control ends.

Technical Parameters:

Model	DBI-10C	Multi Cycle	Yes (Max 99 times)
Temp Setting Range	-10°C~100°C	Auto Running	Yes
Temp Control Range	RT- 30°C~100°C	Auto Heating	Yes
Time Range	1min ~ 99h59min/∞	Auto Resume To Run	Yes
Temp Accuracy	≤±0.3°C	Capacity	See optional block
Display Accuracy	0.1°C	Power	150W
Temp Uniformity	≤±0.3°C	Power Supply	AC100~240V, 50/60Hz
Heating Time	≤12min(from 25°C to 100°C)	Fuse	250V 3A Φ5*20
Cooling Time	≤10min(from 100°C to 25°C)	Product Size (W*D*H)	260*195*150mm
Cooling Time	≤25min(from RT to RT-30°C)	Weight	4.5kg
Storage At 4°C	Yes	Package Size(W*D*H)	410*320*310mm
Multi Points Running	Yes (Max 5 points)	Gross Weight	5.5kg

Optional Blocks:

Type	Description	Type	Description
B30	96*0.2ml PCR plate	B36	24*5ml centrifuge tube
B31	54*0.5ml centrifuge tube	B37	15*10ml centrifuge tube
B32	35*1.5ml centrifuge tube	B38	12*15ml centrifuge tube
B33	35*2.0ml centrifuge tube	B39	6*50ml centrifuge tube(round-shape bottom)
B34	20*1.5ml+15*0.5ml centrifuge tube	B39-S	6*50ml centrifuge tube(cone-shape bottom)
B35	96*0.2ml elisa plate	Choose one as a standard block.	

Dry Bath Incubator

Application:

The product is controlled by microcomputer, use high purity aluminum material as a heat conduction medium instead of the conditional water bath device, which is easy to use, wide temperature range, high precision and etc. It can be widely used in the sample preservation, reaction of DNA amplification, electrophoresis, degeneration, solidification and other kinds of serum biochemical sample thermostatic incubation process.




DBI-1001



DBI-1002

Features:

- * Real-time temperature display, the countdown display.
- * Convenient block replacement, easy to clean and disinfect.
- * Automatic fault detection and alarm function.
- * Built-in over temperature protection device.
- * Temperature deviation calibration function.

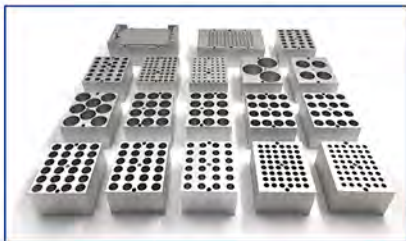

Technical Parameters:

Model	DBI-1001	DBI-1002
Temperature Range	RT.+5°C~160°C	RT.+5°C~160°C
Temp Accuracy	±0.5°C(@40°C)	
Temp Accuracy	±1°C(@120°C)	
Temp Uniformity	±0.5°C	
Display Accuracy	0.1°C	
Time Range	1-99h59min/∞	
Heating Time	≤15min(from 25°C to 160°C)	≤15min(from 25°C to 160°C)
Block Quantity	1	2
Max Power	300W	500W
Voltage	AC220V or AC110V, 50/60Hz	
Size	260*220*100mm	260*220*100mm
Weight	5.0kg	5.5Kg
Package Size	360*310*230mm	
Gross Weight	6kg	

Optional Blocks:

Model	Tube Diameter	Tube Quantity	Model	Tube Diameter	Tube Quantity
B01	6mm	48	B10	26mm	8
B02	7mm	48	B11	28mm	4
B03	10mm	24	B12	40mm	3
B04	12mm	24	B13	0.2ml centrifuge tube	48
B05	13mm	24	B14	0.5ml centrifuge tube	48
B06	15mm	16	B15	1.5ml centrifuge tube	24
B07	16mm	16	B16	2.0ml centrifuge tube	24
B08	19mm	12	B17*	0.2ml PCR plate	96
B09	20mm	12	B18*	0.2ml Elisa plate	96

B17/B18 block is only used for DBI-1002

Application:

DBI-M is a microprocessor-controlled product. It is widely used in preservation and reactions of sample, DNA amplification and initial denaturation of electrophoresis and so forth. It fits almost anywhere and can even be used in cars, boats or wherever a 24 volt power source is available.



Features:

- * Energy-efficient design.
- * Applicable to 24V / 12V power adapter.
- * Accurate to ± 0.3°C.
- * Process of experiment is visible.
- * Electronic calibration. User can reset to any local standard.
- * Custom blocks made to fit any sample holder.

Technical Parameters:

Model	DBI-M
Temp. Range	RT+5°C~100°C
Timing Range	1min~99h
Temp. Accuracy	≤±0.3°C
Display Accuracy	0.1°C
Temp. Stability	±0.3°C
Heating Time	≤20min(from 40°C to 100°C)
Voltage	DC24V/1.67A
Power	40W
Dimensions	145*113*110mm
Weight	0.5kg
Package Size	280*240*210mm
Gross Weight	1.7kg

Optional Blocks:

Type	Description
Mini A	15*2.0ml
Mini B	15*1.5ml
Mini C	24*0.5ml
Mini D	32*0.2ml

Choose one as a standard block.

Sample Concentrator

Features:

- * High precision and wide range of temp control.
- * Blowing a large number of samples at one time.
- * Blowing each sample independently.
- * Amount of airflow can be adjusted.
- * Easy operation; safe and reliable to use.
- * 12-month warranty.



Technical Parameters:

Model	BK-SC100
Temp. Control Range	RT.+5℃-160℃
Temp. Uniformity	±0.5℃
Display Accuracy	0.1℃
Heating Time	≤15min (from 25℃ to 160℃)
Max Gas Usage	15L/min
Max Gas Pressure	0.02Mpa(Gas pin≤16pcs); 0.05Mpa (Gas pin>16pcs)
Max Power	300W
Dimension	260*220*450mm
Temp. Accuracy	±0.5℃ (@40℃)
Temp. Accuracy	±1℃ (@120℃)
Timing Range	1-99h59min/∞
Max Vertical Travel	200mm
Needle Length	150mm
Block Quantity	1
Voltage	220V, 50/60Hz; 110V, 60Hz
Packing Size(W*D*H)	430*420*340mm
Weight(kg)	7.0
Gross Weight(kg)	9.0

Optional Blocks:

Type	Test Tube Diameter	Capacity
B03	10mm	24
B04	12mm	24
B05	13mm	24
B06	15mm	16
B07	16mm	16
B08	19mm	12
B09	20mm	12
B10	26mm	8
B11	28mm	4
B12	40mm	3
B15	1.5ml(centrifuge tube)	24
B16	2.0ml(centrifuge tube)	24
Choose one as a standard block.		

Sample Concentrator(visible)

Features:

- * High precision and wide range of temp control.
- * Blowing a large number of samples at one time.
- * Blowing each sample independently.
- * Amount of airflow can be adjusted.
- * With special slotting-design block, surface location of.
- * Concentrated samples can be observed.
- * Easy operation; safe and reliable to use.



Technical Parameters:

Model	BK-SC400
Temp. Control Range	RT.+5℃-160℃
Temp. Uniformity	±0.5℃
Display Accuracy	0.1℃
Heating Time	≤15min (from 25℃ to 160℃)
Nitrogen Flow Rate	15L/min
Nitrogen Rressure	0.1Mpa
Max Power	500W
Dimension	260*220*475mm
Temp. Accuracy	±0.5℃ (@40℃)
Temp. Accuracy	±1℃ (@120℃)
Timing Range	1min-99h59min/∞
Needle Length	150mm
Block Quantity	1
Voltage	220V, 50/60Hz;110V, 60Hz
Packing Size(W*D*H)	430*420*340mm
Weight(kg)	7.3
Gross Weight(kg)	10.0

Optional Blocks:

Type	Diameter	Depth	Capacity
B02 027 001	10.5mm	50mm	12
B02 027 002	12.5mm	50mm	12
B02 027 003	13.5mm	50mm	12
B02 027 004	15.5mm	50mm	12
B02 027 005	16.5mm	50mm	12
B02 027 006	19.5mm	50mm	12
B02 027 007	20.5mm	50mm	12
Choose one as a standard block.			

Ultrasonic Cell Disruptor

Application:

Widely used in the field such as biology, chemistry, microbiology, pharmacology, physics, zoology, agronomy, medical science, pharmacy for teaching, scientific research and production.

Features:

- * LCD touch screen display.
- * Storage capacity: 20 groups of program data.
- * Temp. monitor: over-temperature protection.
- * Other functions: automatic tracking the frequency, fault alarm.



Technical Parameters:

Model	UCD -150	UCD -250	UCD -500	UCD -650	UCD -950	UCD -1200	UCD -1500	UCD -1800	UCD -2000
Frequency(KHz)	20~25	20~25	20~25	20~25	20~25	19.5~20.5	19.5~20.5	19.5~20.5	19.5~20.5
Crushing Capacity(ml)	0.1~150	0.1~300	0.1~400	0.1~500	0.1~700	1~1000	10~1200	1~1200	50~2000
Standard Amplitude-change Pole Ø (mm)	6					20	22	22	25
Optional Amplitude-change Pole Ø(mm)	2, 3, 6, 8,10	2, 3, 6, 8, 10	2, 3, 6, 8, 10, 12	2, 3, 6, 8, 10, 12	2, 3, 6, 8, 10, 12, 15	3, 6, 8,10, 15, 22, 25	3, 6, 8, 10, 15, 20, 22, 25	3, 6, 8, 10, 15, 20, 22, 25	6, 8, 10, 15, 20, 22, 25
Ultrasonic Power (W1-100%)	1.5~150	2.5~250	5~500	6.5~650	10~1000	12~1200	15~1500	18~1800	20~2000
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional)								
Package Size (W*D*H)	350*350*550mm(Acoustic chamber) 470*305*430mm(Main body)								
Gross Weight	26kg					29kg			

Technical Parameter for Amplitude Pole:

Size	Crushing Capacity(ml)	Recommended power ratio	Frequency (KHz)	UCD -150	UCD -250	UCD -500	UCD -650	UCD -950	UCD -1000	UCD -1200	UCD -1500	UCD -1800	UCD -2000
φ2mm	0.1-5ml	1~35%	20~25	√	√	√	√	√	√	×	×	×	×
φ3mm	3-10ml	1~45%	20~25	√	√	√	√	√	√	√	√	√	×
φ5mm	5-100ml	1~60%	20~25	×	×	×	×	×	×	×	×	×	×
φ6mm	10-100ml	1~70%	20~25	√	√	√	√	√	√	√	√	√	√
φ8mm	20-200ml	1~85%	20~25	√	√	√	√	√	√	√	√	√	√
φ10mm	30-300ml	1~90%	20~25	√	√	√	√	√	√	×	×	×	×
φ10mm	30-300ml	1~60%	19.5~20.5	×	×	×	×	×	×	√	√	√	√
φ12mm	50-600ml	10~90%	20~25	×	×	√	√	√	√	×	×	×	×
φ15mm	200-750ml	10~95%	20~25	×	×	×	×	√	√	×	×	×	×
φ15mm	50-500ml	5~80%	19.5~20.5	×	×	×	×	×	×	√	√	√	√
φ20mm	100-1000ml	10~90%	19.5~20.5	×	×	×	×	×	×	√	√	√	√
φ22mm	200-1200ml	20~95%	19.5~20.5	×	×	×	×	×	×	√	√	√	√
φ25mm	300-1500ml	30~95%	19.5~20.5	×	×	×	×	×	×	√	√	√	√

Continuous Flow Ultrasonic Cell Disruptor

Application:

It is suitable for the extraction of Chinese herbal medicine, cells, bacteria and emulsifying chemical nanometer material, suitable for small batch production or to provide accurate technical parameters for the future industrial production.

Features:

- * . LCD Display.
- * . Automatic tracking the frequency.
- * . Storage capacity: 20 groups of program data.
- * . It can test and control temperature of the sample.
- * . Function of automatic feeding and computer control can be optional equipped.



Technical Parameters:

Model	UCD-4000W-II
Frequency	19.5~20.5KHz
Standard Amplitude-change PoleΦ	Φ40*250mm or φ40*370mm
Crushing Capacity/Once	500~10000ml
Crushing Capacity/Continuously	100L/Day
Ultrasonic Power(W)	1000~4000W, adjustable
Time Set	Optional: continuous/pulse
Max. Working Time	99h59min59sec
Safety System	Over temperature; Time; Overload;No load
Standard Accessories	Main machine, energy converter, standard amplitude, sound proof box(or supporting frame)
Optional Accessories	Stainless steel reactor, peristaltic pump, low temperature water tank
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional)
Package Size(W*D*H)	675*305*450mm(Main body); 430*415*730mm(Soundproof box)
Gross Weight	32kg

Portable Ultrasonic Cell Disruptor

Features:

- * LCD Display
- * Temperature alarm setting range: 0~100℃
- * Ultrasonic time setting for on and off: 0.1-9.9s
- * Audible alarm for: Over temperature, over power, over time



Technical Parameters:

Model	UCD-P01
Frequency(KHz)	20~30, frequency automatic tracking
Crushing Capacity(ml)	0.1~150ml(need to choose the corresponding horn)
Standard Amplitude Pole Φ(mm)	3 or 5
Optional Amplitude Pole Φ(mm)	2, 3, 5, 6
Standard Accessories	Bracket
Optional Accessories	Foot switch, sound proof box
Ultrasonic Power(W)	2.5~250W, adjustable
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional)
Package Size(W*D*H)	470*305*450mm
Gross Weight	14kg

Disintegrator

Plant Disintegrator



- Features:**
- * Grind by the action of rotating disk and fixed disk; the ideal equipment for grinding oiliness and fiber products.
 - * Featured by lightweight, small volume, compact structure, continuous working time, attractive appearance and high efficiency. Space between blades is adjustable according to material fineness.

Technical Parameters:

Model	MPD-102
Mesh Size (mm)	0.5/1/1.5
Working Time	Continuous
Grinding (Mesh)	60~120
Speed (rpm)	1400rpm
Consumption	180W
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional)
External Size(W*D*H)	270*180*280mm
Package Size(W*D*H)	350*230*300mm
Net Weight	11kg
Gross Weight	11.4kg

High-speed Universal Disintegrator



HSD-80



HSD-100/200



HSD-400A

Technical Parameters:

Model	HSD-80	HSD-100	HSD-200	HSD-400A
Speed(rpm)	10000	26000	26000	26000
Size of Grinding Room(mm)	Ø80*40	Ø100*40	Ø125*56	Ø150*80
Grinding(mesh)	40~200			
Input Quantity(≤g/time)	50	100	200	400
Consumption	200W	800W	800W	1000W
Power Supply	AC220V, 50/60Hz			
External Size(W*D*H)	Ø110*210H	Ø160*320H	Ø160*360H	230*190*420mm
Net Weight	1.4kg	3kg	3kg	9.3kg
Packing Size(W*D*H)	260*190*185mm	220*210*400mm	220*210*430mm	290*240*470mm
Gross Weight	1.7kg	3.5kg	3.5kg	10kg

Ball Mill
Vertical Planetary Ball Mill(Semi-circle Type)

Application:

Planetary Ball Mill has four ball grinding tanks installed on one turntable. When the turntable rotates, the tank axis makes planetary movements, the balls and samples inside the tanks are impacted strongly in high speed movement, and samples are eventually ground into powder. Various kinds of different materials can be ground by the mill with dry or wet method. Minimum granularity of ground powder can be as small as 0.1μm.



Features:

- * 3D curve shape design.
- * Special gear with low noise.



Visual Window



Planetary Mechanism



Frequency Converter Control



Hole of Cooling Fan

Technical Parameters:

Model		BKBM-V0.4	BKBM-V2
Capacity		0.4L	2L
Volume of Each Capacity		50~100ml	50~500ml
Pot Quantity		4 pcs	
Running Time Range		1~9999min	
Reciprocal Running Time		1~999min	
Adjustable Speed	Revolution	45~435rpm	35~335rpm
	Rotation	90~870rpm	70~670rpm
Noise		58±5dB	60±5dB
Speed Control Mode		Frequency Control	
Transmission Mode		Gear Drive	
Working Mode		2 or 4 pots can be used each time	
Maximum Sample Volume (material + grinding ball)		2/3 of the volume of the ball mill tank	
Feed Size		Soft and Crispy material<10mm, Other materials<3mm	
Out-put Granularity		Minimum Granularity can be reached to 0.1um	
Adjusting Mode of Rotate Speed		Frequency converter with stepless speed regulation	
Consumption		0.25KW	0.75KW
Power Supply		AC110/220V±10%, 50/60Hz	
External Size(W*D*H)mm		530*300*340	750*470*565
Package Size(W*D*H)mm		595*360*485	820*530*720
Net Weight(kg)		29	80
Gross Weight(kg)		50	100
Note: Both pot and ball are optional. For a ball mill with a capacity of 2L, if the matching mill pot specification is 25ml or 50ml, you need to purchase a base holder separately.			

Vertical Planetary Ball Mill(Square Type)



Features:

- * 3D curve shape design.
- * Special gear with low noise.



Planetary Mechanism



Frequency Converter Control



Hole of Cooling Fan



Pneumatic Rod

Technical Parameters:

Model		BKBM-V2S
Capacity		2L
Volume of Each Capacity		50~500ml
Pot Quantity		4pcs
Running Time Range		1~9999min
Reciprocal Running Time		1~999min
Adjustable Speed	Revolution	35~335rpm
	Rotation	70~670rpm
Noise		60±5dB
Speed Control Mode		Frequency Control
Transmission Mode		Gear Drive
Working Mode		2 or 4 pots can be used each time
Maximum Sample Volume (material + grinding ball)		2/3 of the volume of the ball mill tank
Feed Size		Soft and Crispy material<10mm, Other materials<3mm
Out-put Granularity		Minimum Granularity can be reached to 0.1um
Adjusting Mode of Rotate Speed		Frequency converter with stepless speed regulation
Consumption		0.75KW
Power Supply		AC110/220V±10%, 50/60Hz
External Size(W*D*H)mm		770*470*570
Package Size(W*D*H)mm		820*540*680
Net Weight(kg)		93
Gross Weight(kg)		113
Note: Both pot and ball are optional. For a ball mill with a capacity of 2L, if the matching mill pot specification is 25ml or 50ml, you need to purchase a base holder separately.		

Horizontal Planetary Ball Mill



BKBM-H2A



BKBM-H2B

Features:

- * Horizontal structure of grinding pots.
- * Special gear with low noise.

Technical Parameters:

Model		BKBM-H2A	BKBM-H2B
Capacity		2L	
Volume of Each Capacity		50~500ml	
Pot Quantity		4 pcs	
Running Time Range		1~9999min	
Reciprocal Running Time		1~999min	
Adjustable Speed Revolution	Revolution	35~335rpm	
	Rotation	70~670rpm	
Noise		60±5dB	
Transmission Mode		Gear Drive	
Working Mode		2 or 4 pots can be used each time	
Maximum Sample Volume (material+grinding ball)		2/3 of the volume of the ball mill tank	
Feed Size		Soft and Crispy material<10mm, Other materials<3mm	
Out-put Granularity		Minimum Granularity can be reached to 100nm	
Adjusting Mode of Rotate Speed		Frequency converter with stepless speed regulation	
Speed Control Mode		Frequency Control	
Consumption		0.75KW	1.5KW
Power Supply		Standard: AC220V, 50/60Hz, optional: AC110V, 50/60Hz	
External Size(W*D*H)mm		700*510*570	1220*620*810
Package Size(W*D*H)mm		850*750*700	1400*800*1000
Net Weight(kg)		86	256
Gross Weight(kg)		150	400
Note: Both pot and ball are optional. For a ball mill with a capacity of 2L, if the matching mill pot specification is 25ml or 50ml, you need to purchase a base holder separately.			

Grinding Machine
Grinding Machine



BK-24S/48S



BK-96S



BK-96LS



BK-96LDS

Application:

It is widely used in biochemistry, microbiology, pharmaceutical chemistry, surface chemistry, physical chemistry, zoology and other fields.

The types of samples processed include plant tissues (such as rice, corn, wheat, beans, peanuts), animal tissues (such as small intestine, heart, lung, fur, etc.), cells, bacteria, yeast, and various medicinal tissues, etc.

Features:

- * The all-metal body improves the stability and safety of the whole machine.
- * The safety lock of the working chamber ensures the safety of samples and laboratory.
- * There is no cross-contamination, and the sample tube is fully enclosed during the crushing process.
- * Good repeatability. The same procedure can be set for the same tissue sample to obtain the same grinding effect.
- * A large number of simultaneous operations can be performed, and the effect is good.

Technical Parameters:

Model	BK-24S	BK-48S	BK-96S	BK-96LS	BK-96LDS
Standard Capacity	24*2ml PE adaptor, 1pc	48*2ml PE adaptor, 1pc	96*2ml PE adaptor, 1pc		
Refrigerating Function	No			Yes, 0 to -50℃	Yes, 20 to -50℃
Display Mode	Touch screen display				5 inches OLED touch screen display
Discharging Granularity	~5μm				
Acceptable Number of Grinding Tubes	>2pcs				
Frequency	0~70Hz				
Time Setting	0s~99min				
Grinding Ball Material and Size	Alloy steel, chromium steel, zirconia, tungsten carbide, quartz sand; 0.1~30mm				
Noise Level	<55dB				
Grinding Method	Wet grinding, dry grinding and low temperature grinding are all available				
Power Supply	AC220V, 50/60Hz(Standard);AC110V, 60Hz(Optional)				
Optional Parts	1. Adaptor: Common type: 0.2ml*96;2.0ml*24; 5.0ml*12; 15ml*8; 25ml*4; 50ml*2; 5.0ml*24; 2.0ml*48 etc. Refrigerating type (can get -196℃): 2.0ml*24; 5.0ml*12; 15ml*8; 25ml*2; 50ml*2; etc. 2. 2~100ml refrigerating grinding tube. They can also be customized.				
Packing Size(W*D*H)	480*350*510mm	530*400*560mm	570*490*680mm	850*590*560mm	550*550*950mm
Gross Weight	25kg	39kg	52kg	74kg	95kg

Tissue Grinding Machine



Introduction:

Tissue Grinding Machine can extract and purify original DNA, RNA, and proteins from any source, including soil, plant and animal tissues/organs, bacteria, yeast, fungi, spores, paleontological specimens, etc. It completes the grinding, crushing, mixing, and cell wall disruption of samples in a very short time.

Features:

- * In standard mode, both BHY1 and BHY2 can process up to 24 samples in as little as 1 minute.
- * The grinding process is fully enclosed, with samples moving independently to avoid cross-contamination.
- * BHY2 has been upgraded to a dual-slide vertical oscillation mechanism, providing more thorough grinding, better stability, and a longer lifespan. BHY1 features a wear-resistant graphite bush structure.
- * Supports placing centrifuge tubes directly into the adaptor, supports pre-freezing of centrifuge tubes.
- * Adopt for quiet operation to reduce interference with the surrounding environment.

Applicable Samples:

- * Animal tissues: brain, heart, lungs, stomach, liver, thymus, kidneys, intestines, lymph nodes, muscles, bones, hair, etc.
- * Volatile samples: coal, oil shale, wax products, etc.
- * Plant tissues: roots, stems, leaves, flowers, fruits, seeds, etc.
- * Microorganisms: yeast, E. coli, etc.
- * Food and pharmaceuticals: various foods, tablets, etc.
- * Plastics, polymers: PE, PS, textiles, resins, etc.
- * Environmental samples: soil, sediment, sludge, feces, etc.

Adaptor:

Model	Standard	Optional	
BHY1	 24*2ml	 32*2ml	 16*5ml
BHY2	 24*2ml	 96*2ml	 48*2ml
		 32*2ml	 16*5ml
		 2*50ml	 2*25ml
		 2*15ml	 8*10ml
Not suitable for low temperature grinding: 96*2ml/48*2ml			

Note: BHY1 and BHY2 adapters are not interchangeable.

Technical Parameters:

Model	BHY1	BHY2
Display	5-inch OLED touch screen	7-inch OLED touch screen
Oscillation Mode	Up and down vertical oscillation	
Grinding Speed	500~2300rpm	
Grinding Way	Dry grinding/wet grinding/low temperature grinding	
Grinding Time	Each segment 0~120s, can be set in multiple segments	
Programming	Multi-stage operation setup is available, automatically records the parameters of the last operation	
Safety Lock	Mechanical butterfly safety lock + door-controlled electronic operation limit	
Adaptor	Aluminum alloy material Standard: 24*2ml Optional(Can customize): 32*2ml/16*5ml	Aluminum alloy material Standard: 24*2ml Optional(Can customize): 96*2ml/48*2ml/32*2ml/16*5ml/8*10ml/2*15ml/2*25ml/2*50ml Not suitable for low temperature grinding: 96*2ml/48*2ml
Grinding Ball	Standard stainless steel grinding ball: φ3mm*800 and φ5mm*200	Standard stainless steel grinding ball: φ3mm*800 and φ5mm*200
Consumption	120W	180W
Power Supply	AC 110~220V, 50/60Hz	
External Size(W*D*H)	265*400*480mm	265*405*510mm
Package Size(W*D*H)	375*530*640mm	375*530*670mm
Net Weight	28.5kg	29kg
Gross Weight	41kg	

- Note: 1. Low temperature grinding means that the some adapter can be placed in a low temperature refrigerator or liquid nitrogen container to take out and then use, rather than the instrument with its own freezing function.
2. If you purchase 2*50ml adapters, a set of grinding balls will be included as standard: φ8mm*40, φ10mm*40, φ12mm*20 and φ14mm*20.

Homogenizer

Homogenizer



Application:

Homogenizer is widely used in homogenization treatment of animal tissues and biological samples. It can be used in food, drug, cosmetics, clinical, molecular, toxin and bacterial detection fields, especially for the preparation of microbial test samples.

Features:

- * 4.3 inch LCD touch screen display and microcomputer control.
- * Intelligent program control, able to set the flapping time, speed, etc.
- * Adjustable flapping spacing, easy to process samples with different amount.
- * Disposable sterile bag guarantees hygiene and safety.
- * Toughened glass window, easy to observe.
- * With anti-pinch function and pause function.

Technical Parameters:

Model	BFH-01	BFH-02
Flapping Time	0.1s~99min59s or continuous operation	
Flapping Speed	3~12 times/s	
Flapping Spacing	0~50mm adjustable	
Effective Capacity	3~400ml	
Program Setting and Storage	10-segment combination programming	
Temp. Control Range	/	RT-60°C
Disinfection Function	UV lamp disinfection, disinfection wavelength 253.7nm	
Sterile Bag	17*30cm, standard 100pcs	
Anti Pinch Function	With automatic stop anti pinch function	
Start Mode	Soft start	
Consumption	200W	500W
Power Supply	AC220V±10%, 50/60Hz(Standard); AC110V±10%, 50/60Hz(Optional)	
External Size(W*D*H)	420*230*330mm	
Package Size(W*D*H)	540*310*410mm	
Net Weight	21kg	22kg
Gross Weight	24kg	25kg



Introduction:

It is primarily used for the efficient homogenization and emulsification of two immiscible liquids, as well as the extraction of trace organic compounds, lipids, and organic solvent-soluble substances in water. It is widely used as a laboratory instrument in universities, environmental protection, health and epidemic prevention, chemical industry, water supply, and medical units.

Features:

- * Operational mode allows for continuous operation for approximately 15 minutes.
- * Equipped with a DC motor, which offers excellent performance, high speed, low heat generation, long lifespan, and lower energy consumption.
- * Capable of homogenizing and mixing tissues of various animals and plants.
- * Able to rupture cell membranes and separate them, as well as break DNA strands into small molecules at different speeds.
- * Digital speed display for intuitive reading.

Technical Parameters:

Model	D-200	
Item No.	8034121202	8034121203
Speed Range	2000~20000rpm	
Processing Volume	20~1200mL	
Adjustment Method	Knob infinitely variable speed control	
Maximum Viscosity	5000mpas	
Blade	Set 1: Small Capacity Blade	Set 2: Large Capacity Blade
Material of Contact Substance	Stainless steel and PTFE	
Protection Type	IP20	
Consumption	200W	
Power Supply	AC110~120V, 60Hz or AC220~240V, 50~60Hz	
External Size(Including Bracket)(L*W*H)	360*320*600mm	
Net Weight	4kg	
Packing Size(L*W*H)	480*330*165mm	
Gross Weight	6kg	

Optional Accessories:

Type	Item No.	Diameter	Length	Processing Capacity
Set 1: Small Capacity Blade	18901287	12mm	15cm	20~1000mL
Set 2: Large Capacity Blade	18901288	18mm	16cm	20~1200mL

Homogenizer




Application:

D-160 can be used in bio-pharmaceuticals, genetic research, tissue destruction, fragmentation, cytoplasmization, pathological analysis, nano-material dispersion, polymerization, ink coatings, fine chemicals, pesticides, prospecting, environmental protection, energy and other fields.

Features:

- * Lightweight design, handheld and can be operated with one hand.
- * The application of different dispersing heads is suitable for liquid samples of 0.1~250ml.
- * High-quality 316L stainless steel dispersing head, corrosion-resistant, high-temperature sterilization.
- * The dispersing head is easy to disassemble and clean; high-speed and high-efficiency motor.
- * The speed is adjustable in 10 gears, and the speed range: 8000~32000rpm.

Components of Dispersing Shaft:

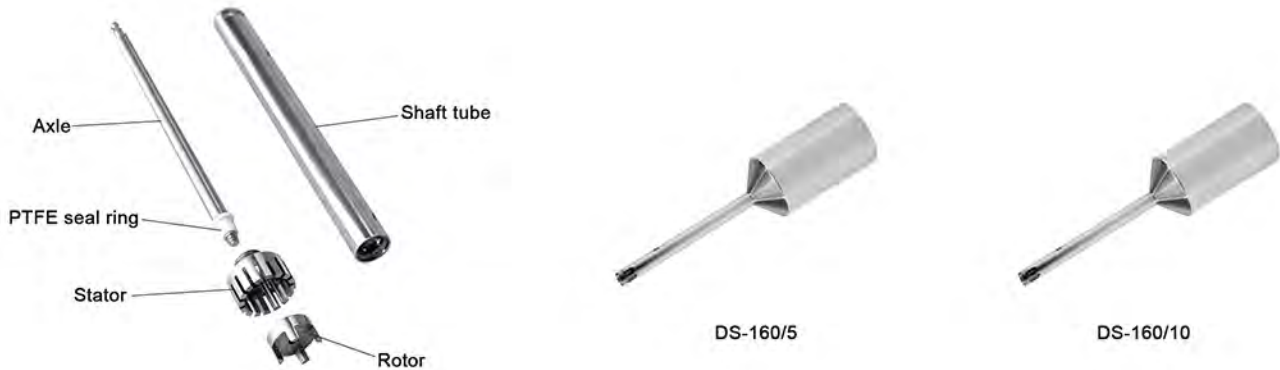

Technical Parameters:

Model	D-160/5	D-160/10
Item No.	8014111000	8014121000
Recommended Configuration	D160 drive, H370 Stand, DS-160/5 shaft, volumes from 0.1~50ml	D160 drive, H370 Stand, DS-160/10 shaft, volumes from 1~250ml
Speed Range	8000~32000rpm	
Max. Circum. Speed	6.3~14m/s	
Speed Control	10 stage	
Working Volume(H ₂ O)	0.1~50ml(Dispersing shaft DS-160/5)	1~250ml(Dispersing shaft DS-160/10)
Max. Viscosity	5000mPa·s	
Material of Dispersing Shaft	SS316 & PTFE seal ring	
Noise	≤72dB	
Ambient Temp.	0~40℃	
Relative Humidity	85%RH	
Protection Type	IP20	
Consumption	160W	
Motor Type	AC carbon brush motor	
Power Supply	AC110/220V±10%, 50/60Hz(Customizable)	
Standard Accessory	Base stand+DS-160/5 dispersing shaft	Base stand+DS-160/10 dispersing shaft
External Size(W*D*H)	45*55*190mm	
Package Size (W*D*H)	470*240*250mm	
Gross Weight	4kg	

Accessories Description:

Cat. No.	Combination Stator + Rotor	Model	Working Volume (ml)	Diameter of Stator	Diameter of Rotor	Min. / Max. Immersion Depth	Application
18900543	DS-160/5	D-160 /5	0.1~50	5mm	3mm	7/50mm	Small amounts of solid-liquid mixtures
18900544	DS-160/10	D-160 /10	1~250	10mm	6mm	10/120mm	

Homogenizer

Introduction:

Homogenizer can be used in bio-pharmaceuticals, genetic research, tissue destruction,ragmentation, cytoplasmization, pathological analysis, nano-material dispersion, polymerization, ink coatings, fine chemicals, pesticides, prospecting, environmental protection, energy and other fields.

Features:

- * Lightweight design, handheld and can be operated with one hand.
- * The application of different dispersing heads is suitable for liquid samples of 0.2~30000ml.
- * High-quality 316L stainless steel dispersing head, corrosion-resistant, high-temperature sterilization.
- * The dispersing head is easy to disassemble and clean; high-speed and high-efficiency motor.

Technical Parameters:

Model	BH-50P
Speed Range	7000~30000rpm
Processing Volume	0.2~40000ml
Standard Accessories	Work stand, standard work head(18G/18F/20G/20F/25G/25F/30G/30F choose any one)
Consumption	1300W
Power Supply	AC220V±10%, 50/60Hz(Standard); AC110V±10%, 50/60Hz(Optional)
External Size(W*D*H)	320*210*680mm
Package Size(W*D*H)	650*360*180mm
Net/Gross Weight	9.5kg/10kg

Optional Working Head:

Model	Processing Volume	Applicable Viscosity
6G	0.2~10ml	<100CP
8G	10~60ml	<100CP
10G	30~150ml	<200CP Vacuum Blade Head
18G	30~1500ml	<5000CP
18F	30~1500ml	<5000CP
20F	50~3000ml	<5000CP Vacuum Blade Head
25G	100~7000ml	<8000CP
25F	100~7000ml	<8000CP
25T	100~5000ml	<8000CP Vacuum Blade Head
20DG	50~3000ml	<5000CP Vacuum Blade Head
20DF	50~3000ml	<3000CP Vacuum Blade Head
25DG	100~5000ml	<5000CP Vacuum Blade Head
25DF	100~5000ml	<3000CP Vacuum Blade Head
25J-Q	200~10000ml	<10000CP Vacuum Blade Head
30G	1000~40000ml	<10000CP
30F	200~10000ml	<10000CP
30DG	150~10000ml	<10000CP Vacuum Blade Head
30DF	150~10000ml	<10000CP Vacuum Blade Head
30J-Q	1000~40000ml	<10000CP
30J-X	1000~40000ml	<10000CP



Handheld High-Speed Homogenizer

Introduction:

BK-H6B type is suitable for mixing, emulsification and homogenization of liquid and liquid; dispersion of liquid and solid powder; It can be used in pharmaceutical, biochemical, food, nanomaterials, coatings, adhesives, daily chemicals, printing and dyeing, petrochemicals, papermaking chemistry, polyurethane, inorganic salts, asphalt, silicone, pesticides, water treatment, heavy oil emulsification, Diesel emulsification, electronics, batteries and other industries are also ideal products for factories, scientific research institutions, colleges and universities, medical units, etc. for scientific research, product development, quality control and application in the production process.

Feature:

- * One-handed control, user-friendly operation, super power, better experimental effect.
- * Double insulation protection to ensure safety.
- * All parts of the working head contacting the material are made of high-quality stainless steel, with good corrosion resistance.
- * The working head is connected with the drive motor by a coupling, which is easy and flexible to disassemble.
- * Stepless speed controller, convenient speed regulation and stable operation.

Technical Parameters:

Model	BK-H6B
Speed Range	1000-32000r/min
Working Volume	0.2-150ml(H ₂ O)
Standard Dispersing Shaft	10G
Max. Viscosity	2000mpas
Consumption	120W
Speed Control	6 stage
Material Of Dispersing Shaft	SS316L & PTFE
Process Type	Micro batch processing
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional)
Relative Humidity	80%
Standard Stand	Single column stand
Net Weight	3.1kg
Package Size(W*D*H)	650*460*380mm
Gross Weight	7kg

Dispersing Shaft:

Type	Working Volume(ml)	Viscosity(cp)	Speed(m/s)	Length(m/s)	Diameter(m/m)
6G	0.2-50	100	5	130	6
8G	10-60	500	8	150	8
10G	30-150	2000	10	185	10
6G-ST	0.2-50	100	5	125	6
8G-ST	10-60	500	8	150	8
10G-ST	30-150	2000	10	185	10



Online Homogenizer



Introduction:

Online Homogenizer has high mixing efficiency, light weight, modular structure, easy operation and long-term operation. It can make 100% of the material pass through the shear cavity, with high efficiency and homogenization without dead angles. It can easily meet the requirements of laboratory simulation of online working conditions for circulation or online continuous processing. Applicable process: Laboratory online processing, which can circulate materials and complete online dispersion, emulsification, homogenization and mixing.

Features:

- * Brushless high-speed motor, long life design, can run stably for a long time
- * The working head and machine base are made of stainless steel, which is corrosion-resistant
- * Better sealing effect, unique stator and rotor structure, produce super strong shear force, quickly reduce particle size, process materials more finely and disperse more evenly.

Technical Parameters:

Model	BK-OH25	BK-OH25D
Item No.	1004027001	1004028001
Motor Power	1250W	750W
Motor Type	Brushless DC motor	
Speed Range	7500~30000rpm	4000~26000rpm
Adjustment Method	Gear adjustment	Knob speed control
Speed Display	Scale display	Digital display
Stirring Amount(H ₂ O)	1-30L/min	1-20L/min
Maximum Processing Viscosity	10000CP	10000CP
Standard Working Head	25DG	20DG
Standard Working Chamber	Stainless steel unjacketed working chamber	
Contact Material	SUS316L	
Mechanical Seal Material	SiC	
Inlet & Outlet Outer Diameter	12mm(Hose interface)	
Outer Size	460*120*120mm	460*120*120mm
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz	Standard: 220V 50/60Hz, optional: 110V 50/60Hz (The power will decrease)
Packing Size	470*330*200mm	
Gross Weight	10kg	

Muffle Furnace



Features:

- * External material: cold-rolled steel with anti-bacterial powder coating and internal material: high density ceramic fiber.
- * Dual ceramic inner chamber and hollow heat insulation ensure that the temperature can go up quickly.
- * Automatic parallel pressure door technology ensures the inner chamber temperature evenness and without leakage under the high temperature.
- * PID micro digital screen controller, fixing temperature, over-temperature alarming and auto-stop.
- * Safety protection measures: thermocouple failure, cut off power automatically when open the door and over temperature protection to avoid accidents occurring.
- * Double-shell hollow thermal insulation, the shell not hot and the furnace interior cool quickly.
- * TP series has 50-segment programmable temperature control, T series only has a single temperature segment.

Technical Parameters:

Model	MX2-10T/TP	MX7-10T/TP	MX16.5-10T/TP	MX30.5-10T/TP
Max. Temp.(°C)	1000			
Capacity(L)	2	8	16	30
Temp. Accuracy(°C)	1			
Temp. Uniformity(°C)	±15			
Rising Time(Empty)	40 minutes			
Material	External material: cold rolled steel carbon steel spraying Internal material: ceramic inner chamber			
Heating Element	Iron-chromium-aluminum			
Function	TP series has 50-segment programmable temperature control, T series only has a single temperature segment.			
Standard Accessory	Two crucibles, one pair of crucible pliers			
Optional Accessory	Power off upon door opening, timing function			
Consumption(KW)	1.5	3.5	6	12
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V, 50/60Hz			Standard: AC380V, 50Hz
Internal Size(W*D*H)mm	200*120*80	300*200*120	400*250*160	500*300*200
External Size(W*D*H)mm	420*500*545	520*600*670	590*720*730	650*820*760
Package Size(W*D*H)mm	512*590*595	612*690*780	682*820*780	742*920*810
Gross Weight(kg)	75	95	180	240

Muffle Furnace



Features:

- * The fully mirrored stainless steel furnace mouth remains unchanged despite long-term use.
- * The high-quality, double-insulated ceramic liner ensures stable performance.
- * The vacuum-formed polycrystalline mullite fiber furnace chamber provides efficient heat preservation.
- * The high-precision microcomputer controller and precision sensors are perfectly integrated to ensure precise temperature control.
- * The double-shell design features an air jacket for insulation and dual air ducts, ensuring excellent ventilation and low shell temperature rise.
- * The power connection for MC10-12 is through the air switch

Technical Parameters:

Model	MC2.5-12	MC5-12	MC10-12
Max Temp.	1200°C		
Temp. Rising Time (Empty)	≤30min		
Temp. Accuracy	±1°C		
Capacity(L)	2	7	16
Power(KW)	1.5	3	6
Power Supply	Standard: AC220V 50/60Hz; optional: AC110V 50/60Hz		Standard: AC380V 50/60Hz; optional: AC220V 50/60Hz
Internal Size(W*D*H)mm	120*200*80	200*300*200	250*400*160
External Size(W*D*H)mm	450*685*600	530*785*640	600*895*700
Packing Size(W*D*H)mm	570*770*740	650*870*780	720*980*845
Gross Weight(kg)	37	50	96

Features:

- * TP Series are programmable temperature control.
- * Utilizing vacuum forming technology and a unique thermal insulation design, the furnace shell maintains a low outer surface temperature.
- * Equipped with an over-temperature alarm and built-in parameter password control.
- * Fast heating speed and low energy consumption when the furnace is empty, saving over 50% in energy savings.
- * Display accuracy is ±1°C; the surge temperature is less than 3°C.
- * Multiple safety features ensure excellent safety performance and a long service life.
- * The side-opening door is convenient and easy to use.
- * The power connection is through the air switch.



MX6-10T/TP; MX8-10T/TP; MX16-10T/TP; MX6-12T/TP; MX8-12T/TP; MX8-13T/TP; MX10-13T/TP; MX30-10T/TP; MX30-12T/TP
MX6-16TP/ MX6-17TP
MX11-16TP/ MX11-17TP

Technical Parameters:

Model	MX6-10T/TP	MX8-10T/TP	MX16-10T/TP	MX30-10T/TP	MX6-12T/TP	MX8-12T/TP	MX30-12T/TP
Max. Temp.(℃)	1000				1200		
Capacity(L)	6	8	16	30	6	8	30
Temp. Accuracy	±1℃						
Power(kW)	2.8	3.5	6	10	2.8	3.5	10
Power Supply	Standard: AC220 50/60Hz; optional: AC110 50/60Hz	AC220 50/60Hz	Standard: AC220 50/60Hz; optional: AC380 50/60Hz	Standard: AC220 50/60 Hz(3-phase); optional: AC380 50/60Hz	AC220 50/60Hz		Standard: AC220 50/60 Hz(3-phase); optional: AC380 50/60Hz
Heating Rate	1~30℃/min for TP series						
Temp. Uniformity	±6℃						
Material	External material: Cold rolled steel carbon steel spraying; Internal material: Ceramic inner chamber						
Heating Element	Electric furnace wire						
Temp. Control	Intelligent temperature controller						
Optional	Accessory	Observation hole; Exhaust chimney; Furnace bottom plate (MX30-12T/TP is standard); Paperless recorder					
	Functions	Automatically power off once the door is opened; 30 programmable periods (only for T Type)					
Internal Size(W*D*H)mm	180*230*150	200*300*120	250*400*160	300*500*200	180*230*150	200*300*120	300*500*200
External Size(W*D*H)mm	500*510*640	500*580*610	550*690*660	600*780*710	500*510*640	500*580*610	600*780*710
Packing Size(W*D*H)mm	630*700*870	630*800*870	680*910*870	870*1110*990	630*700*870	630*800*870	870*1110*990
Gross Weight(kg)	82	84	111	146	82	84	146

Model	MX8-13T/TP	MX10-13T/TP	MX6-16TP	MX11-16TP	MX6-17TP	MX11-17TP
Max. Temp.(°C)	1300		1600		1700	
Capacity(L)	8	10	6	11	6	11
Temp. Accuracy	±1°C					
Power(kW)	4		8	12	6	8
Power Supply	AC220 50/60Hz		Standard: AC220 50/60Hz; optional: AC380 50/60Hz(2-phase)	AC380 50/60Hz (2-phase)	Standard: AC220 50/60Hz; optional: AC380 50/60Hz(2-phase)	AC380 50/60Hz (2-phase)
Heating Rate	1~30°C/min for TP series		1~15°C			
Material	External material: Cold rolled steel carbon steel spraying; Internal material: Ceramic inner chamber					
Heating Element	Silicon carbon rod S type thermocouple		Silicon molybdenum rod type B thermocouple			
Temp. Control	Intelligent temperature controller					
Optional	Accessory	Observation hole; Exhaust chimney; Furnace bottom plate; Paperless recorder		Exhaust chimney; Paperless recorder		
	Functions	Automatically power off once the door is opened; 30 programmable periods (only for T Type)		Automatically power off once the door is opened		
Internal Size(W*D*H)mm	200*300*120	200*300*180	150*300*120	200*300*180	150*300*120	200*300*180
External Size(W*D*H)mm	580*630*700	580*630*750	750*810*1360	1000*900*1600	750*810*1360	1000*900*1600
Packing Size(W*D*H)mm	710*910*920	770*860*1050	920*800*1150	1200*1100*1800	800*920*1150	1200*1100*1800
Gross Weight(kg)	119	130	237	350	237	350

Vacuum Atmosphere Furnace



Introduction:

This equipment adopts a built-in 310S high-temperature stainless steel vacuum chamber. The working chamber is completely isolated from the external heating chamber and heating elements. It is particularly suitable for users who have cleanliness requirements for test products or users who have corrosive substances such as acidic and alkaline atmospheres, water, carbon and hydrocarbons in the volatile working conditions during the heating process.

Technical Parameters:

Model	MXV7-11TP
Short-term Maximum Temperature	1100℃
Capacity	7.2L
Chamber Size	300*200*120mm
Temperature Control Accuracy	±1℃
Chamber Material	310S high-temperature stainless steel
Temperature Control Method	PID adjustable, 30 heating programs can be programmed
Rated Power	10kW
Flow Meter Range	0.6~6L/min
Vacuuming Capacity	-0.1MPa
Safety & Environmental Protection	The temperature control system has multiple safety protection measures such as short circuit, overcurrent protection, broken couple, overtemperature alarm and automatic power cut-off protection; the vacuum system has leakage protection, short circuit protection, overcurrent protection, motor overload protection and exhaust port oil mist filtration
Power Supply	AC380V 50/60Hz, Air switch
Packing Size(L*W*H)	1000*740*1500mm
Gross Weight	230kg

Ultrasonic Humidifier



BKDH-C03ZT/ BKDH-C06ZT



BKDH-C09ZT

Features:

- * High-precision humidity sensor, precise and automatic humidity control.
- * High-grade waterproof fan, high-frequency atomizer.
- * 304 brushed stainless steel housing for durability.
- * Double selection of water connection method (bottled water, water pipe).

Technical Parameters:

Model	BKDH-C03ZT	BKDH-C06ZT	BKDH-C09ZT
Capacity	3kg/h	6kg/h	9kg/h
Control Type	Auto		
Application Area	30-60m²	60-90m²	90-120m²
Power	300W	400W	700W
Machine Size	710*360*400mm	710*360*400mm	760*380*400mm
Power Supply	Standard: 220V 50Hz, optional: 220V 60Hz, 110V 60Hz		
Packing Size	770*450*590mm		820*470*590mm
Gross Weight	28kg		36kg

Dehumidifier

Home Dehumidifier



Features:

- * With active carbon filter. * Timing range: 1~24 hours.
- * LED display, indicate humidity. * Microcomputer control, intelligent operation.
- * With drains to keep continuous drainage function.
- * Low temperature available, efficient automatic defrosting system.
- * E series, high sensitivity causative touch screen, D series, button screen.
- * Voice prompt function: the dehumidifier stop work and alarm when the water tank is full.

Technical Parameters:

Model	BKDH-820E	BKDH-830E
Humidity Removal Capacity	20L/24H	30L/24H
Humidity Adjusted Range	40%~90%RH	
Air Circulation	280 m³/h	310 m³/h
Refrigerant	R134A	
Material	ABS	
Applying Area	30~70 m²	35~80 m²
Power Supply	Standard: 220V 50Hz, Optional: 110V 60Hz	
Consumption	280W	330W
Water Tank	5.1L	
External Size (W*D*H)	373*266*612mm	
Packing Size (W*D*H)	410*310*680mm	
Net Weight	14kg	14.5kg
Gross Weight	15kg	15.5kg
Border Color	Green/Black	Green/Black



Features:

- * With active carbon filter. * Timing range: 1~24 hours.
- * LED display, indicate humidity. * Microcomputer control, intelligent operation.
- * With drains to keep continuous drainage function.
- * Low temperature available, efficient automatic defrosting system.
- * E series, high sensitivity causative touch screen, D series, button screen.
- * Voice prompt function: the dehumidifier stop work and alarm when the water tank is full.

Technical Parameters:

Model	BKDH-850D	BKDH-860D	BKDH-860E
Humidity Removal Capacity	50L/24H	60L/24H	
Humidity Adjusted Range	40%~90%RH		
Air Circulation	710 m³/h	723 m³/h	
Refrigerant	R410A		
Material	ABS		
Applying Area	50~110 m²	70~120 m²	
Power Supply	Standard: 220V 50Hz, Optional: 110V 60Hz		
Consumption	700W	740W	
Water Tank	10L		
External Size (W*D*H)	436*290*720mm		
Packing Size (W*D*H)	490*350*780mm		
Net Weight	23.5kg	24.5kg	
Gross Weight	26kg		
Border Color	Black		Black/Green

Commercial Dehumidifier



Features:

- * Microcomputer control, intelligent operation
- * LED display, indicate humidity
- * Low temperature available, efficient automatic defrosting system
- * Timing range: 1~24 hours
- * Pipe continue drainage function

Technical Parameters:

Model	BKDH-890D	BKDH-8138D
Humidity Removal Capacity	90L/24H	138L/24H
Humidity Adjusted Range	10%~90%RH	
Air Circulation	1100 m³/h	1200 m³/h
Refrigerant	R410A	
Material	Cold Rolled Plate Coating	
Applying Area	90~150 m²	130~180 m²
Power Supply	Standard: 220V 50Hz, Optional: 110V 60Hz	
Consumption	1300W	1500W
External Size (W*D*H)	480*420*960mm	480*420*1060mm
Packing Size (W*D*H)	550*470*1060mm	550*470*1150mm
Net Weight	50kg	60kg
Gross Weight	55kg	65kg

Industrial Dehumidifier



Features:


- * With memory function in case of power-failure
- * World famous brand compressor, and high-quality centrifugal fan with low noise
- * Microcomputer automatic control, large LED display
- * 10L built-in water tank or external pipe is available (for BKDH-6.8DT)
- * Equipped with a handle and big wheels, mobile and portable (for BKDH-6.8DT)
- * Timing range: 1~24 hours
- * Automatic defrost system with high-efficiency
- * Automatic fault diagnosis function
- * Continuous pipe drainage function

Technical Parameters:

Model	BKDH-6.8DT	BKDH-12KT	BKDH-15KT	BKDH-20KT
Humidity Removal Capacity	7L/h	10L/h	16L/h	20L/h
Working Condition	At 30℃, 80% humidity , it achieves maximum dehumidifying capacity			
Air Circulation	2000m³/h	2800m³/h	4000m³/h	5600m³/h
Refrigerant	R410A			
Control Precision	±5%RH			
Applying Area	180~230 m²	250~350 m²	350~400 m²	450~550 m²
Applicable Temperature	5~38℃			
Defrost	Auto Defrost			
Consumption	2100W	3800W	6100W	8000W
Drainage Type	10L Water tank(standard) or external pipe		External pipe	
Power Supply	Standard: 220V 50Hz, Optional: 220V 60Hz		Standard:380V , 50Hz Optional: 380V 60Hz,480V 60Hz	
External Size(W*D*H)	525*740*1155mm	770*470*1630mm	1095*485*1750mm	1095*485*1750mm
Package Size(W*D*H)	770*590*1260mm	870*570*1640mm	1105*495*1760mm	1280*620*1900mm
Net Weight	95kg	140kg	250kg	270kg
Gross Weight	100kg	150kg	260kg	280kg

Filtration Apparatus

Manifolds Vacuum Filtration

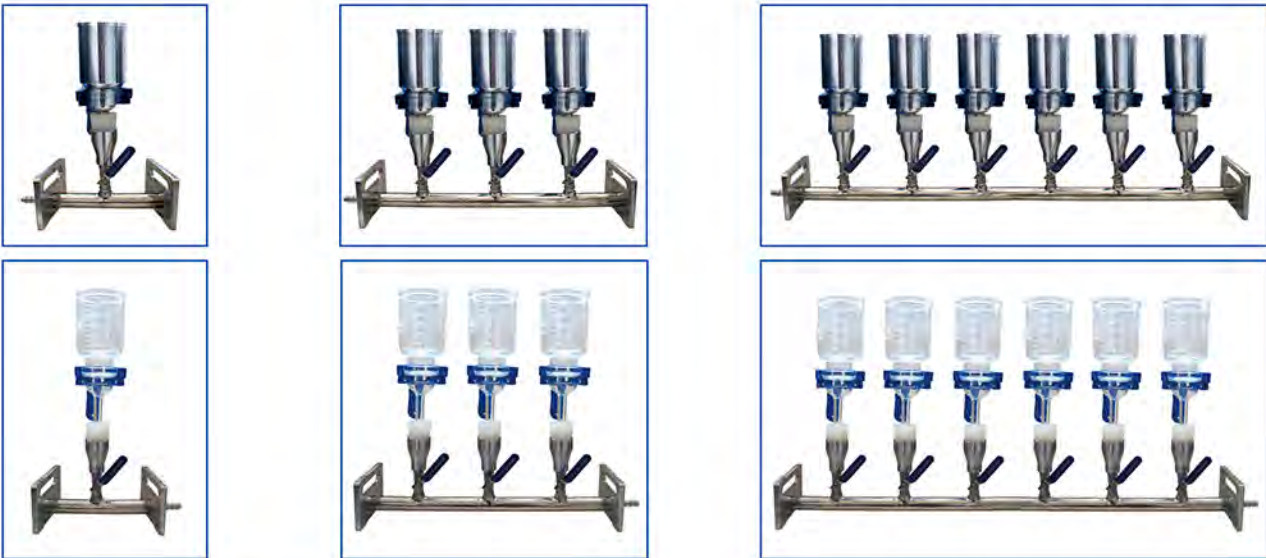

Optional Accessories:
 MVF-1G & MVF-1S:
 GM-0.2/0.33II/0.5/0.5II/1.0 Vacuum pump;
 Liquid collecting bottle
 MVF-3G & MVF-3S:
 GM-0.5/0.5II/1.0 Vacuum pump;
 Liquid collecting bottle
 MVF-6G & MVF-6S:
 GM-1.0 Vacuum pump; Liquid collecting bottle

Product Introduction:

- * It is convenient to filtrate several samples at the same time.
- * 316L stainless steel holder, corrosion resistance, acid and alkali resistance.
- * Each holder has individual control valve, so one vacuum pump can support operations of single and multi-branch manifold filter.
- * It can be widely used in chemistry analysis, pharmaceutical, sanitation test, water quality analysis, science research fields and so on.

Standard Accessory:


- * Lid
- * Stainless steel valve
- * Clamp of aluminum alloy
- * 316L stainless steel holder
- * Glass funnel (300ml) / 316L stainless steel funnel (300ml)
- * Borosilicate glass filter head / 316L stainless steel filter head

Technical Parameters:

Model	Type	Funnel	Connection	Holder	Package Size(W*D*H)	G.W.
MVF-1G	1-branch	Glass	Ground Joint	SS316	310*310*370mm	4kg
MVF-1S		SS316	Integral, SS316	SS316	270*260*140mm	3kg
MVF-3G	3-branch	Glass	Ground Joint	SS316	530*360*370mm	9kg
MVF-3S		SS316	Integral, SS316	SS316	490*260*140mm	5.7kg
MVF-6G	6-branch	Glass	Ground Joint	SS316	970*360*370mm	17kg
MVF-6S		SS316	Integral, SS316	SS316	920*260*140mm	10.3kg

Note: The vacuum pump and liquid collecting bottle are essential optional accessories. Otherwise, it cannot be used.

Solvent Filtration Apparatus

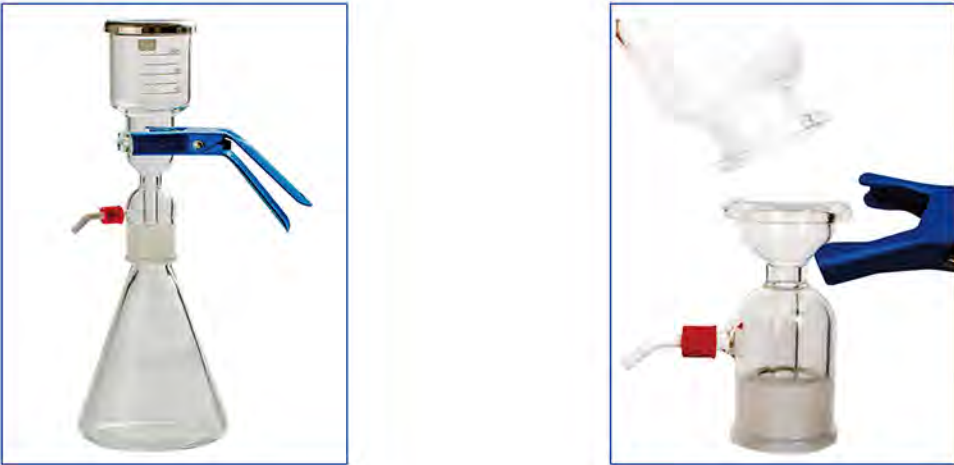

Applications:

Solvent filter is a regular device of chemistry lab, it is indispensable equipment for HPLC analysis. This device can also be used in instrumental analysis, sanitary inspection, pharmaceutical industry, pesticide liquid filtration, petroleum, environmental monitoring fields. It can monitor and remove the particles and bacteria in the liquid.

Features:

- * It is made of high quality toughened glass.
- * With good press-resistance and leakproofness, it could be used for sterilizing at high temperature of 121℃.
- * The PTFE type is acid and alkali resistant, corrosion resistant, can filter all kinds of aqueous solution, organic solution and corrosive liquid.

Standard Accessory:

Solvent Filter system consists of solvent filter

Filter Include:

* Triangle fluid bottle	* Clamp	* Hose linker
* Core filter head	* Dust cover	
* Filter bowl	* Rubber hose	

Technical Parameters:

Model	Funnel	Pore Size of Filter	Support Screen	Receiving Bottle	Membrane	Packing Size	Gross Weight
SFA-50.1L	300ml	10μm	Pyrex glass	1000ml	Φ47 or Φ50mm	310*310*190mm	2kg
SFA-50.2L	500ml	10μm	Pyrex glass	2000ml	Φ60mm	370*345*255mm	3.1kg
SFA-50.PT	300ml	20μm	PTFE	1000ml	Φ47 or Φ50mm	310*310*190mm	2kg

Digester
Microwave Digester



Introduction:

BIOBASE microwave digestion system provides a fast, safe and automatic solution for samples, accelerates the speed of sample digestion reaction under high pressure conditions. It is widely used in food, textile, plastic, geological, metallurgical, coal, biological medicine, petroleum chemical industry, environmental monitoring, sewage treatment, battery manufacturing, cosmetics, etc.

Features:

- * Microwave non-pulse continuous automatic frequency conversion control, 0 ~ 100% automatic output.
- * Vertical bidirectional waveguide design, 3D output technology, and matching harmonic power frequency achieve a high degree of field uniformity.
- * SUS316 stainless steel chamber.
- * Self-locking buffer explosion-proof furnace door, when the reaction is abnormal, buffer structure to ensure the operator's personal safety and integrity of the door structure.
- * 8"TFT-LED touch screen display the temperature and pressure curve in real time.
- * 360° continuous rotation in the same direction, microwave uniformity, to ensure that the microwave environment of each sample is the same, improve the consistency of experimental results.
- * Non-contact infrared temperature control system and non-contact pressure control system.
- * Exhaust and cooling system: acid-resistant centrifugal fan, exhaust air volume is not less than 5m³/min; With air cooling function, continuous cooling for the reaction vessel, temperature and pressure real-time display.
- * With fault self-test system, when the temperature or pressure control system fails, the instrument will automatically cut off the microwave emission, and alarm.
- * The material is TFM for the inner vessel and PEEK aerospace composite material for the vessel explosion-proof outer casing.

Technical Parameters:

Model	BMD-10H	BMD-12H	BMD-Z40
Chamber	52L, SS316	58L, SS316	72L, SS316
Microwave Source	Professional microwave source, industrial microwave power supply		
Microwave Frequency	2450 MHz		
Microwave Output Power	0~2000W	1400~2800W	
Display	8"TFT-LED touch screen		
Max. Temp.	300℃		
Temp. Accuracy	±0.5℃		
Max. Pressure	10MPa		15MPa
Pressure Accuracy	±0.01Mpa		
Temperature Sensor	Non-contact infrared temperature sensor		
Vessel Quantity Capacity	10 Vessels	12 Vessels	40 Vessels
Vessel Volume	70ml(Standard), 100ml(Optional)		
Vessel Material	Vessel made of TFM, explosion-proof outer vessel made of PEEK aerospace composite material		
Cooling Method	Forced air cooling		
Standard	Turntable bracket, PEEK explosion-proof outer*10, TFM inner vessel*10, infrared temperature sensor, graphite acid evaporator	Turntable bracket, PEEK explosion-proof outer*12, TFM inner vessel*12, infrared temperature sensor, graphite acid evaporator	Turntable bracket, PEEK explosion-proof outer*40 TFM inner vessel*40, infrared temperature sensor*2, graphite acid evaporator*2, transfer inner vessel bracket*2, spanner
Consumption	2600W		2800W
Power Supply	AC220±10%, 50/60Hz (Standard); AC110V,60Hz (Optional)		
External Size (W*D*H)	590*620*830mm		720*720*800mm
Package Size (W*D*H)	Main Body: 590*620*830mm Accessory: 820*300*130mm		Main Body: 800*800*950mm Accessory: 200*250*250mm; 200*250*250mm
Gross Weight	Main Body: 75kg Accessory: 25kg	Main Body: 75kg Accessory: 27kg	Main Body: 100kg Accessory: 20kg; 20kg

Intelligent microwave synthesis / extraction system



Introduction:
 The intelligent microwave synthesis/extraction system can catalyze many types of organic, pharmaceutical and biochemical reactions such as addition, substitution, esterification, hydrolysis, acylation, polymerization, condensation, cyclization and oxidation, as well as solvent extraction of food, natural products and minerals.

- Features:**
- * Accurate temperature control, 8-inch display, touch control, simple and convenient operation, can store data.
 - * Real-time online display and recording of reaction data and curve images.
 - * The program controls the reaction conditions and the experiment can be divided into multiple working phases.
 - * The parameters of unsuitable reaction conditions can be modified online at any time.
 - * It has the function to save and query experimental records.

Technical Parameters:

Model	BMS-WHC1
Reaction Volume	10~1500ml
Microwave Reaction Chamber	42 liters stainless steel chamber, surface multi-layer anti-corrosion coating on the surface, corrosion resistance, high temperature resistance.
Microwave Reaction System	Open reaction system, can be installed drip funnel and condenser tube for reflux reaction, microwave leakage in line with national standards, safe and reliable.
Microwave Power	0-1000W, with 10 adjustable power levels,microwave power is controlled automatically with temperature conversion.
Control System	High precision contact platinum-plated temperature sensor, real-time monitoring of reaction temperature, accurate control of reaction process.
Working Time	Can work continuously for 8 hours.
Display	8 inch touch screen LCD display, touch operation, real-time display of closed reaction tank temperature and temperature curve, and has the function of saving and querying experimental records.
Magnetic Stirring	Provide different speeds of magnetic stirring, infinitely variable speed 0~2000 RPM; Mechanical stirring speed range: 0~2000 RPM (optional).
Temp. Range	0~300℃
Temp. Accuracy	≤±1℃
Temperature Control	The intelligent temperature control mathematical model algorithm ensures the accuracy of temperature control, and eliminates the phenomenon of over temperature and low temperature.
Interface	Equipped with inert gas protection interface.
Supply Power	AC220V,50/60Hz(Standard); AC110V,50/60Hz(Optional)
Package Size(W*D*H)	550*550*600mm
Gross Weight	45kg

Solid Phase Extraction System



Introduction:
 The solid phase extraction system is a negative pressure solid phase extraction device. It uses a solid adsorbent to adsorb the target compound in a liquid sample, separates it from the sample matrix and interfering compounds, and then eluates it with an eluent or heats to desorb it to achieve separation and Purpose of enrichment of target compounds (I.e. the separation, purification and enrichment of the sample), the solid phase extraction instrument aims to reduce the interference of the sample matrix and improve the detection sensitivity.

- Features:**
- * The whole machine of 12, 24, and 36-well square solid phase extraction instrument is made of transparent organic glass, which has strong corrosion resistance;
 - * The wall thickness of the vacuum tank is uniform, so it can withstand high negative pressure above -0.096Mpa, and it will not deform after long-term high-pressure use;
 - * The pressure is uniform everywhere, the air tightness is good, and the stability is strong;
 - * The extraction speed is consistent, and the control and adjustment are convenient;
 - * Multi-channel can be controlled independently, and the joint is corrosion-resistant;
 - * The internal test tube rack of the solid phase extraction instrument is made of polytetrafluoroethylene, so it has high corrosion resistance.

Technical Parameters:

Model	BK-SPE-12	BK-SPE-24	BK-SPE-36
Capacity	12	24	36
Gas Control Mode	Independent control		
Working Zone Size (mm)	210*100*138	210*120*138	210*140*138
Pressure Display	Pressure gauge		
Vacuum Value	0. 098Mpa		
Flow Control Valve	12	24	36
Optional Accessories	GM-DP01 Vacuum pump		
Package Size (mm)	460*200*290mm		
Gross Weight (kg)	3.6	3.8	4

Separatory Funnel Shaker



Features:

- * Vertical shaker equipment can automatically shake separating funnel, complete liquid-liquid extraction, sample mixing, etc.
- * Large amplitude, high speed, working time can be set.
- * Adjustable frequency, batch samples processing, high efficiency, high recovery rate, minimizing operator exposure to chemical agents to protect personal safety.
- * Easy to install & operate, meet the needs of all types of laboratory extraction purification.
- * Shaking by both vertical & slant methods. Powerful strength for the mix of extraction liquid & water.
- * Low noise & long-time stable working.
- * Rotated sample holder, easy to install & detach specimen.
- * Varies sample holders alternative to adapt varies experiments.

Technical Parameters:

Model	BK-VS06	BK-VS08	BK-VS10
Sample Capacity	6pcs	8pcs	10pcs
Shaking Method	Vertical Shake (tilt angle 0-20° adjustable)		
Shaking Amplitude	≥40mm		
Shaking Frequency	100-300 times/min adjustable		
Frequency Control	Infinitely variable speeds		
Operation Mode	Continuous operation, interval operation, curve operation		
Timing Range	Max 15 minutes(count down applied)		
Applied Vessel	50ml-2000ml separating funnel, 100ml and 250ml conical flask, 100ml measuring cylinder with stopper, 100ml colorimetric tube with stopper, 100ml volumetric flask with stopper, etc., no need to change the fixture		
Extraction Efficiency	95~110%		
Rated Load	Bilateral symmetry 11kg		
Power Supply	AC220±10%, 50/60Hz(Standard); 110V,60Hz(Optional, External transformer)		
Packing Size	810*710*1080mm		
Net Weight	120kg	122kg	124kg
Gross Weight	148kg	152kg	154kg

Introduction:

The separating funnel shaker, also known as the vertical oscillator and extraction oscillator, is designed to improve the efficiency of extraction and purification. This product has many functions, such as adjustable oscillation frequency and angle, wide timing range, frequency digital display, and various sample racks, greatly improving the efficiency of extraction and purification, and reducing work intensity. The operation and installation of this product are very simple, and can meet various needs of laboratory extraction and purification.



Features:

- * It has two oscillation modes, namely inclined oscillation and vertical oscillation. Greater mixing power is provided.
- * It adopts a DC brushless motor to ensure long-term stable oscillation frequency.
- * Microprocessor control is adopted to achieve intelligent speed regulation. The digital display function of the LCD instrument is supported.
- * The speed can be accurately controlled with an error of approximately ± 1rpm. It has automatic recovery of incoming calls and timed endpoint alarm functions.
- * Multiple sample racks can be selected, making installation or disassembly very convenient and meeting various experimental requirements.
- * The product has stable performance, compact structure, low noise, and long-term stable oscillation frequency.
- * This product has a wide range of use, high power, and a maximum load of 20kg.
- * The start buffer and stop buffer functions are available to achieve slow start and stop, and to reduce impact on the separation funnel.
- * The separating funnel bottle is prepared by the customer. When leaving the factory, this product is not equipped with a separating funnel bottle.

Technical Parameters:


Model	BK-SFS-2LX6	BK-SFS-2LX8
Display Mode	Liquid-crystal display	
Maximum Sample Size	6-bit*2000ml	8-bit*2000ml
Oscillation Amplitude	0~40mm	
Hunting Speed	0~350r/min	
Speed Accuracy	±1rpm	
Timing Range	0~9999 minutes or continuous continuously	
Sample Specifications	125~2000ml pear-shaped split liquid funnel bottle	
Oscillation Tilt Angle	From 0 to 20° for free regulation	
Load	20kg	
Operating Ambient Temperature	5~40℃	
Operating Ambient Humidity	40~80%	
Consumption	300W	350W
Power Supply	Standard:AC220V, 50/60Hz; Optional:AC110V, 60Hz	
Package Size(W*D*H)	780*680*760mm	850*820*760mm
Net Weight	122kg	155kg
Gross Weightt	137kg	170kg

Heavy Metal Digester



Introduction:

Heavy metal digester has the advantages of fast digestion, high efficiency, convenience and large processing capacity. It is an ideal pre-treatment equipment for atomic absorption spectroscopy, ICP mass spectrometry and other elemental analysis instruments.



Touch screen operation



PTFE Digestive Tube

Application:

According to the experimental needs, can choose PTFE and silica glass two kinds of test tube, fully expand the user digestion acid range. Suitable for food, medicine, agriculture, forestry, environmental protection, chemical, biochemical and other industries as well as universities, scientific research departments to soil, feed, heavy metals, ore and other samples digestion treatment before chemical analysis.



Soil



Ore



Heavy Metal



Feed

Features:

- * The temperature in the furnace can be continuously adjusted, high precision , the temp. of the controlled point is constant, high heat conduction efficiency.
- * Separate isolation design of control system and heating system to reduce the influence of high temperature radiation and acid corrosion on the control system.
- * With overvoltage, overcurrent, overheat, overtemperature alarm, automatic fault alarm and other multiple protection.
- * Embedded software temperature control technology, PID temperature control.
- * Automatic detection of heating unit work fault and can determine the fault module.
- * New flame retardant environmental protection materials and air duct insulation.
- * PTFE and borosilicate glass two kinds of test tubes are available.
- * Surround three-dimensional heating, so that all parts of the sample are heated evenly.
- * Heating block is treated with special anti-oxidation technology to prolong the service life.

Technical Parameters:

Model	GDA-30	GDA-30A
Temp. Range	RT+5℃~450℃	
Temp. Accuracy	±1℃	
Capacity	30pcs	
Digestive Tube	Glass tube scale 50ml (full capacity 100ml)	
	PTFE tube 50ml (full capacity 70ml)(standard 30pcs)	
Heating Mode	Infrared heating and high purity graphite conduction	Infrared radiation aluminum conduction
Insulation Mode	Ceramic fiber, split air duct insulation	
Display	7-inch high resolution color LCD screen	
Alarm	Over temperature alarm	
Consumption	3.4kW	
Power Supply	Standard: AC220V±10%, 50/60Hz	
	Optional: AC110V±10%, 50/60Hz	
External Size(W*D*H)	480*390*177mm	
Package Size(W*D*H)	610*500*455mm	
Net Weight	26kg	28kg
Gross Weight	38kg	40kg

Kjeldahl Apparatus
Graphite Digester



GDA-10



GDA-20

Introduction:

Graphite Digester adopts infrared radiation graphite conduction heating technology, accurate temperature control, uniform heating, fast heating speed.



Touch screen operation



Collection System



Reflux design

Application:

Food, medicine, agriculture, forestry, environmental protection, chemical, biochemical and other industries as well as quality inspection institutions, universities, scientific research departments to soil. Sample digestion processing prior to chemical analysis of grain, feed, food, water, plants, seeds, ores, heavy metals, etc



Food



Grain



Feed



Soil

Features:

- * Infrared radiation graphite conduction heating method, fast heating speed, the temperature difference between the holes is small, and the sample digestion is consistent.
- * PID intelligent temperature control algorithm, accurate and stable control, adapt to different sample pretreatment.
- * Two heating methods of curve heating and linear heating, 200 groups of digestion programs can be edited and stored, and each group can be set up to 25 segments.
- * Temperature and time gradient to meet different experimental needs of users.
- * Special anti-corrosion treatment to avoid the corrosion of acidic liquid on the machine.
- * 7-inch high resolution LCD display, real-time display temperature curve.
- * Overvoltage, overcurrent, overheating and other alarm Settings and leakage protection.
- * New ceramic fiber insulation layer and air duct insulation technology.
- * Standard digestive tube cooling rack and drip tray, the digestive tube can be cooled quickly.
- * Exhaust hood, PTFE sealing cap seal, prevent operators from inhaling harmful gases.

Technical Parameters:

Model	GDA-10	GDA-20
Temp. Range	RT+5℃~450℃	
Temp. Accuracy	±1℃	
Capacity	10pcs	20pcs
Digestive Tube	Glass tube 300ml*10	Glass tube 300ml*20
Heating Mode	Infrared heating and high purity graphite conduction	
Insulation Mode	Ceramic fiber, split air duct insulation	
Display	7-inch high resolution color LCD screen	
Consumption	1.8KW	3.4KW
Power Supply	Standard: 220V±10%, 50/60Hz Optional: 110V±10%, 50/60Hz	
External Size(W*D*H)	360*390*177mm	480*390*177mm
Package Size(W*D*H)	670*560*630mm	700*610*770mm
Net Weight	20kg	26kg
Gross Weight	38kg	58kg

Digester



GDA-10A



GDA-20A

Introduction:

The digester furnace is a precision sample digestion device with accurate temperature control, uniform heating, and excellent corrosion resistance. It uses programmed heating and digestion systems to convert samples into clear, homogeneous liquids for subsequent analysis, making it an essential tool for sample pretreatment in chemical testing.

Features:

- * Infrared radiation aluminum conduction heating method, fast heating speed, the temperature difference between the holes is small, and the sample digestion is consistent.
- * PID intelligent temperature control algorithm, accurate and stable control, adapt to different sample pretreatment.
- * Two heating methods of curve heating and linear heating, 200 groups of digestion programs can be edited and stored, and each group can be set up to 25 segments.
- * Temperature and time gradient to meet different experimental needs of users.
- * Special anti-corrosion treatment to avoid the corrosion of acidic liquid on the machine.
- * 7-inch high resolution LCD display, real-time display temperature curve.
- * Overvoltage, overcurrent, overheating and other alarm Settings and leakage protection.
- * New ceramic fiber insulation layer and air duct insulation technology.
- * Standard digestive tube cooling rack and drip tray, the digestive tube can be cooled quickly.
- * Exhaust hood, PTFE sealing cap seal, prevent operators from inhaling harmful gases.

Technical Parameters:

Model	GDA-10A	GDA-20A
Temp. Range	RT+5℃~450℃	
Temp.Accuracy	±1℃	
Capacity	10pcs	20pcs
Digestive Tube	Glass tube 300ml*10	Glass tube 300ml*20
Heating Mode	Infrared radiation aluminum conduction	
Insulation Mode	Ceramic fiber, split air duct insulation	
Display	7-inch high resolution color LCD screen	
Consumption	1.8kW	3.4kW
Power Supply	Standard: 220V±10%, 50/60Hz; Optional: 110V±10%, 50/60Hz	
External Size(W*D*H)	360*390*177mm	480*390*177mm
Package Size(W*D*H)	670*570*650mm	770*670*650mm
Net Weight	21kg	28kg
Gross Weight	39kg	47kg

Automatic Digester

Introduction:

The GDA-20S is a sample pretreatment equipment with precise temperature control, uniform heating, and strong corrosion resistance. Its core function is to convert test samples into clear, homogeneous liquid samples via a programmed high-power electric heating system and digestion system, laying the foundation for subsequent detection. With a built-in automatic lifting system, it achieves full automation of the digestion process, boasting high efficiency, energy saving, and large processing capacity.



Features:

- * Digestion tubes & waste discharge pipes: Explosion-proof safety glass (explosion-proof and high-temperature resistant);
- * Aluminum deep-hole heating modules: High heating efficiency, fast warming, long service life, and eco-friendly;
- * Standard lifting device: One-key operation, automatic lifting during the whole experiment, no personnel on duty needed (energy-saving & efficient);
- * High-power electric heating tubes: Fast heating rate to reduce experimental time;
- * Excellent heat preservation: Lowers energy consumption while ensuring temperature stability and operational safety;
- * Digestion rack & waste hood: 304 stainless steel (strong corrosion resistance);
- * PTFE (polytetrafluoroethylene) digestion tube caps: High-temperature and acid-resistant, reducing acid gas leakage and environmental pollution;
- * Aluminum parts: Anodized surface treatment for enhanced corrosion resistance.

Technical Parameters:

Model	GDA-20S
Temp. Range	RT+5~450℃
Temp. Accuracy	±1℃
Capacity	20pcs
Digestive Tube	Glass tube 300ml*20
Heating Mode	6061 aluminum alloy
Heating Rate	8~15℃/min
Heating Method	Electric heating tube
Display	7-inch high resolution color LCD screen
Consumption	2.7kW
Power Supply	Standard: AC220V±10%, 50/60Hz; Optional: AC110V±10%, 50/60Hz
External Size(W*D*H)	435*640*750mm
Package Size(W*D*H)	560*820*980mm
Net Weight	60kg
Gross Weight	85kg

Semi Automatic Kjeldahl Nitrogen Analyzer

Applications:

Widely used in food processing, feed production, tobacco, animal husbandry, soil fertilizer, environmental monitoring, medicine, agriculture, scientific research, teaching, quality supervision and other fields, nitrogen or protein content determination; It can also be used for the detection of ammonium salt, volatile fatty acid/alkali, soil cation exchange capacity, etc.

Features:

- * 7-inch high-resolution color LCD display, real-time control of the experimental process
- * Manual/automatic dual mode can be switched freely. In the automatic mode, it can automatically quantitatively add lye, boric acid receiving solution, dilution water and other automatic waste discharge systems. After the experiment is completed, the waste liquid in the digestive tube is automatically discharged, and the rinsing time can be set freely.
- * The distillation time can be set arbitrarily, and the alarm prompts the end of the distillation. The safety protection design of the experiment, the safety door protection and the reminder function that the digestive tube is not in place
- * Water-saving function design, condensed water flow rate 1.5L/min, real-time flow monitoring, low water pressure alarm display
- * Real-time monitoring of steam generator temperature, pressure and water level to ensure safe and reliable experiment process
- * Emergency stop operation function and automatic fault detection function, sound and light alarm in case of fault, intelligent bullet box display
- * Adopt high reliable PTFE pump, special corrosion resistance, anti crystallization, stable liquid addition, stable negative pressure suction
- * The whole machine of the instrument is made of ABS engineering plastics, which is corrosion-resistant, waterproof and leak-proof

Technical Parameters:

Model	AKN-01	AKN-01S
Measuring Range	0.1mg-240mg N	
Recovery Rate	≥99.5%	
Sample Amount	Solids≤6g; Liquids≤20mL	
Distillation Speed	3-6min/sample	
Distillation Time	0-60min	
Repeatability	≤0.5%	
Cooling Water Consumption	1.5L/min	
Operating Mode	Automatic/manual dual modes	
Automatic drainage	/	Automatically emptying and cleaning digestive tube waste liquid
Reagents Bottle Liquid Level Detection	/	Yes
Reagents Bottle	4pcs	
Protection Device	Flow rate detection, liquid level alarm, over temperature and over pressure protection	
Display	7 inches LCD display	
Rated Power	1.4kW	
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz	
External Size	490*380*725mm	
Net Weight	35kg	
Packing Size	630*560*1350mm	
Gross Weight	52kg	



Fully-automatic Kjeldahl Nitrogen Analyzer

Applications:

Widely used in food processing, feed production, tobacco, animal husbandry, soil fertilizer, environmental monitoring, medicine, agriculture, scientific research, teaching, quality supervision and other fields, nitrogen or protein content determination; It can also be used for the detection of ammonium salt, volatile fatty acid/alkali, soil cation exchange capacity, etc.

Features:

- * Automatically add dilution water, add alkali, add receiver solution, distillation, titration, calculation, printing, automatic emptying function of digestion tube and receiving cup, steam flow adjustment, fault self-checking and other functions.
- * New Android operating system, with 7-inch high-definition color touch screen, real-time control of the experiment process.
- * External titration cup design, the operator can control the experimental process in real time.
- * Steam flow can be adjusted within the range of 0~100%.
- * With user authority classification function, operation log query, data traceability management can be realized.
- * The instrument has a built-in 8G storage space and a variety of built-in application solutions.
- * Quick emptying function of digestive tube, avoiding experimenters from contacting distillation high-temperature waste liquid.
- * High-precision dosing pump and titration system ensure the accuracy of experimental results.
- * Titration process image curve display, online monitoring of the whole experimental process, real-time monitoring.

Technical Parameters:

Model	AKN-10S
Measuring Range	0.1mg-240mg N
Recovery Rate	≥99.5%
Sample Amount	Solids≤6g; Liquids≤25mL
Distillation Speed	3-8min/sample
Distillation Time	0-99min
Repeatability	≤0.5%
Titration Precision	1.0ul/step
Storage Data	1 million groups
Reagents Bottle Liquid Level Detection	Yes
Protection Device	Flow rate detection, liquid level alarm, over temperature and over pressure protection
Display	7 inches LCD display
Rated Power	2kW
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz
External Size	490*380*725mm
Net Weight	38kg
Packing Size	630*560*1350mm
Gross Weight	52kg



Semi-Automatic Kjeldahl Nitrogen Analyzer
(Kjeldahl Distiller)



Features:

- * 4-inch color touch screen, man-machine dialogue is easy to operate and easy to learn.
- * Complete the whole experimental process with one key (adding boric acid, adding diluents, adding alkali, automatic distillation, sample recovery, automatic stop sample separation and recovery).
- * 304 stainless steel steam pot has stable performance, reliable and strong pressure resistance.
- * High polymer material ammonia separator can meet the application of alkaline conditions.
- * The system automatically shuts down after 60 minutes of unmanned operation, energy saving, safety and rest assured.
- * Safety door to ensure the safety of operators.
- * Steam system water shortage alarm prompts, shutdown to prevent accidents.
- * Steam pot over temperature alarm, stop to prevent accidents.

Technical Parameters:

Model	BKN-200
Measure Range	0.1mg~240mgN
Reproducibility	±0.5%
Recovery Ratio	99~101%
Analysis Time	3~5min/sample (Cooling water temperature is 18℃)
Distillation Time	10~9990s, adjustable
Sample Amount	Solid ≤6g; Liquid ≤16ml
Display	4-inch color touch screen
Automatic Shutdown Time	60 minutes
Water Consumption	1.2~3L/min
Consumption	2000W
Power Supply	AC220 V ±10%, 50/60Hz
Standard Accessories	Reagent buckets*3, Waste bucke*1, Reagent pipelines*5; Cooling water pipes*2
External Size(W*D*H)	360*550*700mm
Gross Weight	23Kg
Packing Size(W*D*H)	Main body: 670*580*870mm Accessories: 600*400*470mm
Gross Weight	Main body: 26kg Accessories: 6kg



BKN-983

Features:

- * 7 inch LCD display.
- * Manual/automatic mode can be switched freely.
- * The control system has high precision and good stability.
- * 99 groups of user-defined programs.
- * Automatic control of adding alkali and boric acid solution, silution and elution.
- * Multi-protection function, such as safety door, overpressureprotection, watershortageprotection, etc.

Technical Parameters:

Model	BKN-983
Measure Range	0.1~240mgN
Recovery Ratio	99~101%
Reproducibility	±0.5%
Data Storage	1,000,000 groups
Sample Amount	Solid<6g; Liquid<16ml
Distillation Speed	3~4min/sample
DistillationTime	10~9990s
Cooling Water Consumption	15L/min
Requirement of Cooling Water	<18℃
Consumption	2000W
Power Supply	AC220V,50/60Hz
Interface	RS 232
Standard Accessories	10L distilled water tank*1, 5L boric acid tank*1, 5L alkali solution tank*1, 20L waste liquid bucket*1
Packing Size(W*D*H)	960*600*1000mm
Gross Weight	50kg

Fully Automatic Kjeldahl Nitrogen Analyzer

Features:

- * Large LCD touch screen.
- * The control system has high precision and good stability.
- * Choose R, G, B three-color light source and three-color sensor, with a wide range of color adaptation and high precision.
- * 99 groups of user-defined programs.
- * 304 stainless steel material.
- * Multi-protection function,such as safety door, overpressure protection, water shortage protection,etc.

Additional Features of BKN-987A:

- * It could show the titration curve.
- * One key to wash the alkali liquor pipes.
- * Automatically discharge the waste in the digestive tubes.



BKN-987/987A

Technical Parameters:

Model	BKN-987	BKN-987A
Working Process	Adding quantitative sample dilution, alkali liquor and absorption liquid; Automatically finishing distillation, titration, print and liquid-discharging.	
Measurement Range	0.1~240mgN	0.1~210mgN
Sample Amount	Solid<6g; liquid<16ml	
Measurement Time	4~8min/(cooling water temperature 18℃)	
Requirement of Cooling Water	<18℃	
Cooling Water Consumption	1.5L/min	
Titration Solution Concentration	0.01~5 mol/L	
Titration System	High-precision plunger type titration system	
Repeatability	±0.5%	
Recovery Ratio	99~101%	
Data Storage	1,000,000 groups	
Consumption	2000W	
Power Supply	AC220V, 50/60Hz	
Interface	RS 232	
Standard Accessories	Printer, 10L distilled water tank*1, 5L boric acid tank*1, 5L alkali solution tank*1, 20L waste liquid bucket*1, 1L titration solution bottle*1	Printer, 10L distilled water tank*1, 5L boric acid tank*1, 5L alkali solution tank*1, 20L waste liquid bucket*1, 1L titration solution bottle*1, Refrigeration cycle system*1
Packing Size(W*D*H)	960*600*1000mm	Main body: 960*600*1000mm Accessories: 700*440*610mm
Gross Weight	53kg	Main body: 55kg; Accessories: 30kg

Kjeldahl Digestion Furnace



Features:

- * This product adopts PID intelligent temperature control technology, which has good temperature uniformity and strong sample digestion consistency.
- * Adopting aviation industry coating technology, beautiful and durable.
- * LED display, with timing shutdown, alarm and other functions.
- * Stainless steel material has certain anti-corrosion ability.

Technical Parameters:

Model	BKD-8B
Temp. Range	RT~450℃
Temp. Precision	±1℃
Heating Pipe	Aluminium alloy pipe(Nichrome wire)
Heating Speed	8~15℃/min
Heating Holes	8
Aperture	Φ43.5mm
Digestion Tube Size	300ml±0.25ml
Consumption	2.1KW
Power Supply	AC220V, 50/60Hz
Package Size(W*D*H)	620*420*490mm
Gross Weight	23kg

Digester

Introduction:

Digester is a sample digestion and transformation equipment according to the classical wet digestion principle. It is mainly used in agriculture, forestry, environmental protection, geology and petroleum, chemical industry, food and other departments as well as universities and scientific research departments for the digestion of plants, seeds, feed, soil, ore and other samples before chemical analysis. It is the best supporting product of Kjeldahl nitrogen analyzer.



Features:

- * Aluminum alloy heating module surface using aviation industry coating technology, beautiful, durable, design temperature 450°C.
- * The temperature control system adopts 5.6 inch color touch screen, Chinese and English conversion, easy to operate.
- * Formula program input using table type fast input method, clear logic, fast speed, not easy to make mistakes.
- * 0~40 segment program can be arbitrarily selected and set.
- * Single point heating and curve heating modes are optional
- * Intelligent PID self-tuning temperature control of high precision, reliable and stable.
- * Electrical control system adopts solid state relay, quiet, anti-interference ability is strong.
- * Segmented power supply and power outage prevention restart function can avoid potential risks.
- * Equipped with over-temperature and over-pressure, over-current protection module.

Technical Parameters:

Model	BKD-10RL	BKD-15RL	BKD-20RL
Temp.Range	RT+5~450°C		
Temperature Accuracy	±1°C		
Capacity	10pcs	15pcs	20pcs
Digestive Tube	Glass tube 300ml*10	Glass tube 300ml*15	Glass tube 300ml*20
Aperture Diameter(mm)	Φ43.5		
Heating Block Material	6061 Aluminum alloy		
Rate of Heating	≈ 8~15°C /min		
Temperature Control System	1~40 segment program heating/single point heating dual mode		
Formula Management	9 groups		
Timed Shutdown	1~999min		
Display	5.5-inch color touch screen		
Power Supply	AC220V/50Hz		
Consumption	1.4KW	2.1KW	2.8KW
Package Size(W*H*D)mm	870*460*600	870*460*600	870*460*600
Net Weight(kg)	18	21	26
Gross Weight(kg)	24	28	34

Exhaust System Scrubber

Features:

- * This product is acid, alkali neutralization equipment with negative pressure pump, the air pump has large flow, long life and easy to use.
- * The three-stage absorption of lye and distilled water buffer ensures the reliability of gas exclusion.
- * The instrument is simple, safe and reliable to use.
- * The replacement of neutralization solution is convenient and easy to operate.



Technical Parameters:

Model	ES1B
Extraction Flow	18L / min
Air Extraction Interface	Φ8~10mm(Reducer fittings are available)
Alkaline Solution Bottle	1.7L
Distilled Water Bottle	1.7L
Alkali Concentration	10%~35%
Power Supply	AC220V/50Hz
Consumption	120W
Package Size (W*H*D)mm	470*480*450
Gross Weight (kg)	16.5

Gas Collection Hood



Features:

- * The sealing cover is made of polytetrafluoroethylene, resistant to high temperature, strong acid and alkali.
- * The collecting tube collects acid gas deep inside the tube with high reliability.
- * It is designed as a conical plus cap structure, and each seal cap weighs 35g.
- * Using gravity seal, sealing reliable and convenient.
- * The shell is welded with 316 stainless steel plate, which has good corrosion resistance.

Technical Parameters:

Model	GCH-08	GCH-10	GCH-15	GCH-20
Collecting Port	8	10	15	20
Air Extraction Port	1	1	2	2
Application	BKD-8B	BKD-10RL	BKD-15RL	BKD-20RL
Package Size(W*H*D)mm	350*260*260	350*260*260	350*260*260	350*260*260
Gross Weight(kg)	3	3	4	4.2

Ultrasonic Cleaner



Introduction:

Ultrasonic cleaner is a non-polluting, non-damaging, multi-purpose cleaning equipment. It not only has a powerful cleaning effect on objects with complex shapes, but also accelerates dissolution and emulsification. Ultrasonic cleaner has the unparalleled advantages of other physical cleaning or chemical cleaning, and is widely used in service industry, electronics industry, pharmaceutical industry, laboratory, machinery industry, cemented carbide industry, chemical industry and other fields.

Features:

- * Standard accessories: 1pc of soundproof cover, 1pc of basket, 1pc of PVC pipe.
- * The shell and inner cavity are made of 304 stainless steel, which is anti-corrosion.
- * LED display for UC-VAD series.

Technical Parameters:

Model	UC-18VAD	UC-24VAD	UC-36VAD	UC-48VAD	UC-60VAD
Capacity(L)	6.5	10	15	22.5	30
Ultrasonic Frequency	Double Frequency, 28/40kHz				
Time Range/ Heating Temperature	1-99min/RT~80℃				
Ultrasonic Power	180W	240W	360W	480W	600W
Heating Power	500W				
Power Supply	220V 50Hz				
Tank Size(mm)	300*150*150	300*240*150	330*300*150	500*300*150	500*300*200
External Size(mm)	330*180*310	330*270*310	360*330*310	530*330*310	530*330*350
Packing Size(mm)	440*280*355	440*360*355	475*415*380	640*415*380	640*415*425
Gross Weight(kg)	7	9	11	14	17

* Remark: VAD is based on the digital AD model and adds another frequency of 28khz.



Introduction:

Ultrasonic cleaner is a non-polluting, non-damaging, multi-purpose cleaning equipment. It not only has a powerful cleaning effect on objects with complex shapes, but also accelerates dissolution and emulsification. Ultrasonic cleaner has the unparalleled advantages of other physical cleaning or chemical cleaning, and is widely used in service industry, electronics industry, pharmaceutical industry, laboratory, machinery industry, cemented carbide industry, chemical industry and other fields.

Features:

- * Standard accessories: 1pc of soundproof cover, 1pc of basket, 1pc of PVC pipe.
- * The shell and inner cavity are made of 304 stainless steel, which is anti-corrosion.
- * LED display for UC-AD series.

Technical Parameters:

Model	UC-18AD	UC-24AD	UC-36AD	UC-48AD	UC-60AD
Capacity(L)	6.5	10	15	22.5	30
Ultrasonic Frequency	Single Frequency, 40kHz				
Time Range/ Heating Temperature	1-99min/RT~80℃				
Ultrasonic Power	180W	240W	360W	480W	600W
Heating Power	500W				
Power Supply	220V 50Hz				
Tank Size(mm)	300*150*150	300*240*150	330*300*150	500*300*150	500*300*200
External Size(mm)	330*180*310	330*270*310	360*330*310	530*330*310	530*330*350
Packing Size(mm)	440*280*355	440*360*355	475*415*380	640*415*380	640*415*425
Gross Weight(kg)	7	9	11	14	17

* Remark: The AD model is a digital power adjustable model, which adds a power adjustable function based on the digital model(D model).

Ultrasonic Cleaner



Introduction:

Ultrasonic cleaner is a non-polluting, non-damaging, multi-purpose cleaning equipment. It not only has a powerful cleaning effect on objects with complex shapes, but also accelerates dissolution and emulsification. Ultrasonic cleaner has the unparalleled advantages of other physical cleaning or chemical cleaning, and is widely used in service industry, electronics industry, pharmaceutical industry, laboratory, machinery industry, cemented carbide industry, chemical industry and other fields.

Features:

- * Standard accessories: 1pc of soundproof cover, 1pc of basket, 1pc of PVC pipe.
- * The shell and inner cavity are made of 304 stainless steel, which is anti-corrosion.
- * LED display for UC-D series.

Technical Parameters:

Model	UC-18D	UC-24D	UC-36D	UC-48D	UC-60D	UC-18J	UC-24J	UC-36J	UC-48J	UC-60J
Capacity (L)	6.5	10	15	22.5	30	6.5	10	15	22.5	30
Ultrasonic Frequency	Single frequency, 40 kHz									
Time Range/Heating Temp	1~99min/RT ~80℃					1~60min/RT ~80℃				
Ultrasonic Power (W)	180	240	360	480	600	180	240	360	480	600
Heating Power (W)	500									
Power Supply	AC220V, 50Hz									
Tank Size (mm)	300*150*150	300*240*150	330*300*150	500*300*150	500*300*200	300*150*150	300*240*150	330*300*150	500*300*150	500*300*200
External Size (mm)	330*180*310	330*270*310	360*330*310	530*330*310	530*330*350	330*180*310	330*270*310	360*330*310	530*330*310	530*330*350
Packing Size (mm)	430*250*350	430*340*350	460*400*400	640*400*400	640*400*400	430*250*350	430*340*350	460*400*400	640*400*400	640*400*400
Gross Weight (kg)	6	8	10	13	15	6	8	10	13	15

* Remark: The J model is a mechanical model, with the heating time and working time controlled by a knob.
 The D model is a digital model, with the heating temperature and working time controlled by a button.

Double Adjustable Frequencies Type



Features:

- * Over-voltage and over-current protection.
- * Standard: 1pc of basket, 1pc of lid.
- * Low-level water protection.
- * Fully microprocessor controlled and programmable.
- * Digital display, easy setting for time and temperature.
- * Time and temperature real-time display.
- * Standard Power Supply: AC220v±10%, 50/60Hz; 110V±10%, 60Hz (Except for UC-10SDII, UC-20SD, UC-20SDII, UC-30SD).

Technical Parameters:

Model	Capacity (L)	Adjustable Ultrasonic Frequency (KHz)		Time Range /Heating Temp	Ultrasonic Power(W)	Heating Power(W)	Tank Size L*W*H(mm)	Packing Size L*W*H(mm)	Gross Weight(kg)
UC-30SDG	13	45	80	1~480min /0~80℃	300	400	300*240*180	840*670*730	73
UC-50SD	27	45	80		500	800	500*300*180	1100*690*800	101
UC-60ST	27	45	80		600	800	500*300*180	1100*690*800	102
UC-70ST	27	45	80		700	800	500*300*180	1100*690*800	104
UC-20SD	6	45	80	1~480min /RT~80℃	200	400	300*150*150	445*250*430	9.5
UC-20SDII	8	45	80		200	400	300*150*180	500*350*480	15.5
UC-30SD	10	45	80		300	400	300*240*150	446*346*483	12.5
UC-30SDII	13	45	80		300	400	300*240*180	650*540*630	37

Single Frequency Type



UC-20SII



40KHz



UC-30SII/UC-50S/UC-60S/UC-70S



UC-10S/UC-20S/UC-30S

Introduction:

Ultrasonic cleaning is a process that uses, ultrasonic and an appropriate cleaning, solvent to clean items.

Features:

- * Standard: 1pc of basket, 1pc of lid.
- * Time and temperature real-time display.
- * Fully microprocessor controller and programmable.
- * Digital display, easy operation for time and temperature.
- * Low-level water protection (UC-20S, UC-20SII, UC-30S, UC-30SII, UC-50S, UC-60S, UC-70S).
- * Standard Power Supply: AC220V±10%, 50/60Hz; 110V±10%, 60Hz (Except for UC-10S, UC-20S, UC-20SII).

Technical Parameters:

Model	Capacity (L)	Ultrasonic Frequency	Time Range /Heating Temp	Ultrasonic Power(W)	Heating Power(W)	Tank Size L*W*H(mm)	Packing Size L*W*H(mm)	Gross Weight(kg)
UC-08A	1.3	40KHz	1~99min/20~80℃	60	200	150*140*65	260*260*260	2.5
UC-10A	2			60	200	150*140*100	260*260*290	3
UC-20A	3			120	200	240*135*100	350*260*330	4
UC-50A	14			300	400	300*240*200	430*370*430	9
UC-70A	19			420	600	330*300*200	460*430*430	11
UC-10S	4	80KHz	1~480min /RT~80℃	100	400	300*150*100	445*250*400	8.5
UC-20S	6			200	400	300*150*150	435*240*430	8.8
UC-20SII	8			200	400	300*150*180	505*355*495	13
UC-30S	10			300	400	300*240*150	446*346*463	12.1
UC-30SII	13		1~480min /0~80℃	300	400	300*240*180	840*670*730	75
UC-50S	27			500	800	500*300*180	1100*690*820	99
UC-60S	27			600	800	500*300*180	1100*690*820	101
UC-70S	27			700	800	500*300*180	1100*690*820	101

Three Adjustable Frequencies Type



UC-20ST/UC-20STII/UC-30ST



UC-30STII/UC-50STII/UC-60STII/UC-70STII



UC-100ST/UC-100STII/UC-200ST/UC-200STI

- Features:
- * Digital display, easy operation for time and temperature setting
 - * Fully microprocessor controlled
 - * Over-voltage and over-current protection
 - * Low-level water protection
 - * Standard basket and lid
 - * Power Supply: Standard of 220V 50/60Hz, optional of 110V 50/60Hz.

Technical Parameters:

Model	Capacity(L)	Ultrasonic Frequency (kHz)	Time Range /Heating Temp.	Ultrasonic Power (W)	Heating Power (W)	Tank Size: L*W*H (mm)	Packing Size: L*W*H (mm)	Gross Weight (kg)
UC-20ST	6	45 80 100	1~480min /RT~80℃	60	200	300*150*150	440*250*428	10.3
UC-20STII	8			200	400	300*150*180	540*330*500	14.7
UC-30ST	10			300	400	300*240*150	445*345*455	13.5
UC-30STII	13		1~480min /0~80℃	300	400	300*240*180	840*670*700	77
UC-50STII	27			500	800	500*300*180	1070*620*740	89
UC-60STII	27			600	800	500*300*180	1070*620*740	89
UC-70STII	27			700	800	500*300*180	1070*620*740	89
UC-100ST	72			1000	3000	600*300*400	/	/
UC-100STII	72			1000	3000	600*300*400	/	/
UC-200ST	160			2000	9000	800*500*400	/	/
UC-200STI	160			2000	9000	800*500*400	/	/

Air Volume Meter



BK-AVM-1



BK-AVM-1S

- Introduction:
- Air volume meters are designed for measuring air volume, temperature and humidity in HVAC ducts, HEPA outlets, FFUs, and laminar flow systems. They determine total room air volume for calculating air changes, while interchangeable hood sizes accommodate all types of supply and exhaust duct terminals.
- Features:
- * BK-AVM-1: Push-button LCD screen, BK-AVM-1S: LCD touch screen.
 - * BK-AVM-1: Nylon windproof fabric, BK-AVM-1S: Polyester fiber-specific fabric.
 - * A tripod is standard with the BK-AVM-1S but optional for the BK-AVM-1.
- Notice:
- Do not measure corrosive gases, gases containing metal particles, and gases containing large particles and high concentration of dust.

Technical Parameters:

Model		BK-AVM-1		BK-AVM-1S	
Air Volume	Range	100~3500m³/h			
	Accuracy	±5%(F•S)			
	Resolution	1m³/h			
Temp. Measurement	Range	/		0~60℃	
	Accuracy	/		±0.5℃	
	Resolution	/		0.1℃	
Humidity Measurement	Range	/		0~100%RH	
	Accuracy	/		±0.1%RH	
	Resolution	/		0.1%RH	
Power Supply	DC	8.4V			
	AC	100~240V, 50/60Hz			
Storage		Up to 1000 test results		Up to 5000 test results	
Standard Printer		Bluetooth printer			
Operating Environment		Temperature: 5~35℃ Relative Humidity: 30~70%RH			
Storage Environment		Temperature: -30~45℃ Relative Humidity: 0~70%RH			
Air Flow Hood		Standard: 570*570mm, 830*830mm			
Package Size(W*D*H)		650*650*200mm		650*650*200mm; 990*100*100mm	
Gross Weight		12kg		11kg; 3kg	

Shaker
 Decolorization Shaker



SK-D700
 Intelligent 3D Shaker



SK-R800
 Intelligent Rocking Shaker



SK-O900
 Intelligent Orbital Shaker



SK-L108
 Intelligent Linear Shaker

Introduction:

Decolorization shaker is widely used for the fixation of electrophoresis gel separation band, the oscillations of Coomassie blue staining and decolorization, the fixation, staining, development of silver nitrate staining, the development and fixing of X-ray film in the autoradiography experiment, further processing of cellulose film after electrophoretic transfer, the reaction and staining of antigen, molecular hybridization and cell culture, etc. The decolorizing shaker can be used in any experiment where the sample needs to be shaken in the solution.

It can be used in environmental monitoring, medical health, petrochemical, food, metallurgy, PCR laboratory preparation and preparation. It is suitable for laboratories of various colleges and universities, scientific research and production enterprises.

Features:

- * Molded natural rubber platform can effectively prevent the corrosion of the machine by accidentally overflowing acid and alkali solution, acid and alkali resistance, no deformation, beautiful and durable, easy to clean.
- * Easy to achieve timing, setting speed and continuous operation mode.
- * Intelligent speed control: microcomputer control of high-precision stepper/ brushless DC motor, intelligent feedback control, improving the control speed accuracy, and not affected by power supply voltage fluctuations.
- * Intelligent low speed start: gradual accelerate start, to avoid the sample liquid outward caused by sudden high-speed start, sample damage, while extending the life of mechanical parts.
- * With memory function in case of power-failure.
- * The operation is durable and stable, can work for more than 18 hours continuously.
- * Parameter modification online: the parameters can be modified in real time under the running state.
- * Overload protection: it will stop running when overloaded to ensure instrument life and safety.
- * LCD display, real-time display of all operating parameters.
- * The control system ensures smooth start-up, smooth acceleration, and uniform movement of the test sample.
- * The shape has a streamlined style and aesthetic design concept

Technical Parameters:

Model	SK-D700	SK-R800	SK-O900	SK-L108
Oscillation Mode	3D/universal motion	Swing up and down motion	Horizontal cyclotron motion	Linear reciprocating motion
Speed Range	10~100rpm		30~300rpm	30~240rpm
Speed Accuracy	±1rpm			
Amplitude	Inclination 9°	Up and down 25mm	Circumference Dia. 20mm	Circumference Dia. 30mm
Display	LCD Display			
Timing Range	0~99.59h		0~1999min	
Tray Size	320*320mm	280*280mm	320*320mm	
Max. Load	5kg			
Motor	High precision stepper motor		Brushless DC motor	
Consumption	AC100~240V, 50/60Hz			
External Size(W*D*H)	335*400*245mm	280*350*195mm	340*400*175mm	340*400*170mm
Net Weight	15kg	10kg	22kg	
Package Size(W*D*H)	518*456*365mm	470*398*300mm	518*456*365mm	
Gross Weight	18kg	13kg	25kg	

Decolorization Shaker



Features:

- * Molded natural rubber platform can effectively prevent the machine from being corroded by accidentally overflowing acid and alkali solutions. It is resistant to acids and alkalis, does not deform, is beautiful and durable, and easy to clean.
- * Intelligent speed control: A microcomputer-controlled brushless DC motor featuring intelligent feedback control, improves the accuracy of speed control and is not affected by power supply voltage fluctuations.
- * Intelligent low speed start: Gradual acceleration start to avoid sample liquid outward caused by sudden high-speed start, sample damage, while extending the life of mechanical parts.
- * With memory function in case of power-failure.
- * The operation is durable and stable, can work for more than 18 hours continuously.

Technical Parameters:

Model	SK-O900L	SK-L108L
Oscillation Mode	Horizontal circular	Linear reciprocating
Speed Range	30~240rpm	
Speed Accuracy	±1rpm	
Amplitude	30mm	
Display	LED Display	
Timing Range	0~99h60min	
Tray Size	240*230mm	
Max. Load	3kg	
Motor	Brushless DC motor	
Consumption	30W	
Power Supply	AC90~260V, 50/60Hz	
External Size(W*D*H)	270*295*160mm	
Net Weight	4.3kg	5.3kg
Package Size(W*D*H)	360*380*300mm	
Gross Weight	5.8kg	6.8kg

Table Top Shaker



Introduction:

The shaker has a simple and elegant appearance, various functions, and gentle vibration. It can be used for continuous shaking of petri dishes, flasks, erlenmeyer flasks, etc. It is suitable for aeration reactions and extraction applications. It can be used inside environmental test chambers or carbon dioxide incubators.

Features:

- * Oscillation speed: 50-500rpm
- * LED display, real-time display of time and speed
- * Selectable timing or continuous operation mode
- * Compact structure, small footprint
- * Driven by a brushless DC motor, quiet and stable operation
- * Maximum load capacity: 7.5 Kg (including fixtures)

Technical Parameters:

Model	BK-YC20
Display	LED Display
Speed Range	50~500rpm
Speed Accuracy	±1rpm
Amplitude	10mm
Oscillation Mode	Rotatory shaking
Timing Range	1min~99h99min
Tray Size	320*320mm, 1pc
Max. Load	7.5kg(including fixture)
Motor	Brushless DC motor
Standard Tray Configuration	Universal petri dish rack set, with rubber pads and 8 fixing ropes
Consumption	30W
Power Supply	AC100~240V, 50/60Hz
External Size(W*D*H)	365*355*142mm
Net Weight	17.5kg
Package Size(W*D*H)	480*480*250mm
Gross Weight	22kg

Table Top Shaker



Features:

- * Oscillating speed 30~300rpm.
- * LCD display real-time displays time and speed.
- * Timing or continuous operation mode are optional.
- * Compact structure and small footprint.
- * DC brushless motor drive, quiet and smooth operation.
- * With safe speed protection function.
- * A variety of fixtures are available.
- * Automatic running and stop, with parameter memory and speed storage function.
- * Equipped with DC brushless motor, long service life, maintenance free.
- * The oscillator starts slowly and accelerates smoothly to ensure the safety of the experimental sample.

Technical Parameters:

Model	BK-YC30
Display	LCD Display
Speed Range	30~300rpm
Speed Accuracy	±1rpm
Amplitude	26mm
Oscillation Mode	Rotatory shaking
Timing Range	1~999min
Tray Size	680*500mm, 1pc
Standard Capacity	250ml*24
Optional Capacity	250ml*24/500ml*18/1000ml*14/2000ml*7
Max. Capacity	100ml*49/250ml*36/500ml*24/1000ml*20/2000ml*12
Motor	Brushless DC motor
Consumption	100W
Power Supply	AC110~240V, 50/60Hz
External Size(W*D*H)	680*565*245mm
Net Weight	73kg
Package Size(W*D*H)	820*700*490mm
Gross Weight	83kg

Orbital and Linear Shaker

Introduction:

Digital orbital and linear shaker is suitable for mixing in culture dishes, flasks and beakers.



SK-O330-Pro/SK-L330-Pro



SK-O180-Pro/SK-L180-Pro

Features:

- * Double LCDs for independent display of time and speed.
- * Over speed detection and protection.
- * Different platforms and fixtures for selection.
- * Remote function provides PC control and data transmission.

Technical Parameters:

Model	SK-O330-Pro	SK-L330-Pro	SK-O180-Pro	SK-L180-Pro
Item No.	8032220100	8032120100	8032210100	8032110100
Oscillation Mode	Orbital	Linear	Orbital	Linear
Orbital Diameter	10mm	/	4mm	/
Amplitude	/	10mm	/	4mm
Max. Load(with attachment)	7.5kg		2.5kg	
Speed Range	100~500rpm	100~350rpm	100~800rpm	100~350rpm
Speed And Timer Display	LCD			
Time Range	1min~99h59min			
Operation Mode	Continuous/timed operation			
Working Environment	5~40°C, 80%RH			
Protection Type	IP21			
Connection Interface	RS232			
Motor Type	DC motor			
Motor Input	28W			
Motor Output	15W			
Consumption	30W			
Power Supply	AC100~240V, 50/60Hz			
Standard Accessory	1pc SK330.1 universal attachment		1pc SK180.1 universal attachment	
External Size(W*D*H)	370*420*100mm		300*340*100mm	
Package Size(W*D*H)	600*500*230mm(shaker)		450*450*170mm(shaker)	
	450*350*250mm(accessories)		450*350*260mm(accessories)	
Gross Weight	14kg(shaker), 2.5kg(accessories)		10kg(shaker), 3kg(accessories)	

Orbital Shaker



- Features:**
- * Electronic adjustment of speed and timer.
 - * Double LEDs for independent display of time and speed.
 - * Speed range of 40~200rpm.
 - * Fixed board face, max. load capacity is 2kg with platform.
 - * Continuous operation(endless).
 - * Electronic time switching clock: 1min~19h59min.
 - * Multifunctional model supports various accessories and has a wide range of applications.

Technical Parameters:

Model	SK-O180-S	
Type	Basic model	Multifunctional model
Item No.	8072210201	8072210300
Speed Range	40~200rpm	
Work Plate Dimension(W*D)	268*268mm	
Orbital Diameter	20mm	
Max. Load Capacity(With Platform)	2kg	
Display	LED	
Time Setting Range	1min~19h59min	
Motor Type	DC motor	
Protection Class	IP21	
Standard Accessory	Fixed tray	Universal attachment with 3 bars(18900025)
Consumption	20W	
Motor Input Consumption	20W	
Motor Output Consumption	16W	
Power Supply	AC100~240V, 50/60Hz	
External Size(W*D*H)	294*348*123mm	
Net Weight	3.1kg	
Packing Size(W*D*H)	425*360*205mm	
Gross Weight	3.9kg	



PP-1 Tray



PP-2 tray



PP-3 tray :12*100ml



PP-3 tray :6*250ml

Introduction:

Orbital Shaker is a high speed shaker with direct brushless DC motor and microprocessor controlled technique. It can be applicable in different laboratories: in microbiology, biotechnology, medical analysis, etc.

- Characteristics:**
- 1.LCD displays time and shaking speed.
 - 2.Easy to operate with one-touch knob.
 - 3.Warm root and variety of platforms can be chosen.
 - 4.When time control ends, instrument will make alarm voice.
 - 5.Gentle and reliable shaking with direct brushless DC motor.
 - 6.12-month warranty.

Technical Parameters:

Model	SK-O10
Shaking Motion	Orbital
Orbital Diameter	10mm
Time Range	1min~99h59min
Speed Range	50~300rpm
Capacity	PP-1 tray: 8pcs petri dishes PP-2 tray: 6*100ml or 4*250ml conical flask PP-3 tray:12*100ml or 6*250ml conical flask
Consumption	50W
Optional	PP-1, PP-2, PP-3
Power Supply	AC100V~240V 50/60Hz
External Size (W* D*H)	280*270*110mm
Net Weight	7.0kg
Package Size (W* D*H)	Main instrument with PP-1: 440*360*260mm; Main instrument with PP-2: 460*440*300mm; Main instrument with PP-3:460*440*300mm
Gross Weight	Main instrument with PP-1: 8.16kg; Main instrument with PP-2: 11.08kg; Main instrument with PP-3: 11.08kg

3D and Rocking Shaker



SK-D3309-Pro



SK-R330-Pro

Introduction:

The 3D and Rocking Shaker is a versatile laboratory instrument designed for gentle yet efficient mixing of samples in research, medical, and industrial applications. This shaker provides three-dimensional motion and rocking movement, making it ideal for staining, washing, hybridization, and general mixing tasks.

Features:

- * Double LCDs for independent display of time and speed.
- * Different platforms and fixtures for selection.
- * 3D shaker: gentle 3D motion with fixed angle 9°; Rocking shaker: smooth see-saw rocking motion with fixed angle 9°.
- * Wide range of platforms for use with a variety of vessels.

Technical Parameters:

Model	SK-D3309-Pro	SK-R330-Pro
Item No.	8032422100	8032322100
Oscillation Mode	3D orbital	See-saw rocking
Angle	9°	
Max. Load(With attachment)	5kg	10kg
Speed Range	10~70rpm	
Speed And Timer Display	LCD	
Time Range	1min~99h59min	
Operation Mode	Continuous/timed operation	
Working Environment	5~40°C, 80%RH	
Motor Input	IP21	
Connection Interface	RS232	
Motor Type	DC motor	
Motor Output	40W	
Protection Type	24W	
Consumption	50W	
Power Supply	AC100~240V,50/60Hz	
Standard Accessory	1 pc SK330.5 petri dish platform	
External Size(W*D*H)	360*430*106mm	360*410*200mm
Package Size(W*D*H)	540*490*380mm	540*490*380mm
Gross Weight	15.66kg	14kg

Optional Accessories:

Cat. No.	18900027	18900040	18900155	18900028	18900025	18900038	18900185	18900026
Model	SK330.1	SK330.3	SK330.5	SK330.2	SK180.1	SK180.3	SK180.4	SK180.2
Descriptions	Universal attachment with 4 bars	Lengthways roller attachment	Petri dish platform with non-slip mat and fixed string (8 pcs)	Fixing clip attachment	Universal attachment with 3 bars	Lengthways roller attachment	Petri dish platform with non-slip mat	Fixing clip attachment
	Size(W*D): 320*320mm	Size(W*D): 320*320mm	Size(W*D): 300*285mm		Size(W*D): 250*245mm	Size(W*D): 250*245mm	Size(W*D): 240*215mm	
Used with Shakers								
SK-R330-Pro	√	√	√	√	/	/	/	/
SK-D3309-Pro	√	√	√	√	/	/	/	/
SK-O330-Pro/ SK-L330-Pro	√	√	√	√	/	/	/	/
SK-O180-Pro/ SK-L180-Pro	/	/	/	/	√	√	√	√

Cat. No.	18900029	18900030	18900031	18900032	18900033	18900036	18900037	18900280
Descriptions	Fixing clip for flask volume 25ml, used with SK330.2 (56pcs)&SK 180.2 (36pcs)	Fixing clip for flask volume 50ml, used with SK330.2 (28pcs)&SK 180.2 (18pcs)	Fixing clip for flask volume 100ml, used with SK330.2 (28pcs) & SK180.2 (18pcs)	Fixing clip for flask volume 200ml/250ml, used with SK330.2 (13pcs) &SK180.2 (8pcs)	Fixing clip for flask volume 500ml, used with SK330.2 (9pcs) & SK180.2 (8pcs)	Bar for SK330.1 universal attachment	Bar for SK180.1 universal attachment	Connect sticks for double dishes shaker
Used with Shakers								
SK-R330-Pro	√	√	√	√	√	√	/	√
SK-D3309-Pro	√	√	√	√	√	√	/	√
SK-O330-Pro/ SK-L330-Pro	√	√	√	√	√	√	/	√
SK-O180-Pro/ SK-L180-Pro	√	√	√	√	√	/	√	√

Table Top Shaker

Feature:

- * Intelligent sound and light alarm, microprocessor controller.
- * The LCD display shows the set parameters and the measured parameters, which is easy to operate.
- * Running parameter memory function to avoid tedious operation.
- * DC brushless motor design, long service life and maintenance-free.
- * With the power-off memory function, the equipment can automatically resume operation according to the original set program after the external power supply suddenly loses power and then calls again.
- * The acceleration control circuit ensures that the oscillator starts slowly, accelerates smoothly, and ensures the safety of the experimental samples.



Technical Parameters:

Model	BJPX-SZ10		BJPX-SZ11
Oscillation Mode	Rotatory shaking		
Speed Range	30~300rpm		
Speed Accuracy	±1rpm		
Amplitude	26mm	50mm	
Display	LCD Display		
Timing Range	0~9999min/hour		
Tray Size	680*500mm		
Tray Number	1pc		
Flask Clamp	Default Capacity: 250ml*24 Standard Capacity: 24*250ml/18*500ml/14*1000ml/ 7*2000ml(Choose one of them) Max Capacity: 35*250ml/24*500ml/20*1000ml/12*2000ml		
Drive Mode	Single axis balanced drive type		
Curve Programming	Fixed value control speed		
Ambient Temp.	15~35℃		
Consumption	80W		
Power Supply	AC100~240V, 50/60Hz		
External Size(W*D*H)	680*570*290mm	680*570*300mm	
Net Weight	79kg	95.5kg	
Package Size (W*D*H)	700*760*470mm		
Gross Weight	101kg	117.5kg	

Optional Clamp:

Model		BJPX-SZ10	BJPX-SZ11
Triangular beaker Max. capacity (pcs)	100ml	48	
	250ml	35	
	500ml	24	
	1000ml	20	
	2000ml	12	
	3000ml	8	
Tube Rack (pcs)		4	
96-well Plates		18	
Clip-type Shaking Plate		2	

Note: This table is the maximum optional capacity, please choose according to your requirement.



Features:

- * The LCD display shows all the set parameters and actual measured parameters, and the operation is very simple.
- * DC brushless motors have a long service life and require no maintenance.
- * With the power-off recovery function, the equipment can automatically resume operation according to the original set program.
- * Equipped with an intelligent sound and light alarm environment scanning microprocessor controller.
- * Parameter memory function, avoiding cumbersome operations.

Technical Parameters:

Model	BJPX-SY10		BJPX-SY11
Oscillation Mode	Rotary shaking		
Speed Range	20~300rpm		
Speed Accuracy	±1rpm		
Amplitude	26mm	50mm	
Display	LCD display		
Timing Range	0~9999min/hour		
Tray Size	900*600mm		
Flask Clamp	500ml*24(Default)/250ml*35/1000ml*18/2000ml*12/3000ml*6/5000ml*6		
Drive Mode	Single axis balanced drive type		
Curve Programming	Fixed value control speed		
Ambient Temp.	15~35℃		
Consumption	150W		
Power Supply	AC220V, 50/60Hz		
External Size(L*W*H)	910*665*460mm		
Net Weight	130kg		
Packing Size(L*W*H)	1009*724*562mm		
Gross Weight	155kg		

Optional Clamp:

Model		BJPX-SY10	BJPX-SY11
Triangular Beaker Max. Capacity(pcs)	250ml	54	
	500ml	40	
	1000ml	24	
	2000ml	15	
	3000ml	6	
	5000ml	6	
Tube Rack(pcs)		5	
96-well Plate		36	
Clip-type Shaking Plate		2	

Optional shaker accessories



Tube Rack



Flask Clamp



Universal attachment with 3 bars



Microplate/96-well plate



Universal spring plate

Technical Parameters:

No.	Material Code	Name	No.	Specifications	Note
1	18.01.09.002	Flask Clamp	BS-A11	100ml	Suitable for BJPX-SZ10 BJPX-SZ11
2	18.01.09.005		BS-A14	250ml	Suitable for BJPX-SZ10 BJPX-SZ11
3	18.01.09.006		BS-A15	500ml	
4	18.01.09.007		BS-A16	1000ml	
5	18.01.09.008		BS-A17	2000ml	BJPX-SY10
6	18.01.09.009		BS-A18	3000ml	BJPX-SY11
7	18.01.09.010		BS-A19	5000ml	Suitable for BJPX-SY10 BJPX-SY11
8	18.01.09.011	Tube Rack	BS-A20	54*10ml	Suitable for BJPX-SZ10 BJPX-SZ11 BJPX-SY10 BJPX-SY11
9	18.01.09.012		BS-A21	54*15ml	
10	18.01.09.013		BS-A22	28*50ml	
11	18.01.09.014		BS-A23	24*100ml	
12	18.01.09.015		BS-A24	54-well, suitable for Φ15*150mm centrifuge tubes	
13	18.01.09.016		BS-A25	54-well, suitable for Φ18*180mm centrifuge tubes	
14	18.01.09.017		BS-A26	54-well, suitable for Φ20*200mm centrifuge tubes	
15	18.01.09.018		BS-A27	32-well, suitable for Φ25*200mm centrifuge tubes	
16	18.01.09.019		BS-A28	28-well, suitable for Φ30*200mm centrifuge tubes	
17	18.01.09.020		BS-A50	54*7ml	
18	18.01.09.021		BS-A51	54*10ml	
19	18.01.09.022		BS-A52	54*20ml	
20	18.01.09.023		BS-A53	54*30ml	
21	18.01.09.024	Microplate/96-well Plate	BS-A30	130*87*52mm	Suitable for BJPX-SZ10 BJPX-SZ11 BJPX-SY10 BJPX-SY11
22	18.01.09.025	Universal Attachment with 3 Bars	BS-A40	320*300*70mm	Suitable for BJPX-SZ10 BJPX-SZ11 BJPX-SY10 BJPX-SY11
23	23.02.09017	Universal Spring Plate	SZ10	682*502mm	Suitable for BJPX-SZ10 BJPX-SZ11
24	10.22.01.00912	Universal Spring Plate	SY10	900*600mm	Suitable for BJPX-SY10 BJPX-SY11

Table Top Shaker



SK-830F



SK-851/SK-871/SK-881F

Features:

- * Incoming call recovery function.
- * Equipped with high-quality servo motor, the control speed is accurate, the high and low speed performance is good, and the stability is strong.
- * Ultra-low speed start function, adjustable start speed.The speed-up control circuit is adopted to start slowly and accelerate steadily to ensure the safety of experimental samples.
- * Ultra-low speed start function, adjustable start speed.
- * The speed-up control circuit is adopted to start slowly and accelerate steadily to ensure the safety of experimental samples.
- * Open-type oscillation equipment, used for centralized temperature control within the same controlled greenhouse.

Technical Parameters:

Model	SK-851	SK-871	SK-830F	SK-881F
Oscillation Mode	Rotatory shaking		Reciprocating shaking	
Speed Range	20~300rpm/min	20~300rpm/min	20~260rpm/min	
Speed Accuracy	±1rpm			
Amplitude	Φ50mm	Φ26mm	0~50mm	
Controller	PID Controller			
Display	LCD Display			
Timing Range	0~9999h/min			
Drive Mode	Multidimensional drive		Track drive	
Tray Size	800*600mm	950*730mm	460*380mm	800*600mm
Tray Quantity	1pc			
Standard Capacity	1000ml*18	1000ml*30	250ml*16	1000ml*18
Max. Capacity (Flask clamp)	100ml*66 or 250m*48 or 500ml*33 or 1000ml*20 or 2000ml*12	250ml*80 or 500ml*53 or 1L*30 or 2L*20 or 3L*12	100ml*22 or 250ml*16 or 500ml*12	250ml*48 or 500ml*33 or 1000ml*20 or 2L*12 or 100ml*66
Max. Capacity (Sticky board)	250ml*48 or 500ml*32 or 1000ml*20 or 2000ml*12	250ml*71 or 500ml*53 or 1L*30 or 2L*20 or 3L*12	100ml*20 or 250ml*20 or 500ml*12	250ml*48 or 500ml*32 or 1000ml*20 or 2L*12
Consumption	200W	300W	80W	200W
Power Supply	AC220V±10%, 50/60Hz(Standard); 110V±10%, 60Hz(Optional)			
External Size(W*D*H)mm	900*650*600	1040*760*595	460*410*250	900*650*600
Net Weight	240kg	320kg	35kg	270kg
Package Size(W*D*H)mm	1050*800*795		600*480*335	1050*800*795
Gross Weight	260kg	340kg	40kg	290kg

Table Top Shaker



Features:

- * Ultra-low speed start function, the start speed is adjustable.
- * Restore function after power on.
- * Equipped with high-quality servo motor, the control speed is accurate, the high and low speed performance is good, and the stability is strong.
- * The speed-up control circuit is adopted to start slowly and accelerate steadily to ensure the safety of experimental samples.
- * Open-type oscillation equipment, used for centralized temperature control within the same controlled greenhouse.

Technical Parameters:

Model	SK-852	SK-872	SK-882F
Oscillation Mode	Rotatory shaking		Reciprocating shaking
Speed Range	20~300rpm	20~300rpm	20~260rpm
Speed Accuracy	±1rpm		
Amplitude	Φ50mm	Φ26mm	0-50mm
Controller	PID		
Display	LCD		
Timing Range	0~9999h/min		
Circulation Mode	Natural convection		
Drive Mode	Multi-dimensional drive		
Tray Size	800*600mm	950*730mm	800*600mm
Tray Quantity	2pcs		
Standard Capacity (Flask Clamps Qty)	250ml*46&1000ml*18	250ml*71&1000ml*30	250ml*46&1000ml*18
Optional Flask Clamps	100ml*132 or	250ml*160 or	250ml*96 or
	250ml*96 or	500ml*106 or	500ml*66 or
	500ml*66 or	1000ml*60 or	1000ml*40 or
	1000ml*40	2000ml*40 or 3000ml*24	100ml*132
Optional Sticky Board	250ml*96 or	250ml*142 or 500ml*106 or	250ml*96 or
	500ml*64 or	1000ml*60 or 2000ml*40 or	500ml*64 or
	1000ml*40	3000ml*24	1000ml*40
External Material	Cold-rolled steel with anti-bacterial powder coating		
Consumption	200W	300W	200W
Power Supply	220V±10%, 50/60Hz(Standard); 110V±10%, 60Hz(Optional)		
External Size(W*D*H)	900*650*900mm	1040*760*1050mm	900*650*900mm
Net Weight	250kg	380kg	280kg
Packing Size(W*D*H)	1110*800*1155mm		
Gross Weight	270kg	420kg	300kg

Table Top Shaker



- Applications:
- It is widely used in bacterial culture, fermentation, hybridization, biochemical reaction, enzyme and cell tissue research in the pharmaceutical industry. It has extensive and major applications in research and application fields such as medicine, biology, molecular science, pharmacy, food, and environment.
- Features:
- * Incoming call recovery function.
 - * Equipped with high-quality servo motor, the control speed is accurate, the high and low speed performance is good, and the stability is strong.
 - * Ultra-low speed start function, adjustable start speed. The speed-up control circuit is adopted to start slowly and accelerate steadily to ensure the safety of experimental samples.

Technical Parameters:

Model	SK-810
Controller	PID
Display	LCD
Shaking Mode	Rotatory shaking
Drive Mode	Unishaft drive
Rotating Speed	20-300rpm/min
Rotating Accuracy	±1rpm
Vibration Range	φ26mm
Timing Range	0-9999h/min
Shaking Plate Size	460*380mm
Standard Capacity	250ml*16
Max. Capacity(Flask clamp)	100ml*22 or 250ml*16 or 500ml*12
Max. Capacity(Sticky board)	100ml*20 or 250ml*20 or 500ml*12
Consumption	80W
Power Supply	AC220V±10%, 50/60Hz (Standard); 110V±10%, 50/60Hz (Optional)
External Size(W*D*H)	460*410*250mm
Package Size(W*D*H)	600*480*335mm
Gross Weight	40kg

Constant Temperature Incubator Shaker



BK-YC35



BK-CIS30

Application:

The constant temperature incubator shaker is a small desktop shaking incubator that combines the functions of thermostatic incubator and shaker.. It is widely used in biotechnology, microorganisms, medical analysis and other fields. Placement and fixation of containers such as test tubes.

Features:

- * Simple and easy-to-use man-machine interface, real-time display of all running information and setting information, convenient for users to observe the running status of the equipment.
- * Using DC brushless motor, low noise, little interference, maintenance-free.
- * Support the automatic pause function when the cover is opened.
- * Comes with temperature calibration function.
- * Built-in software and hardware double over-temperature protection device, more reliable use.

Technical Parameters:

Model	BK-YC35	BK-CIS30
Temperature Setting Range	0-60℃	
Temperature Control Range	RT+5-60℃	
Temperature Control Accuracy	≤±0.5℃(at 37℃)	
Timing Range	1min-99h99min/∞	1min-99h59min/∞
Module Temperature Uniformity	≤±0.5℃(at 37℃)	
Display Precision	0.1℃	
Rotation Speed Range	50-300rpm	50-250rpm
Horizontal Amplitude	20mm	
Heating Rate	≤15min(from 25 to 60℃)	≤20min(from 25 to 60℃)
Platform Size	230*230mm	350*350mm
Power	350W	600W
Power Supply	AC220/110V, 50/60Hz	
Packing Size(L*W*H)	410*510*460mm	760*620*680mm
Gross Weight	30Kg	58kg

Modules for BK-YC35:

Model	Tray Name	Description
YC35-P01	Universal spring plate	Universal tray(standard)
YC35-P02	5*250ml conical flask tray	250ml flask clamp
YC35-P03	9*100ml conical flask tray	100ml flask clamp
YC35-P04	10*50ml tube tray	50ml tube
YC35-P05	18*15ml tube tray	15ml tube
YC35-P06	96-well plates tray	Elisa plate or deep well plate
YC35-P07	Culture dish tray	Universal tray

Modules for BK-CIS30:

Model	Tray Name	Description
CIS30-T1	9*250ml conical flask tray	250ml conical flask
CIS30-T2	25*100ml conical flask tray	100ml conical flask
CIS30-T3	Universal tray	16pcs of culture dishes
CIS30-T4	Universal tray(spring clip)	Subject to actual samples(standard)

Wrist Action Shaker




- Features:**
- * The leakage current and overcurrent protection system ensures the safety of operators.
 - * It can accommodate containers with a diameter of up to 80mm. The load capacity on each side is 6 kilograms.
 - * Suitable for various containers such as test tubes, beakers, wide-mouth bottles, narrow-mouth bottles, distillation bottles, separating funnels, straight-mouth bottles, etc.
 - * It is made of 304 stainless steel.
 - * Reliable core components, such as servo motor etc.

Technical Parameters:

Model	SK-S810
Max Capacity	12*500ml or 8*1000ml
Display	5-inch high-definition LCD touchscreen
Shaking Motion	Angle oscillation type
Speed Range	50~600rpm
Speed Accuracy	±1rpm
Shaking Angel	3°/ 6°/ 9°/ 10°/ 12° (Choose any one)
Shaking Diameter	13.3cm
Time Range	0~9999s/m/h
Programming	30 user-written programs
Safety Function	Automatic operation, automatic stop, timed operation, clock display, call recovery, parameter memory, speed storage
Power Supply	AC220V±10%, 50/60Hz(Standard); AC110V±10%, 50/60Hz(Optional)
Consumption	400W
External Size(L*W*H)	360*410*310mm(Without arm); 970*410*310mm(With arm)
Packing Size(L*W*H)	520*460*480mm
Net Weight	50kg
Gross Weight	63kg

Mixer
Multi-Tube Vortex Mixer

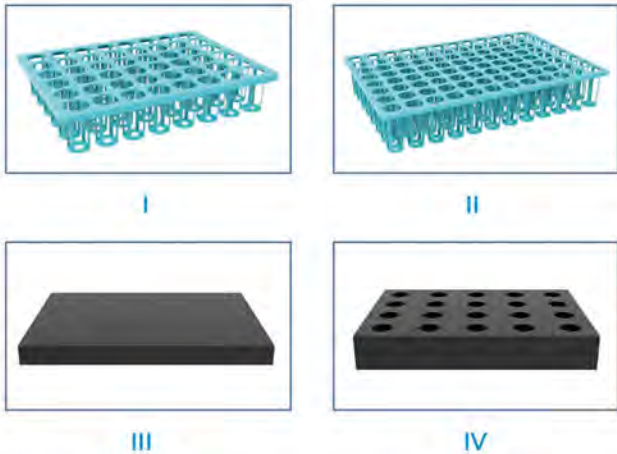

- Features:**
- * Up to 96 samples can be processed at one time, and the rotation speed can reach 2500rpm.
 - * Run time and pause time can be set.
 - * Configure various types of sponge test tube racks.
 - * Button-type jog mode, double switch design.
 - * Power-off memory function, saving setup time.
 - * Accelerates uniformly, effectively avoiding sample splashing.
 - * Three working modes of jog, continuous and intermittent pulse can be selected at will.
 - * LED display speed and time, simple operation panel, precise control by microprocessor.

Technical Parameters:

Model	BHY-2500
Speed Range	500~2500rpm
Speed Regulation Accuracy	±1rpm
Amplitude	4mm
Time Setting Range	1s~99h59min
Pulse Interval Timing Range	1s~99s
Pulse Operation Timing Range	1s~99min59s
Consumption	120W
Power Supply	AC100~240V, 50/60Hz
Standard Accessory	I, II, III, IV
External Size (L*W*H)	438*301*429mm
Package Size (W*D*H)	530*380*510mm
Gross Weight	27kg

Accessories:

Model	Pore Diameter	Compatible Type	Size
I	48-Well Virus Sampling Tube Rack	20ml or 30ml virus sampling tube	272*205*50mm
II	96-Well Virus Sampling Tube Rack	7ml or 10ml virus sampling tube 10ml or 15ml centrifuge tube	296*202*50mm
III	Replaceable Tray Pad	/	302*212*25mm
IV	Φ25~Φ29mm	50ml centrifuge tube	300*210*45mm

Multi-Tube Vortex Mixer




Features:

- * Mixing mode changes quickly.
- * LCD Integrated display.
- * High speed accuracy.
- * Suitable for a variety of test tube racks.
- * The appearance and operation interface are simple and beautiful.

Picture:



A1

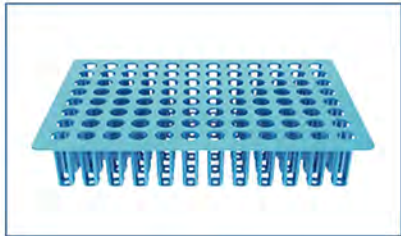

A2



A3



A4



A5




A6



A7



A8

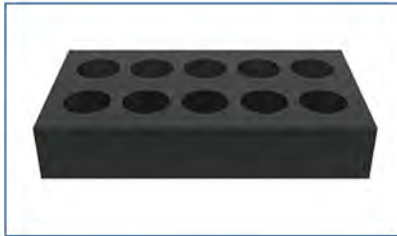

A9

Technical Parameters:

Model	BK-VX2800
Speed Range	300~2800rpm
Speed Regulation Accuracy	±1%
Amplitude	3mm
Time Setting Range	1s~99h59min
Pulse Interval Timing Range	1s~99s
Pulse Operation Timing Range	1s~999s
Max Loading	5.5kg
Consumption	70W
Power Supply	AC100~240V, 50/60Hz
Top Cover Size	310*210mm
External Size (L*W*H)	420*305*465mm
Net Weight	20kg
Package Size (W*D*H)	492*378*520mm
Gross Weight	23kg

Accessories:

Model	Specification	Compatible Tube Type	Hole NO.	Size
Standard				
A1	Replaceable tray mat	/	/	305*204*50mm
A2	Φ17mm plastic test tube rack	96*10ml virus sampling tube can be placed	96	294*200*50mm
A3	Φ26mm plastic test tube rack	Can put 20 mixed 1 virus sampling tube rack	48	280*214*53mm
A4	Φ16mm plastic test tube rack	Can put 10ml/15ml centrifugal tube	50	245*132*45mm
A5	Φ29mm plastic test tube rack	50ml centrifuge tube	15	245*132*45mm
Optional				
A6	Φ10mm(Φ12mm) sponge test tube rack	/	50	245*132*45mm
A7	Φ13mm sponge test tube rack	/	50	245*132*45mm
A8	Φ13mm sponge test tube rack	/	15	245*132*45mm
A9	Φ13mm sponge test tube rack	/	10	245*132*45mm

Vortex Mixer



Application:

Used for liquid, liquid-solid, solid (powder) mixing, the vortex mixer can mix any liquid and powder in the form of whirlpool. The mixing speed is fast, uniform, thorough. Widely used in environmental monitoring, medical and health, petrochemical, food, metallurgy, PCR laboratory, scientific research and production enterprises laboratory, laboratory, for mixing, extraction and biological, biochemical, cell, strain and other sample oscillation culture.

Features:

- * The shell is made of high-quality ABS material, beautiful and atmospheric.
- * New type of DC brushless motor, stepless adjustment, low noise and long effect.
- * Digital display to ensure the accuracy of time and speed.
- * Time and speed adjustment response is fast, saving experiment time.
- * Solid and reliable workmanship, excellent shock absorption, suitable for high-speed operation.
- * A variety of models and accessories are available.

Technical Parameters:

Model	BJPX-VW
Speed/Accuracy	200-3000rpm/ ±5rpm
Timing	0-9999 min/s
Amplitude Range	4mm
Oscillation Mode	Circular motion
Working Mode	Point vibration, continuous
Control Form	Pressure sensing
Power	35W
Power Supply	100~240V, 50/60Hz
Packing Size	280mm*230mm*210mm
Gross Weight	7.1kg

Accessories Technical Parameters:

Type	Item No.	Mode	Max Speed	Max Test Tube Size	Pictures	Standard/Optional
Test tube platform	XW001	Point vibration, continuous	3000rpm	Suitable for test tubes of different sizes		Standard
Flat bottom container platform	XW002	Point vibration, continuous	3000rpm	Container bottom size≤Φ80mm		Optional
Test tube holder: 19*10mm	XW003	Continuous	2000rpm	Applicable to 19 test tubes with an outer diameter of 10mm		Optional
Test tube holder: 13*12mm	XW004	Continuous	2000rpm	Suitable for 13 test tubes with an outer diameter of 12mm		Optional
Test tube holder: 12*15mm	XW005	Continuous	1400rpm	Suitable for 12 test tubes with outer diameter of 15mm		Optional
Test tube holder: 7*20mm	XW006	Continuous	1400rpm	Applicable for 7 test tubes of 20mm outer diameter		Optional
Test tube holder: 4*26mm	XW007	Continuous	1400rpm	Suitable for 4 test tubes with outer diameter of 26mm		Optional
Microplate tray	XW008	Continuous	1000rpm	Suitable for microplate with an outer dimension of 128mm*86mm		Optional
Test tube holder tray	XW009	/	/	Suitable for fixing test tube holder XW003-XW007		Optional

Vortex Mixer



Application:

Used for liquid, liquid-solid, solid (powder) mixing, the vortex mixer can mix any liquid and powder in the form of whirlpool. The mixing speed is fast, uniform, thorough. Widely used in environmental monitoring, medical and health, petrochemical food, metallurgy, PCR laboratory, scientific research and production enterprises laboratory, laboratory, for mixing, extraction and biological, biochemical, cell, strain and other sample oscillation culture.

Features:

- * The shell is made of high-quality sprayed steel plate, beautiful and atmospheric.
- * New type of DC brushless motor, stepless adjustment, low noise and long effect.
- * Digital display to ensure the accuracy of time and speed.
- * Time and speed adjustment response is fast, saving experiment time.
- * Solid and reliable workmanship, excellent shock absorption, suitable for high-speed operation.
- * A variety of models and accessories are available.

Technical Parameters:

Model	BJPX-VW1
Speed	0~3000rpm
Accuracy	±5rpm
Amplitude Range	4mm
Oscillation Mode	Circular motion
Motor Type	Dc brushless motor
Working Mode	Point vibration, continuous
Control Form	Knob + switch
Rotation Control	Stepless speed regulation
Base	High-quality carbon steel plate with electrostatic powder coating
Working Environment	Temperature: 4~40°C; humidity: ≤80%
Consumption	35W
Power Supply	AC100~240V, 50/60Hz
External Size	110*110*130mm
Net weight	2 kg
Package size	170*170*170mm
Gross weight	2.4 kg

Accessories Technical Parameters:

Type	Item No.	Mode	Max Speed	Max Test Tube Size	Pictures	Standard/Optional
Test tube platform	XW001	Point vibration, continuous	3000rpm	Suitable for test tubes of different sizes		Standard
Flat bottom container platform	XW002	Point vibration, continuous	3000rpm	Container bottom size≤Φ80mm		Optional

Vortex Mixer



Introduction:

The Mini Vortex Mixer is suitable for oscillating and mixing various samples such as reagents, solutions, and chemical substances. It is especially suitable for oscillating and mixing samples in small containers (50mL centrifuge tubes). This instrument is compact in size and is particularly suitable for small or crowded laboratories. It is mainly applicable in research fields such as medicine, bioengineering, chemical laboratories, and factory testing laboratories. It has a remarkable mixing effect and causes no contamination or impact on the substances inside the test tubes.

Features:

- * Small and beautiful, easy to pick up with one hand, weighing only 0.4kg.
- * Equipped with a brushless DC motor, featuring 6-stage stepless speed regulation with a maximum speed of 3500rpm.
- * Offers both momentary and continuous operation modes for selection.
- * The outer shell is made of engineering plastic, which is resistant to chemical corrosion.
- * Anti-slip foot pads at the bottom provide strong grip and ensure stable operation.

Technical Parameters:

Model	BK-VX5S
Speed	0~3500rpm
Amplitude Range	4.5mm
Oscillation Mode	Circular motion
Motor Type	Dc brushless motor
Mixing Capacity	50ml
Working Mode	Point vibration
Control Form	Knob switch
Rotation Control	6-speed stepless speed regulation
Rotational Speed Indication	Gear position indicator light
Base	Zinc alloy base
Working Environment	Temperature: 5~40°C; humidity: ≤80%
Power Supply	AC100~240V, 50/60Hz
Standard Accessory	Bowl adapter
External Size (W*D*H)	100*90*70mm
Package Size (W*D*H)	195*124*105mm
Net Weight	0.4kg
Gross Weight	0.6kg

Vortex Mixer



BK-VX1



BK-VX2

Accessories:



Bowl adapter
50ml tube



Flat type adapter
500ml or 250ml
beaker



Tray type adapter
9*50ml Centrifuge
tube



60 micro tube plate
0.5ml micro tube*30,
1.5ml micro tube*30



Microplate adapter
96-well microtiter
plate



Tray type adapter
11*50ml Centrifuge
tube

Introduction:

The structure of the vortex mixer is simple and reliable, and the instrument has the characteristics of small size, low power consumption, and low noise. It is widely used in biochemistry, genetic engineering, medicine and other fields. It can quickly mix any liquids and powders you need to mix in a high-speed vortex, and the mixing speed is fast, uniform and thorough.

Features:

- * Shaded pole motor, stepless speed regulation, maximum speed 2800rpm. (for BK-VX1)
- * Eccentric bearing design, cycloid mixing, uniform and fast mixing.
- * Suction cup machine feet, suitable for high-speed work.
- * A variety of vibration module adapters to choose from, suitable for a variety of containers.
- * Jog and continuous operation modes are available.

Technical Parameters:

Model	BK-VX1	BK-VX2
Shaking Mode	Orbital	
Orbital Diameter	4mm	
Motor Type	Shaded pole motor	
Speed Range	0~2800rpm	2800rpm(Fixed)
Operation Mode	Jog, continuous, adjust the speed	Jog, continuous
Rotation Control	Stepless speed regulation	Not adjustable
Power Consumption	40W	
Working Environment	Temperature: 5-40℃; Humidity: ≤80%	
Power Supply	AC220V, 50/60Hz; 110V, 50/60Hz	
Standard Accessory	Bowl adapter, Flat type adapter	Bowl adapter
Optional Accessory	60 micro tube plate, Microplate adapter, Tray type adapter (9*50ml or 11*50ml)	Flat type adapter
External Size (W*D*H)	152*152*185mm	
Package Size (W*D*H)	250*230*220mm	
Gross Weight	3.8kg	

Vortex Mixer



Features:

- * Touch operation or continuous mode.
- * Variable speed control from 0 to 3000rpm (MX-S).
- * Fixed Speed 3000rpm (MX-F).
- * Used for various mixing applications with optional adapters (MX-S).
- * Specially designed vacuum suction feet for body stability.
- * Robust aluminum-cast construction.
- * When the test tube adapter or flat gasket accessory is selected, it must be matched with VY1.2 or VT1.3.

Accessories for MX-S:

 Cat. No: 18900034 VT1.1 Standard top for <Ø30mm tubes and small vessels	 Cat. No: 18900505 VT1.3 Universal top plate Ø 100mm, used with tube adapters.	 Cat. No: 18900020 VT1.3.1 tube adapter for 48 holes test tubes, Ø6mm, used with VT1.3/ VT1.2	 Cat. No: 18900021 VT1.3.2 tube adapter for 15 holes test tubes, Ø10mm, used with VT1.3/ VT1.2	 Cat. No: 18900022 VT1.3.3 tube adapter for 12 holes test tubes, Ø12mm, used with VT1.3/ VT1.2
 Cat. No: 18900023 VT1.3.4 tube adapter for 8 holes test tubes, Ø 16mm, used with VT1.3/ VT1.2	 Cat. No: 18900024 VT1.3.5 tube adapter for 8 holes test tubes, Ø20mm, used with VT1.3/ VT1.2	 Cat. No: 18900043 VT1.3.6 Platform pad for <Ø99mm tubes and small vessels	 Cat. No: 18900158 VT1.3.7 Rubber vacuum suction foot	 Cat. No: 18900044 VT1.2 Tube holding rod used with tube adapters

 Cat. No:18900395 VT1.3.8 Tube adapter, for 24 holes test tubes, Ø10mm (1.5-2mL), used with VT1.3/ VT1.2/PS1.1	 Cat. No:18204185 VT1.3.9 PCR tube adapter, for use with VT1.3/VT1.2, 56-well, PCR-8Strips, (0.1ml-0.5ml), used with VT1.3/ VT1.2/PS1.1	 Cat. No:18900855 VT1.3.10 Tube adapter, for 4 holes test tubes, Ø28mm (50mL), used with VT1.3/ VT1.2/PS1.1	 Cat. No:18900862 VT1.3.11 Tube adapter, 12 holes XØ9.8mm+12 holesXØ6.6mm+12 holesXØ5mm(1.5/2.0/0.5/0.2mL), used with VT1.3/ VT1.2/PS1.1
 Cat. No:18900875 VT1.3.12 Large Platform Multi-Specimen Test Tube Adapter, 44 holesXø5mm+55 holesXø6.6mm+30 holes Xø9.8mm(1.5/2.0/0.5/0.2mL), used with VT1.3/ VT1.2/PS1.1	 Cat. No:18204342 PS1.0 Microplate clamp (Suitable for MX-S/MX-F)	 Cat. No:18204566 VT1.4 Ampule/Tube Attachment, 4pc ampule/ tube(0.2mL-15mL)	 Cat. No:18204561 VT1.5 Erlenmeyer flask attachment(100mL-250ml), Operating speed: 0~1500rpm

Technical Parameters:

Model	MX-S	MX-F
Item No.	8031102000	8031101000
Shaking Mode	Orbital	
Orbital Diameter	4mm	
Motor Type	Shaded pole motor	
Motor Input	58W	
Motor Output	10W	
Speed Range	0~3000rpm	0~3000rpm
Speed Display	Scale	/
Operation Mode	Continuous/touch operation	
Ambient Temp.	5-40℃	
Relative Humidity	80%RH	
Protection Type	IP20	
Power Consumption	60W	
Power Supply	AC110/220V±10%, 50/60Hz (Customizable)	
Standard Accessories	VT1.1 Standard top	
External Size(W*D*H)	127*130*160mm	
Package Size(W*D*H)	290*240*220mm	
Gross Weight	3kg	

Optional Accessories:

Accessories	MX-S (0~2500rpm)	
	Touch Mode (High Speed Area)	Continuous Mode (Low Speed Area)
VT1.1	Standard	Standard
VT1.2 + VT1.3.1	Optional	/
VT1.2 + VT1.3.2	Optional	/
VT1.2 + VT1.3.3	Optional	/
VT1.2 + VT1.3.4	Optional	/
VT1.2 + VT1.3.5	Optional	/
VT1.3 + VT1.3.6	Optional	/
VT1.3 + VT1.3.1	/	Optional
VT1.3 + VT1.3.2	/	Optional
VT1.3 + VT1.3.3	/	Optional
VT1.3 + VT1.3.4	/	Optional
VT1.3 + VT1.3.5	/	Optional

Application of accessories:

Cat. No.	P/N	Cat. No.	P/N
18900034	VT1.1	18900043	VT1.3.6
18900044	VT1.2	18900158	VT1.3.7
18900505	VT1.3 + VT1.3.7	18900395	VT1.3.8
18900020	VT1.3.1	18204185	VT1.3.9
18900021	VT1.3.2	18900855	VT1.3.10
18900395	VT1.3.8	18900862	VT1.3.11
18900022	VT1.3.3	18900875	VT1.3.12
18900023	VT1.3.4	18204342	PS1.0
18900024	VT1.3.5	18204566	VT1.4
		18204561	VT1.5

Vortex Mixer



VM25



VM25D

Introduction:
 Vortex mixer is widely used in experiments related to biochemistry, genetic engineering, radio immunology, and other fields that involve liquid-liquid, liquid-solid, and solid-solid(powder) mixing. It is capable of rapidly mixing any required liquids or powders in a high-speed vortex-like motion.

- Features:**
- * Simple and reliable structure, compact instrument size, low power consumption, and low noise.
 - * Fast, uniform, and thorough mixing speed.
 - * Low-speed stability, high-speed strength.
 - * Stable operation, low rotational speed deviation, long service life.

Technical Parameters:

Model	VM25	VM25D
Item No.	8086111000	8086113000
Function	Mixing/oscillation/stirring	
Speed	2800rpm	Low range: 1300rpm High range: 2800rpm
Orbital Diameter	4mm	
Shaking Mode	Orbital	
Adapter	Platform shaker	Platform shaker/microplate clamp
Run Type	Continuous	
Consumption	30W	
Power Supply	AC110V±10%, 50/60Hz or AC220V±10%, 50/60Hz	
Packing Size(W*D*H)	580*410*560mm	
Gross Weight	19.2kg	

Mini Vortex Mixer



- Features:**
- * Compact and portable, fits well on desktops, wipeable surfaces, and workbenches.
 - * Touch operation with a fixed speed of 3000rpm for quick sample mixing.
 - * Uses a powerful and efficient 12V DC brushless motor, ensuring smooth operation and long service life.
 - * Foot pad design keeps the mixer stable during operation and prevents shaking.

Technical Parameters:

Model	MX-Mini
Item No.	4076001000
Speed	3000rpm(Fixed)
Shaking Mode	Orbital
Orbital Diameter	4.8mm
Motor Type	DC brushless motor
Operation Mode	Touch
Protection Class	IP21
Consumption	12W
Rated Motor Output Consumption	10W
Power Supply	AC100~240V, 50/60Hz
External Size(W*D*H)	100*100*79mm
Net Weight	0.5kg
Packing Size(W*D*H)	290*240*220mm
Gross Weight	1kg

Roller Mixer



BK-RX6



BK-RX6F

Introduction:

Roller mixer is used for mixing blood samples, viscous substances and liquid-solid suspensions, prevention of blood coagulation and immune precipitation etc.

Features:

- * Rocking and Rolling modes for good mixing.
- * LCD displays running speed and timing time.
- * Electronic setting speed and timing time, more correct control.
- * Adjustable speed, maximum speed up to 100rpm.
- * Six roller design, suitable for a variety of sample tubes.
- * Timed or continuous operation mode.

Technical Parameters:

Model	BK-RX6	BK-RX6F
Mixing Mode	Rocking & Rolling	
Speed Range	10-100 rpm	
Rocking Amplitude	24mm	
Number of Roller	6 pcs	
Roller Length	280mm	
Max. Loading Weight	4Kg	
Operation Mode	Continuous	Continuous or timing
Speed Display	Scale	LCD
Timer	/	Yes
Timer Display	/	LED
Timing Range	/	1min~9999min
Motor Type	Brushless DC motor	
Applicable Specifications	Dia.6-34mm	
Consumption	25W	30W
Power Supply	AC100~240V, 50/60Hz	
Product Size (W*D*H)	468*250*102mm	
Packing Size (W*D*H)	531*312*186mm	
Net Weight	4kg	4.2kg
Gross Weight	5.5kg	5.5kg



MX-T6-S



MX-T6-Pro

Introduction:

Roller mixer is used for mixing blood samples, viscous substances and liquid-solid suspensions, prevention of blood coagulation and immune precipitation etc.

Features:

- * LCD display indicates the speed and time for MX-T6-Pro.
- * Speed range of 10-70rpm.
- * Six roller design for gentle rolling and easy to clean.

Technical Parameters:

Model	MX-T6-S	MX-T6-Pro
Item No.	8011312000	8031312100
Mixing Mode	Rocking & Rolling	
Speed Range	0~70 rpm	10~70 rpm
Rocking Amplitude	24mm	
Number of Roller	6 pcs	
Roller Length	280mm	
Max. Loading Weight	4kg	
Timing Range	/	1~1199min
Operation Mode	Continuous	Continuous or timing
Speed Display	Scale	LCD
Timer	/	Yes
Timer display	/	LCD
Motor Type	Brush DC motor	Brushless DC motor
Ambient Temp.	5-40℃	
Relative Humidity	80%RH	
Protection Type	IP21	
Power Consumption	25W	30W
Power Supply	AC100~240V,50/60Hz	
External Size(W*D*H)	450*250*100mm	
Package Size(W*D*H)	585*380*235mm	
Gross Weight	5kg	5kg

Microplate Mixer



MX-M
With microplate clamp



MX-M
With universal top plate and a tube adapter

Features:

- * A wide range of speed from 0 to 1500rpm.
- * Used for various mixing applications with optional adapters.
- * Maintenance-free brushless DC motor.
- * When the test tube adapter is selected, it must be matched with PS1.1.

Accessories:



Cat. No:18204340
PS1.2 Single well plate tray kit, Microplate clamp (Suitable for MX-M) (Standard)



Cat. No:18900043
VT1.3.6 Platform pad, for <Ø99mm tubes and small vessels



Cat. No: 18900067
PS1.1 Universal top plate(round), used with tube adapters



Cat. No: 18900020
VT1.3.1 tube adapter for 48 holes test tubes, Ø6mm (0.5ml), used with PS1.1



Cat. No: 18900021
VT1.3.2 tube adapter for 15 holes test tubes, Ø10mm (1.5~2.0ml), used with PS1.1



Cat. No: 18900022
VT1.3.3 tube adapter for 12 holes test tubes, Ø12mm (2~7ml), used with PS1.1



Cat. No: 18900023
VT1.3.4 tube adapter for 8 holes test tubes, Ø16mm (4~15ml), used with PS1.1



Cat. No: 18900024
VT1.3.5 tube adapter for 8 holes test tubes, Ø20mm (20ml), used with PS1.1



Cat. No:18900395
VT1.3.8 Tube adapter, for 24 holes test tubes, Ø10mm, used with VT1.3/ VT1.2/PS1.1



Cat. No:18204185
VT1.3.9 PCR tube adapter, for use with VT1.3/VT1.2/PS1.1, 56-well, PCR-8Strips, 0.1ml-0.5ml



Cat. No:18900855
VT1.3.10 Tube adapter, for 4 holes test tubes, Ø28mm (50mL), used with VT1.3/ VT1.2/PS1.1



Cat. No: 18204341
PS1.3 Double microplate clamps (Suitable for MX-M)



Cat. No:18900875
VT1.3.12 Large Platform Multi-Specimen Test Tube Adapter, 44 holesXØ5mm+55 holesXØ6.6mm+30 holesXØ9.8mm, used with VT1.3/ VT1.2/PS1.1



Cat. No:18900862
VT1.3.11 Tube adapter, 12XØ9.8mm+12XØ6.6mm+12XØ5mm (1.5/2.0/0.5/0.2mL), used with VT1.3/ VT1.2/PS1.1

Technical Parameters:

Model	MX-M
Item No.	8031202000
Shaking Mode	Orbital
Orbital Diameter	4.5mm
Max. Shaking Weight(With attachments)	0.5kg
Motor Type	Brushless DC motor
Motor Input	18W
Motor Output	10W
Speed Range	0~1500rpm (single microplate) ; 0~1000rpm (double microplate)
Speed Display	Scale
Ambient Temp.	5~40℃
Relative Humidity	80%RH
Protection Type	IP21
Power Consumption	20W
Power Supply	AC100~240V, 50/60Hz
Standard Accessories	18204340
External Size(W*D*H)	260*150*80mm
Package Size(W*D*H)	470*250*240mm
Gross Weight	3kg

Rotating Mixer



BK-RD20



MX-RD-E



MX-RD-Pro

Features:

- * Display of speed and time(BK-RD20 and MX-RD-Pro).
- * Adjustable mixing angle from 0 to 90°(BK-RD20 and MX-RD-Pro).
- * Material of the plate: Carbon steel spraying(BK-RD20); Stainless steel with oxidation coating(MX-RD-E); Stainless steel(MX-RD-Pro).
- * Material of the clip: Plastic (MX-RD-E); Stainless steel(BK-RD20 and MX-RD-Pro).
- * Speed range from 10 to 100rpm(BK-RD20). Speed range from 10 to 70rpm (MX-RD-Pro). Adjustable speed range from 0 to 80rpm(MX-RD-E).
- * A wide variety of accessories are available.

Accessories for BK-RD20:



Stainless steel clip
 Cat No.: 27833, for 1.5ml~2ml centrifuge tube
 Cat No.: 27832, for 10ml~15ml centrifuge tube
 Cat No.: 27831, for 50ml~100ml centrifuge tube



Cat No.: 00577
 1.5ml*60



Cat No.: 00578
 15ml*16



Cat No.: 00579
 50ml*8

Accessories for MX-RD-Pro: (Only 18900162 is standard accessory)



Stainless steel clip
 Cat No.: 18900196, for 1.5ml centrifuge tube
 Cat No.: 18900197, for 15ml centrifuge tube
 Cat No.: 18900198, for 50ml centrifuge tube



Cat No.: 18900160
 Type 1 plate
 60*1.5ml centrifuge tube



Cat No.: 18900161
 Type 2 plate
 16*15ml centrifuge tube



Cat No.: 18900162
 Type 3 plate
 8*50ml centrifuge tube



Cat No.: 18900140
 Plate support rods
 4pcs in a group, use with plates

Technical Parameters:

Model	BK-RD20	MX-RD-E	MX-RD-Pro
Item No.	/	8031412000	8031412100
Speed Range	10~100rpm	0~80rpm	10~70rpm
Inclining Angle Range	0°~90°	/	0°~90°
Timing Range	1~9999min	/	1~1199min
Operation Mode	Continuous or Timing	Continuous	Continuous or Timing
Display	LED	Scale	LCD
Motor Type	Brushless DC motor	DC motor	
Ambient Temp.	5~40°C		
Relative Humidity	≤80%RH		
Protection Type	/	IP21	
Consumption	30W	20W	40W
Power Supply	AC100~240V, 50/60Hz		
Standard Accessories	00577 or 00578 or 00579	18900327 and 18900328 and 18900329	
External Size(W*D*H)	250*280*332mm	220*300*310mm	210*280*300mm
Package Size(W*D*H)	370*340*420mm	425*320*415mm	620*300*370mm
Gross Weight	7kg	5kg	7kg

Vertical Rotating Mixer



BK-RL20



MX-RL-E



MX-RL-Pro

Features:

- * Electronic adjustment of speed and time(BK-RL20 and MX-RL-Pro).
- * Display indicates the speed and time for BK-RL20 and MX-RL-Pro.
- * Speed range from10 to 100rpm(BK-RL20), speed range from10 to 70rpm (MX-RL-Pro), adjustable speed range from 0 to 80 rpm(MX-RL-E).
- * Material of the tube holder: Stainless steel with oxidation coating(MX-RL-E), Stainless steel(BK-RL20 and MX-RL-Pro).
- * Material of the clip: Plastic(MX-RL-E), Stainless steel(BK-RL20 and MX-RL-Pro).
- * Three clip sizes are selectable, suit for the tubes: 1.5ml, 15ml, 50ml.
- * A wide variety of accessories are available.

Accessories for BK-RL20:



Stainless steel clip
 Cat No.: 27833, for 1.5ml~2ml centrifuge tube
 Cat No.: 27832, for 10ml~15ml centrifuge tube
 Cat No.: 27831, for 50ml~100ml centrifuge tube



Cat No.: 00580
 1.5ml*32



Cat No.: 00583
 15ml*24



Cat No.: 00581
 1.5ml*48



Cat No.: 00584
 50ml*16



Cat No.: 00582
 15ml*16



Cat No.: 00585
 50ml*24

Accessories for MX-RL-Pro: (18900147 or 18900145 can be selected as the standard accessory)



Stainless steel clip
 Cat No.: 18900196, for 1.5ml centrifuge tube
 Cat No.: 18900197, for 15ml centrifuge tube
 Cat No.: 18900198, for 50ml centrifuge tube



Cat No.: 18900142
 For 48*1.5ml centrifuge tube
 Held horizontally



Cat No.: 18900145
 For 32*1.5ml centrifuge tube
 Held vertically



Cat No.: 18900143
 For 24*15ml centrifuge tube
 Held horizontally



Cat No.: 18900146
 For 16*15ml centrifuge tube
 Held vertically



Cat No.: 18900144
 For 24*50ml centrifuge tube
 Held horizontally



Cat No.: 18900147
 For 16*50ml centrifuge tube
 Held vertically

Technical Parameters:

Model	BK-RL20	MX-RL-E	MX-RL-Pro
Item No.	/	8031402000	8031402100
Speed Range	10~100rpm	0~80rpm	10~70rpm
Timing Range	1~9999min	/	1~1199min
Operation Mode	Continuous or timing	Continuous	Continuous or Timing
Display	LED	Scale	LCD
Motor Type	Brushless DC motor	DC motor	Brushless DC motor
Ambient Temp.	5~40°C		
Relative Humidity	≤80%RH		
Protection Type	/	IP21	
Consumption	30W	20W	40W
Power Supply	AC100~240V, 50/60Hz		
Standard Accessories	00580 or 00581 or 00582 or 00583 or 00584 or 00585	18900327 and 18900328 and 18900329	
External Size(W*D*H)	523*237*285mm	530*150*190mm	510*220*260mm
Package Size(W*D*H)	615*330*380mm	620*300*370mm	620*300*370mm
Gross Weight	8.5kg	3kg	9kg

Stirrer
 Hotplate Magnetic Stirrer



Features:

- * Digital temperature control, maximum temperature up to 120°C
- * The maximum speed of stepless speed regulation can reach 2600rpm
- * DC brushed motor, low noise, stable speed regulation
- * The stirring bar is made of fluorine material and high-quality magnetic steel, which has the characteristics of high temperature resistance, wear resistance, chemical corrosion resistance and strong rotation force.
- * Mixing work can be carried out in a sealed container, and the reference is simple and convenient
- * The appearance is simple and beautiful, the body is exquisite and compact, light in weight, and does not occupy the laboratory space

Technical Parameters:

Model	BK-MS120
Motor Type	DC brushed motor
Control Temp. Range	RT-120°C
Stirring Speed	0-2600rpm, stepless
Stirring Power	5W
Heating Power	250W
Temp. Display	LED
Timing Range	0-120min
Heating Platform Material	Stainless Steel
Platform Size	φ125mm
Max Capacity	3L
Ambient Temp. &Humidity	5-40°C, <80%
Power Supply	AC100~240V, 50~60Hz
External Size	240*180*110mm
Net Weight	1.8kg
Packing Size	310*260*180mm
Gross Weight	2.4kg



Features:

- * The maximum speed can reach 1600rpm
- * Stainless steel ceramic coated work plate is extremely chemical resistant
- * The external temperature sensor PT1000 can be connected to accurately control the sample temperature, and the temperature control accuracy can reach ±0.5°C
- * LED display shows temperature and speed in real time
- * Safety circuit design, automatic power off when the heating plate is overheated, to protect the safety of the laboratory
- * PID precise speed regulation, smoother speed up process, more precise speed control
- * The appearance is simple and beautiful, the body is exquisite and compact, light in weight, and does not occupy the laboratory space

Technical Parameters:

Model	BK-MS280	BK-MS340
Motor Type	DC brushless motor	
Control Temp. Range	RT-280°C	RT-340°C
Stirring Speed	150-1600rpm	
Stirring Power	5W	
Heating Power	550W	600W
Temp. Display	LED	
Rotation Display	LED	
Heating Platform Material	Stainless steel with ceramic coating	
Platform Size	φ135mm	
Max Capacity	3L	
Temp. Sensor	PT1000	
Ambient Temp. &Humidity	5-40°C, <80%	
Power Supply	100-240V 50/60Hz	
External Size	280*175*105mm	
Net Weight	3.4kg	
Packing Size	360*260*180mm	
Gross Weight	4kg	

Hotplate Magnetic Stirrer



Features:

- * Digital temperature control with a maximum temperature of 400°C.
- * The maximum rotation speed can reach 2000 rpm.
- * The working plate with an aluminum die cast ceramic coated surface is highly resistant to chemical corrosion.
- * It can be externally connected to a PT1000 temperature sensor to precisely control the sample temperature, with a temperature control accuracy of ±0.2°C.
- * The LED display screen shows the temperature and rotation speed in real-time.
- * Safety circuit design: automatic power cut-off when the heating plate overheats to protect laboratory safety.
- * PID precise speed regulation ensures a smoother acceleration process and more accurate speed control.
- * Simple and aesthetic appearance, compact and delicate body, light weight, and it does not take up much laboratory space.

Technical Parameters:

Model	BK-MS400
Motor Type	DC brushless motor
Control Temp. Range	RT~400°C
Stirring Speed	150~2000rpm
Stirring Power	36W
Heating Power	650W
Temp. Display	LED
Rotation Display	LED
Heating Platform Material	Aluminum disc ceramic coating
Platform Size	165*165mm
Max Capacity	20L
Temp. Sensor	PT1000
Ambient Temp.&Humidity	Temperature: 5~40°C; humidity: ≤80%
Consumption	700W
Power Supply	AC100~240v, 50/60Hz
Exteral Size(W*D*H)	175*285*116mm
Packing Size(W*D*H)	360*260*180mm
Net Weight	4.5kg
Gross Weight	5.4kg



MS-H-10



MS-H-11

Features:

- * Built-in temperature control system.
- * The temperature and rotation speed can be accurately set through the digital display screen, and the temperature control range is wide.
- * Rubber feet support, more stable.
- * Configure temperature sensor PT100.
- * With relay over temperature protection alarm, safe and convenient.

Technical Parameters:

Model	MS-H-10	MS-H-11
Working Plate Size	180*180mm	φ150mm
Platform Material	Ceramic	Aluminum
Motor Type	DC brushless motor	
Number of Stirring Points	1	
Maximum Stirring Volume (water)	5L	
Stirrer Maximum Size	50mm	
Rotation Range	20-2000r/min	
Data Display	LED	LCD
Timing Range	0~9999min	
Heating Temperature Range	Room temperature~360.0°C	
Overheating Protection	360~400°C adjustable	
Temperature Display Accuracy	±0.1°C	
External Temperature Sensor	PT100 (accuracy ±0.6C) (Standard)	
Speed Control Accuracy	±10rpm	±1rpm
Protection Class	IP21	
Motor Power	20W	
Input Power	800W	400W
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz	
External Size (L*W*H)	222*320*135mm	222*320*122mm
Net weight	4.2kg	3.9kg
Packing Size	300*410*210mm	
Gross Weight	7.6kg	6.0kg

Hotplate Magnetic Stirrer



Features:

- * The heating plate is treated with ceramic, which is corrosion-resistant, easy to clean and has a long service life.
- * Use brushless DC motor; low noise and long life
- * The stirrer adopts high-temperature resistant and strong magnet.
- * The body is made of high-quality materials and the polymer high-temperature-resistant shell is durable.

Technical Parameters:

Model	BJPX-SC10-2
Disk Material	Aluminum disc ceramic coating
Working Surface Size	170*170mm
Motor Type	Brushless DC motor
Maximum Mixing Capacity	3L
Rotation Range	0-2000rpm
Temperature Control Range	RT-100℃
Temperature Display Resolution	0.1℃
Temperature Control Resolution	1℃
Temperature Sensor	PT100 (Standard)
Heating Power	360W
Motor Power	5W
Power Supply	Standard: 220V/50Hz; optional:110V 60Hz
Machine Size (mm)	305*176*120
Net Weight (kg)	2.5
Packing Size (mm)	370*240*180
Gross Weight (kg)	3.2



Features:

- * Use ceramic heating plate, corrosion-resistant, easy to clean, long service life
- * Use brushless DC motor; low noise and long life
- * The stirrer adopts high temperature resistance and strong magnetism.
- * The body is made of high-quality materials and the polymer high-temperature-resistant shell is durable.
- * With timing, forward and reverse, locking and other functions

Technical Parameters:

Model	BJPX-SC11-Pro
Disk Material	Ceramic coated aluminum disc
Working Surface Size	φ140mm
Motor Type	Brushless DC motor
Maximum Volume	5L
Rotation Range	100-1500rpm
Display	LED
Temperature Control Range	RT-300℃
Temperature Control Method	PID control
Temperature Display Resolution	0.1℃
Temperature Control Accuracy	±1℃
Temperature Sensor	PT100 (Standard)
Waste heat high temperature alarm	>50℃
Heating Power	300W
Motor Power	9W
Power Supply	AC100-230V 50/60Hz
Timing Range	0-99h59min
Machine Size (mm)	250*150*95
Net Weight (kg)	1.3
Packing Size (mm)	300*200*150
Gross Weight (kg)	2.2

Hotplate Magnetic Stirrer



Features:

- * Maximum heating temperature of 380°C.
- * Maximum stirring capacity of 2L.
- * Maximum stirring speed of 2000rpm.
- * Efficient diversion platform and waterproof design to prevent liquid from entering the machine and corroding electronic components.
- * Corrosion-resistant all-metal shell with excellent heat dissipation performance and reliable fire protection capabilities.
- * Aluminium plate surface for fast heat conduction.
- * Temperature and speed indicators for monitoring operational status.

Technical Parameters:

Model	MS4-H380-E
Item No.	8010116015
Work Plate Size	120*120mm
Work Plate Material	Aluminum
Speed Range	0~2000 rpm
Heating Temperature Range	RT+5°C~380°C
Max. Stirring Quantity(H ₂ O)	2L
Max. Magnetic Bar(Length)	50mm
Protection Class	IP21
Motor Type	DC brush motor
Standard Accessories	PT1000-A, temperature sensor(18901898); support clamp of PT1000(18902044)
Motor Rating Ouput Consumption	5W
Heating Consumption	200W
Consumption	205W
Power Supply	AC110V±10%, 50/60Hz or AC220V±10%, 50/60Hz
External Size(W*D*H)	235*140*90mm
Net Weight	1.4kg
Packing Size(W*D*H)	310*300*150mm
Gross Weight	2.5kg

Hotplate Magnetic Stirrer



Features:

- * Aluminum cover with ceramic coating, strong corrosion resistance, easy to clean.
- * Efficient diversion platform and slope to prevent liquids from entering the machine and corroding electronic components.
- * Maximum heating temperature of 380°C, maximum stirring speed of 1500rpm, and maximum stirring volume of 20L[H₂O]
- * LCD displays speed, time, and temperature parameters clearly and intuitively.
- * Can be connected to an external temperature sensor PT1000 for precise control of sample temperature.
- * Protection features: dry burn protection, over-current protection, ground fault protection, and over-temperature protection.
- * Residual heat warning function: when the disc surface temperature exceeds 50°C, heating will shut off, and the screen will flash "HOT" as a reminder of the high temperature, even if the power is turned off, the display will still flash "HOT."

Technical Parameters:

Model	MS7-H380-E
Item No.	8010122115
Work Plate Size	184*184mm
Work Plate Material	Aluminum cover with ceramic coating
Speed Range	80~1500rpm
Display	LCD
Temperature Range	RT~380°C Increment 1°C
Max. Stirring Quantity (H ₂ O)	20L
Max. Magnetic Bar(Length)	80*10mm
Heating Liquid Temperature Control	±1°C(<100°C)
Accuracy	±1%(>100°C)
Overheating Temperature Protection	410°C
External Temperature Sensor	PT1000(accuracy±0.2°C)
Standard Accessories	PT1000-A, temperature sensor(18901898); support clamp of PT1000(18902044)
Consumption	900W
Power Supply	AC110V±10%, 60Hz or AC220V±10%, 50Hz
Protection Class	IP21
External Size(W*D*H)	366*240*126mm
Net Weight	3.5kg
Packing Size(W*D*H)	420*395*185mm
Gross Weight	4.6kg

Hotplate Magnetic Stirrer



MYP11-2



MYP11-2A



SH05-3G



X85-2



X85-2S

Technical Parameters:

Model	MYP11-2	MYP11-2A	SH05-3G	X85-2	X85-2S
Work Plate Size	φ145mm		φ175mm	φ145mm	
Work Plate Material	Aluminum alloy		Stainless steel	Aluminum alloy	
Max. Stirring Capacity	5L		10L	5L	
Motor Type	Brushless DC motor				
Motor Output	15W			10W	
Speed Range	0~1500rpm				
Digital Display	Speed, temperature, time			/	Speed
Control	Button	Knob + Button	Button	Knob	
Heating Output	600W		800W	600W	
Heating Temp. Range	RT~320℃		RT~250℃	50~300℃	
Temp. Accuracy	±0.5℃		±1℃	/	
Timing Range	1~9999min		1~250min	/	
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V, 50/60Hz		AC220V, 50Hz		
External Size(W*D*H) mm	280*160*90		330*190*130	250*150*135	
Package Size(W*D*H) mm	380*300*190		430*330*230	360*290*240	
Gross Weight(kg)	4.5		7	6	



MS7-H550-Pro

MS7-H550-S

MS-H-ProA

MS-H-Prot
(with timer)

MS-H-S

MS-H280-Pro

Technical Parameters:

Model	MS7-H550-Pro	MS7-H550-S	MS-H-ProA	MS-H-Prot	MS-H-S	MS-H280-Pro
Item No.	8030122111	8030122211	8060221110	8030201110	8030211010	8030101212
Work Plate Size	184*184mm (7 inch)		φ135mm (5 inch)			
Work Plate Material	Glass ceramic		Aluminum	Stainless steel with ceramic coated		
Max. Stirring Capacity	20L	10L	20L			3L
Motor Type	Brushless DC motor	Shaded pole motor	Brushless DC motor			
Motor Input	18W	15W	18W			5W
Motor Output	10W	1.5W	10W			3W
Speed Range	100~1500rpm	0~1500 rpm	100~1500rpm		0~1500rpm	200~1500rpm
Speed Display	LCD	Scale	LCD		Scale	LED
Speed Display Accuracy	±1rpm	/	±1rpm		/	
Heating Output	1000W		600W	500W		
Heating Temp. Range	RT-550℃, increment 1℃	RT-550℃, increment 5℃	RT-340℃, increment 1℃		RT~340℃	RT-280℃, increment 1℃
Control Temp. Accuracy	±1℃(<100℃) ±1%(>100℃)	±10℃	±1℃(<100℃) ±1%(>100℃)		/	±1℃(<100℃) ±1%(>100℃)
Overheating Protection	580℃		420℃			320℃
Temp. Display	LCD	LED	LCD		Scale	LED
Display Temp. Accuracy	±0.1℃	±1℃	±0.1℃		/	±1℃
Timing Range	/		1~99h59min		/	
Optional Accessory	PT1000 (accuracy ±0.2℃)				/	PT1000 (accuracy ±0.2℃)
Residual Heat Warning	50℃				/	50℃
Max. Stirrer Bar Length	80mm					50mm
Interface	RS232	/	RS232		/	/
Protection Type	IP21					IP42
Working Environment	5-40℃, 80%RH					
Power Consumption	1050W	1030W	720W	550W	530W	515W
Power Supply	AC110/220V±10%, 50/60Hz (Customizable)					
External Size(W*D*H)	215*360*112mm		160*280*100mm			
Package Size(W*D*H)	490*350*260mm		470*250*240mm			300*240*220mm
Gross Weight	7kg		4kg		3.5kg	3kg

Hotplate Magnetic Stirrer

Features of BS-2H/3H:

- * Cast Aluminum with surface spraying plate.
- * Max. Temp.: 380℃, max. speed: 2000rpm.
- * Heating and stirring can proceed simultaneously.
- * Heating power and stirring speed is steplessly adjusted.



BS-2H



BS-3H

Features of BS-4H/4HC:

- * Ceramic plate.
- * PT100 sensor is standard for BS-4HC.
- * With the adjustable rack and stirrer bar.
- * Max. Temp.: 380℃, max. speed: 2000rpm.
- * Heating and stirring can proceed simultaneously.
- * Heating power and stirring speed is steplessly adjusted.
- * Enclosed hot plate with flame protection, fast warm-up and durability.



BS-4H



BS-4HC

Technical Parameters:

Model	BS-2H	BS-3H	BS-4H	BS-4HC
Work Plate Size	120*120mm	170*170mm	190*190mm	
Plate Load(kg)	3	10		
Work Plate Material	Cast Aluminum with surface spraying		Ceramic	
Max. Stirring Capacity	2L	5L		
Speed Range	100~2000rpm		200~2000rpm	
Heating Temp	380℃			350℃
Power Consumption	180W	500W	600W	
Power Supply	AC110/220V±10%, 50/60Hz			
Standard Accessory	Adjustable rack, stirrer bar; PT100 sensor (only for BS-4HC)			
External Size(W*D*H) mm	200*120*90	265*185*190	320*190*125	
Package Size(W*D*H) mm	250*180*120	280*210*220	390*240*230	
Net Weight(kg)	1.9	2.2	5	
Gross Weight(kg)	3	3.4	6	

Magnetic Stirrer



Introduction:

Magnetic Stirrer has a reliable design and a powerful stirring ability. It is a basic and ideal tool for electrochemistry measurements or water & environment monitoring; drug or food analysis; liquid culture mixing, etc.

Features:

- * Compact design with small footprint, 12 V voltage available for mobile labs.
- * Square work plate supports 2.0 L stirring capacity.
- * Default PET top provides excellent chemical resistance.
- * Maintenance free brushless DC motor.
- * An economical choice of a reliable & durable magnetic stirrer.

Technical Parameters:

Model	Ecostir-E
Speed Range	300~2000rpm
Work Plate Size	120*115mm
Work Plate Material	PET
Max. Stirring Quantity(H ₂ O)	2L
Motor Type	Brushless DC Motor
Max. Magnetic Bar(Length)	40mm
Speed Setting	Scale
Protection Class	IP21
Motor Output Consumption	1.2W
Consumption	8W
Power Supply	AC100~240V, 50/60Hz
External Size(W*D*H)	150*144*54mm
Net Weight	0.3kg
Packing Size(W*D*H)	320*210*150mm
Gross Weight	0.85kg

Magnetic Stirrer



Features:

- * Stepless speed regulation, the maximum speed can reach 2600rpm
- * Using DC brush motor, low noise and stable speed regulation
- * The stirrer is made of fluorine material and high-quality magnetic steel. It has the characteristics of high temperature resistance, wear resistance, chemical corrosion resistance and strong rotation force.
- * The mixing work can be carried out in a sealed container, and the use is simple and convenient.
- * Simple and beautiful appearance, exquisite and compact, light weight, does not occupy laboratory space

Technical Parameters:

Model	BK-ST1
Motor Type	DC brushed motor
Maximum Volume	2L
Rotation Range	0-2600rpm stepless speed regulation
Timing Range	0-120min
Working Plate Size	Diameter 125mm
Stirring Power	5W
Power Supply	100-120/200-240V 50-60Hz
Overall Dimensions(mm)	240*180*110
Net Weight(kg)	1.7kg
Packing Size(mm)	330*265*197
Gross Weight(kg)	2.5

Mini Magnetic Stirrer



Features:

- * Mini and compact, light weight, easy to carry, easy to operate
- * Dc brushless motor, low noise for long-term operation
- * High performance strong magnetic mixer, strong magnetic force is not easy to jump
- * The body adopts ABS+PC alloy material, stable and durable, bevel design, better visual effect
- * The machine adopts excellent ergonomic design, the interface is simple and easy to operate
- * The maximum mixing capacity can reach 3L

Technical Parameters:

Model	BJPX-SC11-MN
Disk Material	ABS+PC
Working Surface Size	φ130mm
Motor Type	Brushless DC motor
Stirring Point	1
Maximum Mixing Volume	3L
Maximum Length of Stirrer	40mm
Speed Display	LED display
Set Precision	10rpm
Range of Rotation	200-2000rpm
Timing Function	0~99h59min/continuous
Rated Power	5W
Power Supply	AC 100-220V 50/60Hz
External Size	140*46*162mm
Net Weight	0.3kg
Packing Size	270*88*215mm
Gross Weight	0.6kg

Magnetic Stirrer



Features:

- * Using brushless DC motor, the maximum speed can reach 2000rpm
- * Strong magnetic force, uniform stirring, the maximum stirring volume can reach 20L
- * Intelligent digital display for easy reading
- * The stirrer is made of fluorine material and high-quality magnetic steel. It has the characteristics of wear resistance, chemical corrosion resistance and strong rotation force.
- * Simple operation (knob type operation), easy to complete the experiment

Technical Parameters:

Model	BK-ST20L
Motor Type	DC brushless motor
Maximum Volume	20L
Rotation Range	50-2000rpm
Working Plate Size	262*200mm
Stirring Power	36W
Power Supply	100-240V 50/60Hz
Overall Dimensions(mm)	285*220*91
Net Weight(kg)	2.65
Packing Size(mm)	360*260*180
Gross Weight(kg)	3.5



MS-S



MS-PA



MS-PB

Technical Parameters:

Model	MS-S	MS-PA	MS-PB
Work Plate Size	Ø135mm (5 inch)		
Item No.	8030211000	8030284200	8030294000
Work Plate Material	Stainless steel with ceramic coated	Nylon + GF	
Max. Stirring Capacity	20L	3L	
Motor Type	Brushless DC motor		
Motor Input	18W	5W	
Motor Output	10W	3W	
Speed Range	0~1500rpm		
Speed Display	Scale	LED	Scale
Max. Stirrer Bar Length	80mm	50mm	
Working Environment	5~40°C, 80%RH	10~40°C, 80%RH	5~40°C, 80%RH
Protection Type	IP21	IP42	
Power Consumption	30W	15W	10W
Power Supply	AC110~240V, 50/60Hz		
External Size(W*D*H)	160*280*85mm	150*260*80mm	
Package Size(W*D*H)	470*250*240mm	300*240*220mm	
Gross Weight	3kg	3kg	

Magnetic Stirrer



98-2



H03-A



85-1



85-2A



90-1



90-1B



96-1



H01-2

Technical Parameters:

Model	98-2	H03-A	85-1	85-2A	90-1	90-1B	96-1	H01-2
Work Plate Material	Stainless steel							
Max. Stirring Capacity	10L		3L	5L	20L		50L	
Motor Type	Brushless DC motor							
Speed Range	0~2000rpm		0~1500rpm	0~2000rpm	0~2000rpm		0~1400rpm	
Digital Display	/	Speed	/	/	/	Speed	/	Speed
Control	Knob							
Motor Power	15W		8W	10W	40W		100W	
Power Supply	220V, 50Hz							
External Size(W*D*H)mm	260*160*85	210*210*85	210*130*65	245*145*100	305*300*105		410*400*115	
Package Size(W*D*H)mm	450*300*250	400*400*250	400*260*215	380*300*220	510*430*250		550*550*220	
Gross Weight(kg)	8	7.5	5.5	7.5	10		20	

Multi-position Magnetic Stirrer



Features:

- * Six positions with the same speed, high synchronization rate, maximum speed up to 1600rpm.
- * DC brushless motor has low noise, high reliability and maintenance-free.
- * Strong magnetic force, stable mixing, maximum mixing capacity is 1L*6.
- * Special coated disk surface, anti-scratch, corrosion resistance, pattern positioning
- * The stirrer is made of fluorine material and high-quality magnetic steel. It has the characteristics of high temperature resistance, wear resistance, chemical corrosion resistance and strong rotation force.
- * LED display, real-time display speed and time.
- * Double knob control, with parameter memory function, simple operation, easy to complete the experiment.

Technical Parameters:

Model	BK-ST6
Motor Type	DC brushless motor
Maximum Volume	1L*6
Rotation Range	50~1600rpm
Timing Range	0~99h59min
Working Plate Size	369*269mm
Ambient Temp.	5~40℃
Ambient Humidity	80%
Stirring Power	25W
Power Supply	AC110~220V, 50/60Hz
External Size(L*W*H)	370*353*121mm
Net Weight	4.85kg
Package Size(L*W*H)	492*382*219mm
Gross Weight	6.3kg



MS-M-S10



MS-H-S10



84-1(4 positions)



524G



84-1(6 positions)



H01-1D

Technical Parameters:

Model	MS-M-S10 (8030140013)	MS-H-S10 (8030140000)	84-1 (4 positions)	84-1 (6 positions)	524G	H01-1D
Work Plate Size	180*450mm		290*280mm	420*300mm	φ145mm	
Work Plate Material	Stainless steel with silicone coating	Stainless steel covered with silicone cushion	Stainless steel		Aluminum alloy	Stainless steel
Max. Stirring Capacity	0.4L*10	0.4L*10	1.5L*4	1.5L*6	3L*4	3L*6
Motor Type	Brushless DC motor					
Speed Range	0~1100rpm		0~1500rpm		0~1400rpm	0~1500rpm
Digital Display	/		Speed		Speed, Temperature, Time	
Control	Scale		Knob		Button	Knob
Heating Output	/	470W	/		4*600W	6*360W
Heating Temp. Range	/	RT~120℃	/		RT~150℃	
Working Environment	5~40℃, 80%RH					
Power Supply	AC110/220V±10%, 50/60Hz		220V, 50Hz			
External Size(W*D*H)	622*205*65mm	182*622*65mm	290*280*80mm	420*300*80mm	380*380*145mm	1005*230*130mm
Package Size(W*D*H)	700*420*270mm		540*350*180mm	670*380*180mm	520*520*240mm	1130*400*270mm
Gross Weight	7.5kg		8kg	12kg	15kg	35kg

Multi-position Hotplate Magnetic Stirrer



- Features:**
- * Independent control for channels 2, 4 and 6, with the maximum speed reaching up to 1500 rpm.
 - * DC brushless motors have low noise, high reliability and no maintenance requirements.
 - * Precise temperature control and stable stirring.
 - * Aluminum heating plate, ceramic coating, resistant to high temperatures and corrosion.
 - * LED display screen, showing real-time temperature and speed.
 - * Two knobs for control, simple operation, and easy to complete the experiment.

Technical Parameters:

Model	BK-MS300-S2	BK-MS300-S4	BK-MS300-S6
Position	2	4	6
Working Plate Size	Φ140mm*2	Φ140mm*4	Φ140mm*6
Temperature Control Range	RT~300℃		
Temperature Control Accuracy	±1℃		
Speed Range	200~1500rpm		
Hot Plate Material	Aluminum heating plate+ceramic coating		
Motor	Brushless DC motor		
Temp. Sensor	PT1000		
Display	LED		
Temperature Control Method	PID control		
Waste Heat High Temperature Alarm	>50℃		
Heating Consumption	640W	1280W	1920W
Motor Input Consumption	18W	36W	54W
Power Supply	AC220V, 50/60Hz; AC110V, 50/60Hz		
External Size(W*D*H)	320*236*95mm	640*256*95mm	960*256*95mm
Net Weight	3.9kg	7.8kg	11.5kg
Packing Size(W*D*H)	380*310*150mm	700*310*150mm	1020*310*150mm
Gross Weight	5kg	9kg	13kg

Overhead Stirrer



- Features:**
- * Color LCD with backlight displays speed and time in real time, with 3 sets of speed memory functions, convenient for accurate reading and easy operation.
 - * Accurately control the speed with a control accuracy of ±3RPM; accurately display the true value/set value of the speed
 - * Constant rotation speed, automatic adjustment of torque according to changes in sample viscosity
 - * Prevent sample overflow, start smoothly, effectively prevent sample overflow
 - * The closed shell prevents liquid from splashing into the machine and corroding the circuit, allowing it to run continuously and stably for a long time.

Technical Parameters:

Model	BJPX-OHS20
Maximum Volume	20L
Rotation Range	200~3000rpm
Speed Control Accuracy	±3rpm
Timing Range	1~99h59min/continuous
Speed/time Display	LCD
Motor Type	DC motor
Stirring Maximum Viscosity	10000mPas
Power Supply	AC100~240V, 50/60Hz
Power	60W
External Size(W*D*H)	200*315*600mm
Net Weight	7kg
Packing Size(W*D*H)	450*345*155mm
Gross Weight	8.5kg

Overhead Stirrer



Technical Parameters:

Model	OS40-S	OS20-S	OS40-Pro	OS20-Pro
Item No.	8033200200	8033100200	8033200100	8033100100
Max. Stirring Capacity	40L	20L	40L	20L
Motor Input	120W	60W	120W	60W
Motor Output	100W	50W	100W	50W
Speed Range	50~2200rpm			
Speed Control Accuracy	/		±3rpm	
Speed Display	LED		LCD	
Max. Torque	60N•cm	40N•cm	60N•cm	40N•cm
Torque Display	/		LCD	
Overload Protection	Visual alarm, motor automatic stop			
Overload protection display	/	/	LCD	
Max. Viscosity	50000mPa·s	10000mPa·s	50000mPa·s	10000mPa·s
Chuck Diameter Range	0.5~10mm			
Protection Type	IP21			
Working Environment	5~40℃, 80%RH			
Interface	/		RS232	
Power Consumption	130W	70W	130W	70W
Power Supply	AC110~240V, 50/60Hz			
Standard Accessory	Propeller stirrer 18900071		Universal plate stand 18900605, Propeller stirrer 18900071	
External Size(W*D*H)	83*186*220mm			
Package Size(W*D*H)	Main body & Stirrer: 480*380*450mm		Main body & Stirrer: 480*380*450mm Universal plate stand:800*360*130mm	
Gross Weight	Main body & Stirrer: 6kg		Main body & Stirrer: 6kg Universal plate stand: 8kg	

Optional Accessories:

Cat. No. 18900605	Cat. No. 18900071	Cat. No. 18900072	Cat. No. 18900073	Cat. No. 18900074
Descriptions: Universal plate stand (W*D: 20*31cm), including support holder (H: 78cm) and fixing device	Descriptions: Propeller stirrer, shaft length 40cm, stirrer diameter 5cm, 316L stainless steel. Standard stirring element, used at medium and high speeds	Descriptions: Straight stirrer, shaft length 40cm, stirrer diameter 6cm, 316L stainless steel. Suitable for mixing of low viscosity media, used at medium and high speeds	Descriptions: Paddle stirrer, shaft length 40cm, stirrer diameter 6.8cm, 316L stainless steel. Gentle processing samples, used at low and medium speeds	Descriptions: Centrifugal stirrer, shaft length 40cm, stirrer diameter 9cm, 316L stainless steel. Blades open with increasing speed for stirring in a round vessel with a narrow neck, used at medium and high speeds
Cat. No. 18900075	Cat. No. 18900076	Cat. No. 18900077	Cat. No. 18900078	Cat. No. 18900625
Descriptions: Propeller stirrer, shaft length 35cm, stirrer diameter 6.5cm, PTFE coated. Standard stirring element, used at medium and high speeds	Descriptions: Straight stirrer, shaft length 35cm, stirrer diameter 7cm, PTFE coated. Suitable for mixing of low viscosity media, used at medium and high speeds	Descriptions: Paddle stirrer, shaft length 35cm, stirrer diameter 6.8cm, PTFE coated. Gentle processing samples, used at low and medium speeds	Descriptions: Centrifugal stirrer, shaft length 35cm, stirrer diameter 8.5cm, PTFE coated. Blades open with increasing speed for stirring in a round vessel with a narrow neck, used at medium and high speeds	Descriptions: Straight leaves stirrer, shaft length 40cm, stirrer diameter 6cm, 316L stainless steel. Suitable for medium and low viscosity media and for medium-speed use.
Cat. No. 18900626	Cat. No. 18900627	Cat. No. 18900628	Cat. No. 18900743	
Descriptions: Radial stirrer, shaft length 40cm, stirrer diameter 5cm, 316L stainless steel. Suitable for medium and low viscosity media and for medium-high speed use. Recommended for the treatment of gases in liquids	Descriptions: Anchor agitator stirrer, shaft length 40cm, stirrer diameter 6cm, 316L stainless steel. Suitable for medium and low viscosity media and for low-speed use.	Descriptions: Auger-type agitator stirrer, shaft length 40cm, stirrer diameter 6cm, 316L stainless steel. Suitable for medium and low viscosity media and for low-speed use.	Descriptions: Overhead stirrer kit, includes a vertical pole and 6 mixing blade blades, respectively, propeller stirrer, paddle stirrer, centrifugal stirrer, straight leaves stirrer, anchor stirrer, radial stirrer.	

Overhead Stirrer

Features:

- * LCD display, speed and time can be coarsely adjusted, in the working state can also be fine tuning the working time.
- * The rotating speed is 30-2200rpm, can fixer or controlled for high and low speed.
- * Using DC brushless motor, can run safely for a long time with excellent performance.
- * Overload and motor protection. In case of overload, short circuit or abnormal condition, the circuit will be automatically cut off and alarm will be given to ensure the safety of the experiment.
- * Equipped with the agitator hole, no need to adjust the installation height of the instrument, just adjust the installation position of the stirring rod.
- * The torque can be adjusted automatically according to the viscosity change of the sample, which is convenient for experimental operation.
- * A variety of stirring paddle, bracket optional.



Technical Parameters:

Model	OS40-H	OS60-H	OS100-H
Set No	1003002002	1003003002	1003014005
Input Voltage	100~240	100~240	100~240
Output Voltage (V)	24	24	36
Frequency(Hz)	50~60	50~60	50~60
Capacity(L)	40	60	100
Speed Range(rpm)	30~2200	30~2200	30~1600
Speed Display	LCD		
Speed Accuracy(rpm)	±1		
Adjust Mode	Coarse and fine tuning		
Timer Range(min)	1~9999		
Time Display	LCD		
Max Torque(N.cm)	60	80	100
Max Viscosity(mpas)	50000	80000	100000
Input Power(W)	120	160	400
Output Power(W)	100	150	200
Protect Class	IP42		
Motor Protection	Display failure automatic stop		
Overload Protection	Display failure automatic stop		
Safety Protection	Chuck Protector + Anti-Slip Pad		
Ambient Temperature(°C)	5~40		
Ambient Humidity(%)	80		
Package Size(mm)	803*400*140		
Gross Weight (kg)	12.5	12.5	13.1
Remarks	1003002002 OS40-H set includes: 1. OS40-H host 1003002001 2. Tablet stand set 20030130 (single hole square fixed head) 3. Four-blade stainless steel mixing paddle 20030001	1003003002 OS60-H set includes: 1. OS60-H host 1003003002 2. Tablet stand set 20030130 (single hole square fixed head) 3. Four-blade stainless steel mixing paddle 20030001	1003014005 OS100-H set includes: 1. OS100-H host 1003014001 2. Tablet stand set 20030130 (single hole square fixed head) 3. Four-blade stainless steel mixing paddle 20030001



Features:

- * Knob speed adjustment, 200~2500rpm adjustable.
- * Self-locking drill chuck, tools free. It can be used to fix the stirring paddle and prevent it from falling off.
- * Silicone cover protects the drill chuck from erosive vapor.
- * Constant speed despite viscosity change of the sample.
- * Starts/runs smoothly, preventing sample splatter or overflow.
- * Low noise and strong power.
- * Overload protection.

Technical Parameters:

Model	OS10-Pro
Item No.	8055400200
Max. Stirring Quantity(H ₂ O)	10L
Speed Range	200~2500rpm
Speed Display	OLED
Speed Display Resolution	±1rpm
Max. Viscosity	10000mPas
Motor Type	DC brush motor
Max. Torque	20N·cm
Overload Protection	Automatic stop
Protection Class	IP21
Power Supply	AC100~240V, 50/60Hz
Consumption	50W
External Size(W*H*D)	373*238*623mm
Net Weight	4.8kg
Packing Size(W*H*D)	500*400*140mm
Gross Weight	5.8kg

Hot Plate
 Electric Hotplate



Introduction:

An electric hot plate is a versatile heating device for industrial and laboratory applications, engineered based on the resistance heating principle. It converts electrical energy into thermal energy, delivering a stable heat source for sample heating, temperature maintenance, drying, and reactive processes. Widely used in chemical analysis, biological experiments, material testing, food processing, and industrial production, it boasts core advantages such as excellent heating uniformity, high temperature control precision, and user-friendly operation—effectively meeting the diverse temperature control requirements across various fields.

Features:

- * Real-time temperature value display, countdown display.
- * PID microprocessor controls temperature.
- * Built-in temperature deviation calibration function.
- * LCD liquid crystal display.
- * The timer can precisely control the heating time, the timing range: 0 to 9999 minutes(hours); the timing error: <1%.
- * The surface is made of 304 stainless steel, featuring high strength and corrosion resistance.
- * The temperature rises quickly and evenly, and the operation is simple and safe to use.

Technical Parameters:

Model	BJPX-HP3040
Working Size	400*300mm
Temp. Control Range	RT+5~320℃
Temp. Control Precision	±1℃
Stage Material	304 stainless steel
Power	2000W
Power Supply	220V/110V, 50/60Hz
External Size(W*D*H)	450*330*200mm
Net Weight	15kg
Packing Size(W*D*H)	500*380*260mm
Gross Weight	18kg

Ceramic Hot Plate



Introduction:

An electric hot plate is a versatile heating device for industrial and laboratory applications, engineered based on the resistance heating principle. It converts electrical energy into thermal energy, delivering a stable heat source for sample heating, temperature maintenance, drying, and reactive processes. Widely used in chemical analysis, biological experiments, material testing, food processing, and industrial production, it boasts core advantages such as excellent heating uniformity, high temperature control precision, and user-friendly operation—effectively meeting the diverse temperature control requirements across various fields.

Features:

- * The heating plate adopts a full ceramic heating disk, featuring wear resistance and corrosion resistance.
- * The fully enclosed heating disk ensures no open flame, fast heating, and high safety and reliability.
- * The outer shell is made of high-quality cold-rolled steel plates via stamping, with a surface treated by spray coating technology.
- * It adopts an intelligent PID control method, which boasts advantages such as small temperature fluctuation and precise temperature control.

Technical Parameters:

Model	CH-300	CH-400
Plate Size(mm)	300*200	400*280
Max. Temperature	450℃	
Material(Main body)	Cold-rolled steel with anti-bacteria powder coating	
Work Plate Material	Ceramic	
Power Supply	AC220V, 50/60Hz	
Consumption(W)	1800	2200
External Size(W*D*H)	350*340*188mm	450*420*188mm
Package Size(W*D*H)	460*430*290mm	570*500*290mm
Gross Weight	9kg	13.6kg

Glass Ceramic Hot Plate



- Features:**
- * LED display.
 - * Totally enclosed glass ceramic heating plate, provides chemical-resistant and most efficient heat transfer.
 - * Separate safety circuits with fixes safety temperature of 580°C.
 - * External temperature control is possible by connecting the temperature sensor (PT 1000) with and accuracy at ±0.5°C.
 - * Alarm: The HOT warning will flash when the heating plate temperature is over 50°C, even the heating plate is turn off.

Technical Parameters:

Model	HP550-S
Item No.	5031122211
Plate Size	184*184mm (7 inch)
Heating Temperature Range	Room temp.-550°C,increment 5°C
Heating Accuracy	±10°C
Heating Position	1
Material(Main body)	Glass ceramic
Protection Warning	50°C
Protection Type	IP21
Power Supply	AC110/220V±10%; 50/60Hz (Customizable)
Power	1010W
Heating Power	1000W
Working Environment	5-40°C,80%RH
External Size(W*D*H)	215*360*112mm
Package Size(W*D*H)	500*360*270mm
Gross Weight	7kg

Aluminum/Ceramic Hot Plate



AH-120E



AH-170E



CH-190E



AH-400/600D



AH-400/600E

- Features:**
- * LED display (AH-400D/AH-600D)
 - * Heating can proceed simultaneously
 - * Enclosed hot plate with flame protection, fast warm-up and durability

Technical Parameters:

Model	AH-120E	AH-170E	CH-190E	AH-400E/D	AH-600E/D
Plate Size	120*120mm	170*170mm	190*190mm	400*400mm	400*600mm
Max. Temperature	RT~380°C			RT~350°C	
Work Plate Material	Aluminum		Ceramic	Aluminum	
Power Supply	AC110/220V±10%, 50/60Hz			AC220V±10%,50/60Hz	
Consumption	180W	500W	600W	2000W	3000W
External Size(W*D*H)mm	200*120*90	265*185*190	320*190*125	400*400*180	400*600*180
Package Size(W*D*H)mm	250*180*190	280*210*220	390*240*230	450*470*220	470*650*220
Gross Weight(kg)	3	3.4	6	9.8	14.2

Electronic & Digital Hot Plate

Application:

It applies in drying articles in chemical analysis, physical determination, heat treatment and other temperature experiments in laboratories of industrial mining enterprise, medicine and health, environmental protection, biochemistry and scientific research and college labs etc.



Electronic Hot Plate(SSH-E Series)



Digital Hot Plate (SSH-D Series)

Features:

- * PID controller
- * Totally enclosed high quality stamping cold-rolled steel heating plate, with no open fire.
- * SSH-E type, adopts electric temperature control, could adjust temperature.
- SSH-D type, with LED display, easy to observe and control temperature.
- * Control style: SSH-E electric type SSH-D digital type.

Technical Parameters:

Model	SSH-E400	SSH-E450	SSH-E600	SSH-D400	SSH-D450	SSH-D600
Plate Size	400*280mm	450*350mm	600*400mm	400*280mm	450*350mm	600*400mm
Range of Temperature	RT+20~380°C					
Material (Main body)	Cold-rolled steel with anti-bacteria powder coating					
Work Plate Material	Stainless steel					
Power Supply	AC220V,50/60HZ					
Consumption	1500W	2000W	3000W	1500W	2000W	3000W
Package Size(W*D*H)mm	450*340*290	500*400*290	650*460*290	450*340*290	500*400*290	650*460*290
Gross Weight(kg)	16	22	30	16.5	21.5	30

Heating Mantle

Several Rows Electronic Control Heating Mantles



HMD-III(LED Display)



HME-III

Features:

- * Corrosion-resisting and ageing-resistant
- * The internal heater is in hemisphere shape with high efficiency.
- * The external material is cold-rolled steel with anti-bacteria powder coating.
- * It adopts high-temperature resistant alkali-free glass fiber with good isolation performance.

Technical Parameters:

Model	Rows	Capacity (ml)	Max. Use Temp.	Working Time	Consumption(W)	Power Supply	External Size (W*D*H) mm	Packing Size (W*D*H) mm	Net Weight	Gross Weight
HME-III / HMD-III (LED Display)	Two rows	100	380°C	Continuous	200	AC110/220V±10%, 50/60Hz	280*290*150	375*385*245	4kg	7kg
		250			360		280*290*150	375*385*245	4kg	7kg
		500			500		320*320*155	415*415*245	5kg	8kg
		1000			600		390*355*150	485*450*245	7kg	10kg
	Four rows	100			400		550*290*150	645*385*245	8kg	11kg
		250			720		550*290*150	645*385*245	8kg	11kg
		500			1000		635*315*150	730*410*245	10kg	13kg
		1000			1200		780*350*150	875*445*245	14kg	17kg
	Six rows	100			600		830*295*150	925*390*245	12kg	17kg
		250			1080		830*295*150	975*440*245	13kg	18kg
		500			1500		950*310*150	1045*405*245	14kg	19kg
		1000			1800		1170*355*150	1670*450*245	20kg	23kg

Electronic & Digital Heating Mantles



HMD-I



HME-I

Features:

- * Corrosion-resisting and ageing-resistant.
- * The internal heater is in hemisphere shape with high efficiency.
- * The external material is cold-rolled steel with anti-bacteria powder coating.
- * It adopts high-temperature resistant alkali-free glass fiber with good isolation performance.

Technical Parameters:

Model	HME-I / HMD-I(LED Display)									
Capacity(ml)	100	250	500	1000	2000	3000	5000	10000	20000	50000
Max. Temp.	380℃									
Working Time	Continuous									
Consumption	100W	180W	250W	300W	500W	600W	1000W	1500W	2500W	6000W
Power Supply	AC220/110V±10%, 50/60Hz									
Internal Size (mm)	Φ70*40	Φ95*50	Φ150*50	Φ150*70	Φ180*80	Φ200*100	Φ245*150	Φ310*175	Φ380*190	Φ480*270
External Size (W*D*H)	220*195*165mm			280*260*205mm	320*300*215mm	355*300*240mm	415*370*270mm	480*430*300mm	540*530*280mm	665*450*550mm
Packing Size (W*D*H)	265*270*240mm			320*320*260mm	360*355*290mm	360*360*330mm	420*420*255mm	470*470*330mm	540*540*440mm	775*775*560mm
Net Weight	1.7kg	1.8kg	1.8kg	2.55kg	3.8kg	4.2kg	7kg	10.2kg	13.3kg	53kg
Gross Weight	2.5kg			3.7kg	5kg	5.7kg	10kg	11.5kg	17kg	68kg

Electronic & Digital Magnetic Stirring Heating Mantles



HMD-II



HME-II

Features:

- * The internal heater is in hemisphere shape with high efficiency.
- * The external material is cold-rolled steel with anti-bacteria powder coating.
- * Stepless speed adjustment, uniform temperature, easy to operate with effective use.
- * It adopts high-temperature resistant alkali-free glass fiber with good isolation performance.
- * Stable precise stirring to liquid solution is within a wider speed scope, especially in the experiments of samples with small volume.

Technical Parameters:

Model	HME-II / HMD-II(LED Display)				
Capacity(ml)	100	250	500	1000	2000
Max Use Temp.	380℃				
Speed	0~1200rpm				
Working Time	Continuous				
Max Use Temp.	380℃				
Consumption	100W	180W	250W	300W	500W
Power Supply	AC220/110V±10%, 50/60Hz				
Internal Size(mm)	Φ70*50	Φ90*60	Φ105*65	Φ135*80	Φ175*95
External Size(W*D*H)	220*195*165mm	220*195*165mm	220*195*165mm	280*260*205mm	320*300*215mm
Packing Size(W*D*H)	295*290*255mm	290*285*250mm	295*290*255mm	350*345*305mm	385*380*340mm
Net Weight	3kg	3kg	4kg	4kg	5kg
Gross Weight	4kg	4kg	5kg	6kg	7kg

Electronic & Digital Heating Mantles



Features:

- * Electronic temperature regulation, stepless regulation.
- * Cold rolled steel plate, surface sprayed.
- * Thermal insulation cotton is high quality aluminum silicate cotton.
- * PID single digital temperature controller, can automatically control the temperature, digital display, fast heating, uniform temperature, accurate temperature control. (only for HMD-IIC)
- * PT100 temperature sensor, equipped with adjustable sensor bracket. (only for HMD-IIC)

Technical Parameters:

Model	HME-IB / HMD-IIC(LED display)									
Capacity(ml)	50	100	250	500	1000	2000	3000	5000	10000	20000
Max. Temp	450°C									
Working Time	Continuous									
Heating Power(kW)	0.08	0.1	0.15	0.25	0.35	0.45	0.6	0.8	1.2	2.5
Power Supply	Standard: 200~240V, 50/60Hz Optional: 110V, 50/60Hz									
External Size(mm)	Φ200*165		Φ280*220		Φ330*230		Φ340*245		Φ350*250	
Package Size(mm)	230*230*195		290*290*300		340*340*350		360*360*300		390*390*310	
Net Weight(kg)	2.5		5.5		6.5		7.5		8	
Gross Weight(kg)	2.8		6		7		8		9.2	

Electronic & Digital Magnetic Stirring Heating Mantles



Features:

- * Electronic temperature regulation, stepless regulation.
- * Cold rolled steel plate, surface sprayed.
- * Thermal insulation cotton is high quality aluminum silicate cotton.
- * PID single digital temperature controlle. (only for HMD-IIIB)
- * PT100 temperature sensor, equipped with adjustable sensor bracket. (only for HMD-IIIB)

Technical Parameters:

Model	HME-IIB / HMD-IIIB(LED display)									
Capacity(ml)	50	100	250	500	1000	2000	3000	5000	10000	20000
Max. Temp	450°C									
Temp Control	RT+20~250°C									
Speed	0~1600rpm									
Working Time	Continuous									
Motor Power(kW)	0.01									
Heating Power(kW)	0.08	0.1	0.15	0.25	0.35	0.45	0.6	0.8	1.2	2.5
Power Supply	Standard: 200~240V, 50/60Hz Optional: 110V, 50/60Hz									
External Size(mm)	Φ200*165		Φ280*220		Φ330*230		Φ340*245		Φ350*250	
Package Size(mm)	230*230*195		290*290*300		340*340*350		360*360*300		390*390*310	
Net Weight(kg)	2.5		5.5		6.5		7.5		8	
Gross Weight(kg)	2.8		6		7		8		9.2	

Electrochemistry Meter

Pocket pH Tester



- Features:**
- * High precision, an accuracy of ±0.2pH is sufficient to meet the needs of daily testing.
 - * Easy to operate, simple button operation with a built-in LCD display, making data intuitive and easy to read.
 - * Wide range of applications, suitable for testing the pH level of fish tanks, aquariums, drinking water, and more.

Accessories:
 Meter; pH probe; pH calibration buffer powder*3; packing box

Technical Parameters:

Model		PH-P02
pH	Range	0~14pH
	Resolution	0.01pH
	Accuracy	±0.2pH
	Calibration Points	1 to 3 points
	Auto. Temp. Compensation	0~50℃
Power Requirements		2*1.5V(LR44)
External Size(W*D*H)		31*18*155mm
Package Size(W*D*H)		58*30*167mm
Net Weight		43g
Gross Weight		104g

Pocket pH Tester



- Features:**
- * Ultra-small and ultra-thin shape design, electrode diameter 10mm, can determine the PH value in the test tube.
 - * Excellent functions: automatic correction, automatic shutdown, low voltage alarm, electrode failure reminder and other intelligent functions.
 - * Reliable design: in line with IP57 waterproof grade, dustproof and waterproof, replaceable electrode, calibration solution and spare battery in the meter box.
 - * Can be used continuously for more than 30 hours.

Accessories:
 pH electrode; pH buffer pouches(PH4.00/6.86/9.18); two lithium batteries, instruction book; packing box

Technical Parameters:

Model		PH-P302
pH	Range	-2.00~20.00pH
	Resolution	0.01pH
	Accuracy	±0.05pH
	Calibration Points	1~3 points(pH4.00/6.86/9.18)
Power Requirements		CR2032 Lithium battery*2
Temp. Compensation		0~99.9℃(Manual)
IP Grade		IP57
External Size(W*D*H)		185*50*20mm
Package Size(W*D*H)		210*65*50mm
Net Weight		0.03kg
Gross Weight		0.2kg

Pocket pH Tester



Introduction:

This pocket pH meter can measure pH, ORP(ORP probe optional) and temperature simultaneously. Pocket design, ready to use anytime. Lightweight body, easy to carry around. Equipped with a highly sensitive electrode for fast response and stable, reliable results. Suitable for various applications such as water quality testing, laboratory analysis, aquaculture, and food processing.

Features:

- * Easy Auto. Calibration with buffer recognition; Auto Temp. Compensation (ATC) which ensures accuracy in variant temperatures (0~60.0°C).
- * Data hold function available.
- * Different LCD display backlight color for easy operation.
- * Complete kit with ready-to-use accessories, very easy to use in the field test.
- * Restore to factory default function: available.
- * Probe replaceable, high cost-performance.
- * IP rating: IP67.

Features For PH-P1+:

- * Cloud-based data management system – allows you to record, manage, and share your test data at your finger tip, never worry about data loss.
- * Comprehensive information display – 4 types of measurement display modes to fit in different situations.
- * The product can be used as a classic tester even without connecting to a smart phone.
- * Ability to add sample name, operator name in every data set.


Accessories:

PH-P1: Meter(Probe and batteries preinstalled); pH buffer solution: pH4.00/7.00/10.01, 30mL, one for each; 3mol KCl pH/ORP soaking solution, 10mL, 1 bottle; sample vials 30mL*3; lanyard*1; hard carrying case(W/D/H: 280*230*82mm)
PH-P1+: Meter(Probe and batteries preinstalled); pH buffer solution: pH4.00/7.00/10.01, 30mL, one for each; 3mol KCl pH/ORP soaking solution, 10mL, 1 bottle; sample vials 30mL*3; lanyard*1; hard carrying case(W/D/H: 280*230*82mm)

Technical Parameters:

Model		PH-P1	PH-P1+
pH	Range	-2.00~16.00pH	
	Resolution	0.01pH	
	Accuracy	±0.01 pH ± one digit	
	Calibration Points	1 to 3 points	
	Auto. Temp. Compensation	0~60°C(32~140°F)	
mV (ORP probe optional)	Range	-1000mV~ +1000mV	
	Resolution	±0.1/1mV	
	Accuracy	±0.1% FS ± one digit	
Temperature	Range	0~60°C(32~140°F)	
	Accuracy	±0.2°C	
Power Requirements		4*1.5V AAA alkaline batteries	
External Size(W*D*H)		38*36*195mm	
Package Size(W*D*H)		330*280*130mm	
Net Weight		147g	
Gross Weight		1kg	

Pocket pH /°C/°F Tester

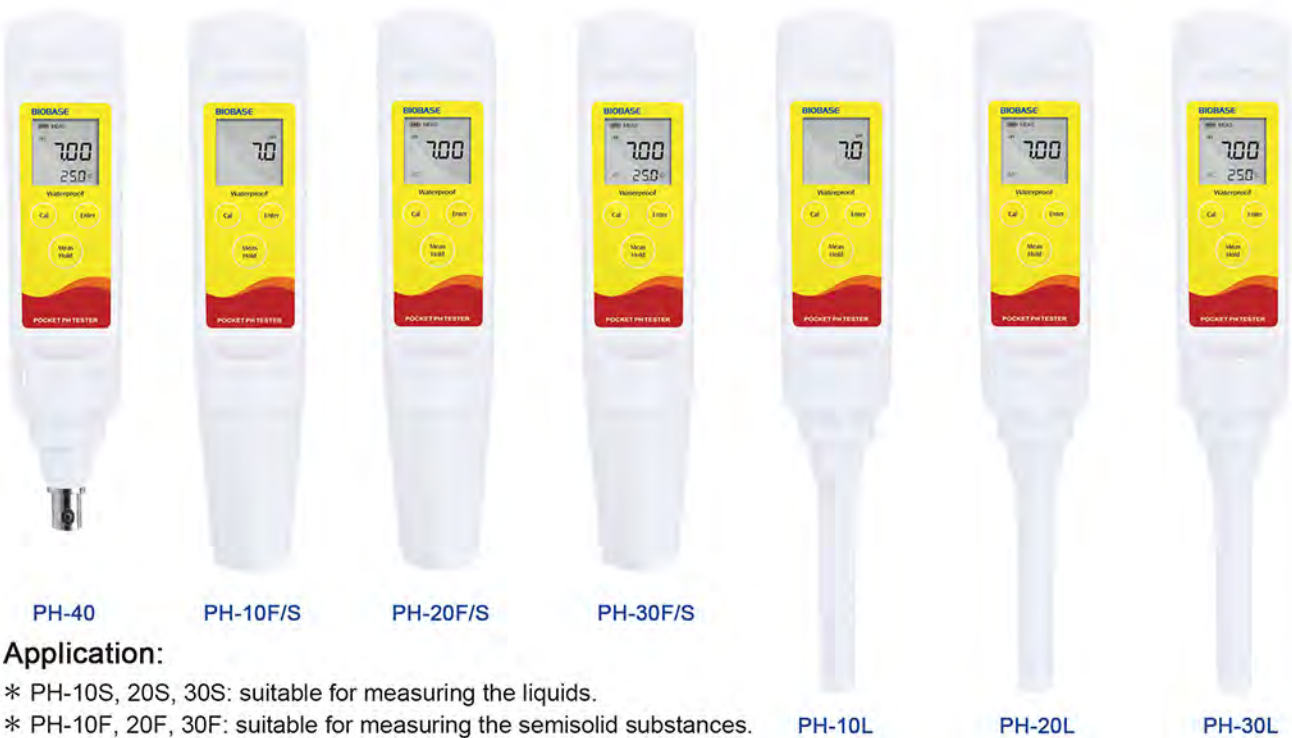

Application:

- * PH-10S, 20S, 30S: suitable for measuring the liquids.
- * PH-10F, 20F, 30F: suitable for measuring the semisolid substances.
- * PH-10L, 20L, 30L: suitable for measuring the small volume samples.
- * PH-40 is suitable for connecting with the various pH electrodes.

PH-10/20 Features:

- * 2 points push-button calibration with auto-buffer recognition.
- * Hold function freezes current measured value for easy viewing and recording.
- * Auto-Power Off helps user effectively conserve battery life.
- * Replaceable electrode module reduces maintenance and replacement cost.



PH-30/40 Features:

- * BNC connector is easy to connect a variety of pH electrodes (Only for PH-40).
- * 1 to 3 points calibration with automatic recognition for USA and NIST buffers.
- * Automatic temperature compensation ensures accurate readings over the entire range (Only for PH-30); Manual temperature compensation provides a wide range of temperature input (Only for PH-40).
- * Auto-Read function senses and locks the measurement endpoint
- * Setup menu allows setting the pH buffer set, number of calibration points, temperature unit, auto-power off, etc.
- * Reset function automatically resumes all settings back to the factory defaults.



Replaceable pH Electrodes:



PH-S
Circular pH-sensitive membrane
Suitable for measuring the liquids



PH-F
Flat surface pH-sensitive membrane
Suitable for measuring the semisolids



PH-L
Flat surface pH-sensitive membrane
Suitable for measuring the small volume samples

Accessories:

pH buffer pouches (pH4.01/7.00/10.01), batteries, plastic box or carrying case.

Technical Parameters:

Model		PH-10S/F/L	PH-20S/F/L	PH-30S/F/L	PH-40
pH	Range	0.0~14.0pH		-1.00~15.00pH	
	Accuracy	±0.1pH	±0.05pH	±0.01pH	
	Calibration Points	2 points		1~3 points	
	pH Buffer Options	USA (pH4.01/7.00/10.01)		USA (pH4.01/6.86/7.00/9.18/10.01)	
Temperature	Range	/	0~60°C	0~60°C/32~140°F	0~100°C/32~212°F
	Resolution	/	1°C	0.1°C/0.1°F	0.5°C/0.5°F
	Accuracy	/	±1°C	±1°C/±1.8°F	/
	Offset Calibration	/	/	1 point, reading ±10°C	/
Other Specifications	Temp.Compensation	/	0~60°C, Automatic		0~100°C, Manual
	Hold Function	Manual		Manual or Auto-endpoint	
	Auto-Off	8 minutes after last key pressed			
	Operating Temperature	0~50°C			
	Display	Single-line LCD (21*21mm)		Dual-line LCD (21*21mm)	
	Connector	6-pin			BNC
	Power Requirements	3*1.5V LR44 micro alkaline batteries		2*1.5V AAA batteries	
	Battery Life	Approximately 150 hours of continuous use		Approximately 200 hours of continuous use	
	Dimensions (L*D) mm	185 (L) *40 (Dia.)			175 (L)*40 (Dia.)
	Package Size (W*D*H) mm	325*140*270			
	Net Weight(g)	100g			
	Gross Weight(kg)	1kg			

Portable pH Meter



- Features:**
- * 3.5-inch color screen, user-friendly interface.
 - * Data logging up to 3000 groups.
 - * Calibration points: 1~3 points.
 - * Equipped with a USB Type-C charging port, conforms with the EU new law.
 - * Ideal for use in harsh environments —IP57 Waterproof and Dustproof rating, silicone socket protector and grip cover protect the instrument from general impact.
 - * Large backlit LCD displays pH/mV and temp along with icons of stable readings.
 - * Foldable stand allows use as a bench-top meter.
 - * For general liquid test.

Accessories:
 Meter; plastic ATC pH electrode; pH buffer solution: 4.00/7.00/10.01 50mL, one for each; Type-C charger cable; card carrying case

Technical Parameters:

Model		PH-P10
pH	Range	-2.000~20.000pH
	Resolution	0.01/0.1/0.001pH
	Accuracy	±0.002pH±one digit
	Calibration Points	1~3points
	Temp. Compensation	0.0~100.0℃/32.0~212.0°F, automatic
mV (ORP probe optional)	Range	-1999~1999mV
	Resolution	0.1mV
	Accuracy	±0.03% FS±one digit
Temperature	Range	-10.0~135.0℃/14.0~275.0°F
	Resolution	0.1℃
	Accuracy	±0.2℃
Data Storage/Content		3000 groups Serial number, mode, measuring value, temp, date: Y/M/D/H/M
Charging Port		Type-C - USB
PC Software Function		GLP measurement management Two-level user management The user's operation history log Meter usage management Automatically/manually timing data storage
Power Requirements		Rechargeable lithium battery*1
External Size(W*D*H)		79*32*204mm
Package Size(W*D*H)		380*330*130mm
Net Weight		350g
Gross Weight		2kg

Portable pH Meter



- Features:**
- * 7-inch color high-resolution(1024*600) capacitive touchscreen with intuitive UI and navigational operation, offering high sensitivity and comprehensive parameter display for user-friendly experience.
 - * The main unit housing is PEEK material, featuring high temperature resistance, corrosion resistance, and aging prevention.
 - * Built-in ARM 32-bit microprocessor with digital filtering and slip difference technology for enhanced response speed and measurement accuracy. Circuit boards use SMT assembly, improving reliability.
 - * Complies with international GLP standards, offering auto-calibration, auto-temperature compensation, data storage, USB output, clock display, wireless printing, function settings, and self-diagnostics.
 - * Stores 500 sets of measurements; data transfer via USB drive, compatible with Excel for analysis.
 - * USB interface enables data export to computers; dedicated software optional for PC connectivity and data management.
 - * Optional Bluetooth module supports wireless printing.
 - * Rated IP54 for dust and splash resistance.

Accessories:
 Meter; composite electrode; temperature electrode; standard buffer solutions(4.00, 6.86, 9.18); power adapter; electrode holder(With base); carrying case

Technical Parameters:

Model		PH-P701
pH	Range	-2.000~20.000pH
	Resolution	0.01/0.1pH
	Accuracy	±0.02pH
	Calibration Points	1~3points
	Temp. Compensation	0.0~100.0℃, manual/automatic
mV (ORP probe optional)	Range	-1999~1999mV
	Resolution	1mV
	Accuracy	±0.1% FS
Temperature	Range	0~100℃
	Resolution	0.1℃
	Accuracy	±0.5℃
Display		7-inch touchscreen
Data Storage		500 groups
Communication Interface		USB2.0, optional Bluetooth module
Power Requirements		3.7V/1800mA rechargeable lithium battery
External Size(W*D*H)		195*135*40mm
Package Size(W*D*H)		480*385*250mm
Net Weight		600g
Gross Weight		4.5kg

Benchtop pH Meter



Introduction:

pH meter is an electrochemical instrument designed for the precise measurement of the acidity or alkalinity(pH value) of an aqueous solution. Its core component is a glass electrode sensitive to hydrogen ions. The device operates by measuring the potential difference generated between the electrode and the solution, which is then converted into a corresponding pH reading based on the Nernst equation. To ensure accurate measurements, regular calibration using standard buffer solutions is required. The pH meter is widely used across various fields, including industrial process control, environmental monitoring, food safety, pharmaceutical and biochemical industries, as well as agricultural research, making it an essential tool for quantitative analysis and quality control.

Accessories:

- Meter
- pH composite electrode
- Calibration solution

Features:

- * Use a large screen and LCD display.
- * PH-25: pH; mV, PH-3CU: pH; mV; temperature
- * Equipped with USB communication interface, REX data acquisition software(For PH-3CU).
- * PH-25 has a manual temperature compensation function, PH-3CU has the functions of manual and automatic temperature compensation.
- * One or three-point calibration.
- * The electrode holder allows for flexible adjustment of the electrode position, facilitating testing.

Technical Parameters:

Model		PH-25	PH-3CU
pH	Range	0.00~14.00pH	-2.00~19.99pH
	Resolution	0.01pH	
	Accuracy	±0.02pH ± one digit	±0.01pH ± one digit
	Calibration Points	1~3 points, automatically	
mV	Range	0~1599mV	-1999~1999mV
	Resolution	1mV	
	Accuracy	±1%FS	±1mV ± one digit
Temperature	Range	/	0.0~80.0℃
	Resolution	/	0.1℃
	Accuracy	/	±0.1℃
Temp. Compensation Range		0.0~60.0℃	0.0~80.0℃
Power Requirements		DC(9V, 1.0A)	
External Size(W*D*H)		220*160*65mm	290*210*95mm
Package Size(W*D*H)		330*300*145mm	365*300*215mm
Net Weight		1.5kg	
Gross Weight		2.5kg	

Laboratory pH Meter



BK-PH3A



BK-PH3B

Introduction:

Suitable for environmental monitoring, ecological research, sewage treatment, industrial and mining enterprises, agriculture, medicine, teaching and so on for sampling and determination of pH value of aqueous solution and measuring electrode potential (mV value).

Features:

- * High precision measurement, 0.01 pH accuracy class, high reproducibility of measurement results.
- * With parameter memory function, power on again to display the last set parameters, saving operation steps.
- * With data storage function, BK-3A/B can up to 1000 sets of storage.
- * Multifunctional electrode holder with multi-hole design, supporting simultaneous use of multiple electrodes, and featuring 360-degree rotation and vertical movement.
- * Equipped with remote upgrade capabilities, customers can perform on-site upgrades according to their needs with ease of operation.
- * The instrument is plugged in for use and comes standard with a Type-C port.
- * The ORP function can be optionally equipped. The measurement range is -2000~2000mV.


Accessories:

- * pH composite electrode
- * Electrode holder
- * Buffer agent
- * Electrode protection solution
- * Power adapter

Technical Parameters:

Model		BK-PH3A	BK-PH3B
Accuracy Class		0.01 pH accuracy class	
Calibration		1 to 3 point calibration	
Display		7-inch touch screen	
Temperature Compensation		Manual temperature compensation	
pH	Range	-2.00~18.00pH	
	Resolution	0.01pH	
	Reading Error	±0.01pH	
	Repeatability Error	0.005pH	
	Reading Error (Including electrode)	±0.02pH	
	Repeatability Error (Including electrode)	0.01pH	
mV	Range	-1999~1999mV	
	Resolution	1mV	
	Repeatability Error	1mV	
Temperature	Range	/	-5.0~110.0℃
	Resolution	/	0.1℃
	Reading Error	/	±0.2℃
	Reading Error (Including electrode)	/	±0.4℃(0~60℃) ±1.0℃(Other ranges)
Connector		BNC, 3.5mm jack socket	
Power Requirements		DC9V/400mA power adaptor	
Power Supply		AC110~240V, 50/60Hz	
External Size(W*D*H)		250*190*71mm	
Package Size(W*D*H)		300*310*300mm	
Net Weight		5kg	
Gross Weight		6kg	

Benchtop pH Meter

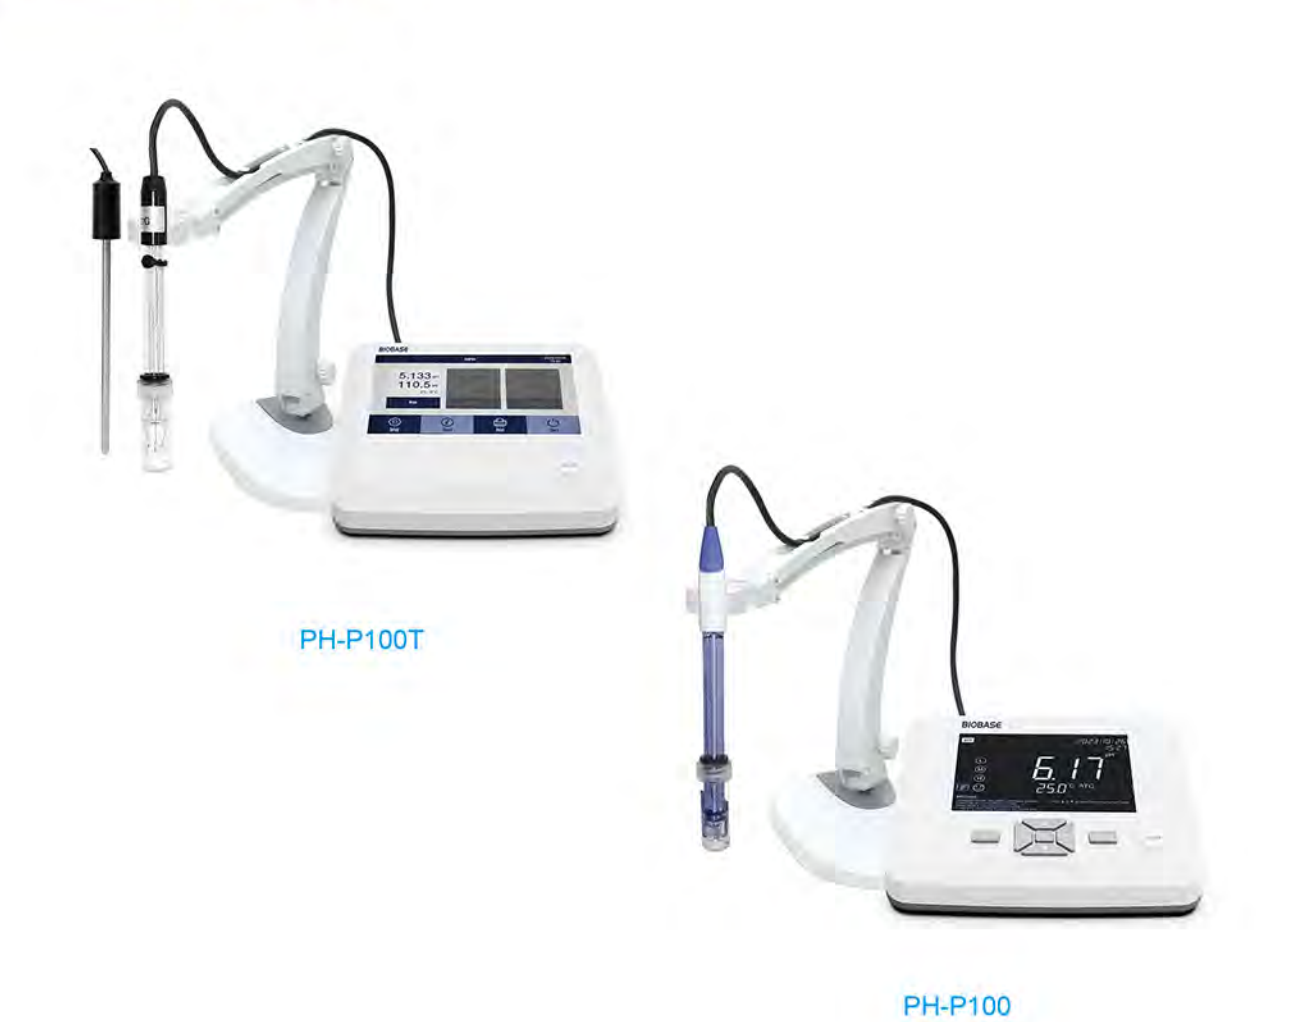

Introduction:

This benchtop pH meter is a high-precision and versatile analytical instrument widely used in environmental monitoring, ecological research, sewage treatment, industrial and mining enterprises, agricultural production, pharmaceutical manufacturing, teaching experiments, and scientific research. It enables rapid and accurate sampling and measurement of the pH value of aqueous solutions, as well as electrode potential (mV value), offering stable performance and user-friendly operation. Equipped with advanced electrode technology, the instrument provides strong anti-interference capability and temperature compensation performance, ensuring reliable data even under complex sample conditions. Its large screen and intuitive interface enhance measurement efficiency, while data storage functionality supports further analysis and record-keeping.

Accessories:

PH-P100: Meter; plastic pH electrode; pH buffer solution: 4.00/7.00/10.01, 50mL, one for each; electrode holder; power adaptor
 PH-P100T: Meter; refillable glass pH probe; stainless steel probe; pH buffer solution: pH4.00/7.00/10.01, 50mL, one for each; flexible probe holder; PC cable; power adaptor

Features:

- * High-resolution LCD display screen.
- * With built-in microprocessor chip, automatic calibration, automatic temperature compensation, data storage, parameter setup, etc.
- * Automatic calibration, self-diagnosis, automatically recognizing standard buffer solutions (USA or NIST series)
- * Fast response, high accuracy, stable reading display.
- * Auto Temp. Compensation, measuring pH and temperature simultaneously.
- * The kit comes with an ATC pH probe, electrode holder and 3 bottles of pH buffer solutions for convenient use.
- * IP54 dustproof and spillproof.

Technical Parameters:

Model		PH-P100	PH-P100T
pH	Range	-2.00~20.00pH	
	Resolution	0.01/0.1pH	0.001/0.01pH
	Accuracy	±0.01pH ± one digit	
	Calibration Points	1~3 points, automatically	
	ATC Range	-9.9~130.0°C/14.1~266.0°F	
mV(ORP probe optional)	Range	-1999~1999mV	
	Resolution	1mV	0.1mV
	Accuracy	±0.1% FS ±one digit	
Temperature	Range	-9.9~130.0°C/14.1~266.0°F	
	Resolution	0.1°C	
	Accuracy	±0.2°C	
Data Storage		450 groups	500 groups
Data Transfer		USB stick Bluetooth connection to printer (Printer is optional)	USB to flash disk USB to PC Wireless connection to printer (Printer is optional)
Power Requirements		DC12V	
External Size(W*D*H)		200*170*64mm	
Package Size(W*D*H)		540*330*130mm	
Net Weight		550g	567g
Gross Weight		2.2kg	

Benchtop pH Meter



PHS-25CW/3BW



PH-210

PHS-25CW/3BW Features:

- * Economical benchtop pH meter is equipped with a white backlit LCD display.
- * Automatic electrode slope display helps user decide whether to replace sensor.
- * Automatic Temperature Compensation ensures accurate measuring result.
- * 2 points push-button calibration with auto-buffer recognition.

PH-210 Features:

- * 1 to 3 points calibration with automatic recognition for USA and NIST buffers.
- * Automatic electrode diagnosis helps user decide whether to replace the pH electrode.
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Auto-Read function senses and locks the measurement endpoint.
- * Setup menu allows setting the pH buffer set, number of calibration points, temperature unit, etc.
- * Reset function automatically resumes all settings back to the factory defaults .

Accessories:

- * PH electrode.
- * Temperature probe (Only for PHS-3BW and PH-210 meter).
- * PH buffer pouches (pH4.01/7.00/10.01).
- * DC9V power adapter.



Technical Parameters:

Model		PHS-25CW	PHS-3BW	PH-210
pH	pH Range	0.00~14.00pH	0.00~14.00pH	-1.00~15.00pH
	pH Accuracy	±0.05pH	±0.01pH	±0.01pH
	Resolution	0.01pH	0.01pH	0.01pH
	Calibration Points	2 points	2 points	1~3 points
	Calibration Solutions	USA (pH4.01/7.00/10.01)	USA (pH4.01/7.00/10.01)	USA (pH4.01/7.00/10.01), NIST (pH4.01/6.86/9.18)
ORP	MV Range	-1999~1999mV	-1999~1999mV	-1999~1999mV
	MV Accuracy	±10mV	±1mV	±1mV
	Resolution	1mV	1mV	1mV
Temperature	Temperature Range	/	0~100°C	0~105°C, 32~221°F
	Temperature Accuracy	/	±1°C	±1°C/±1.8°F
	Resolution	/	1°C	0.1°C/0.1°F
	Offset Calibration	/	/	1 point, reading ±10°C
Other Specifications	Temperature Compensation	0~100°C, Manual	0~100°C, Manual or Automatic	0~100°C, 32~212°F, Manual or Automatic
	Hold Function	/	/	Manual or auto-endpoint
	Connector	BNC, 3.5 mm jack socket		BNC, 3.5 mm jack socket
	Display	Custom LCD		Custom LCD (120*60 mm)
	Power Requirements	DC9V/400mA power adapter		
	Dimensions(mm)	210*205*65		210*205*75
	Net Weight(kg)	1.5		
	Package Size(W*D*H)mm	310*240*180		
	Gross weight(kg)	1.7		

Pocket Conductivity Tester



Introduction:

This tester can measure conductivity, TDS, salinity, resistivity and temperature altogether.

Features:

- * Easy Auto. Calibration with standard solution recognition; Auto Temp. Compensation(ATC) which ensures accuracy in variant temperatures (0~60.0°C).
- * Data hold function available.
- * Different LCD display backlight color for easy operation.
- * Complete kit with ready-to-use accessories, very easy to use in the field test.
- * Restore to factory default function: available.
- * Probe replaceable, high cost-performance.
- * IP rating: IP67.

Accessories:

Meter (Probe and batteries preinstalled); standard conductivity solution: 30mL: 1413μS/12.88mS/cm one for each; sample vials*2; lanyard*1; hard carrying case*1

Technical Parameters:

Model		PH-DEC1
Conductivity	Range	0 to 19.99mS/cm, auto divided by range
	Resolution	0.1/1μS/cm, 0.01 mS/cm
	Accuracy	±1.0% F.S ± one digit
	Calibration Points	1 point
TDS	Range	0.1 ppm to 10.0 ppt
	TDS Factor	0.40 to 1.00
Salinity	Range	0~10ppt
Resistivity	Range	50Ω·cm to 20MΩ·cm
Temperature	Range	0~60°C(32~140°F)
	Accuracy	±0.2°C
Power Requirements		4×1.5V AAA alkaline batteries
External Size (W*D*H)		38*36*195mm
Package Size (W*D*H)		330*280*130mm
Net Weight		147g
Gross Weight		1kg

Pocket Conductivity Tester



Features:

- * An economic model for measuring the conductivity of general river water and sewage.
- * Ultra-small and ultra-thin shape design, electrode diameter 10mm.
- * Excellent functions: automatic correction, automatic shutdown, low voltage alarm and other intelligent functions.
- * Reliable design: in line with IP57 waterproof grade, dustproof and waterproof, replaceable electrode.
- * Can be used continuously for more than 30 hours.Can be used continuously for more than 30 hours.

Accessories:

Conductivity electrode; two button batteries; instruction book; packing box.

Technical Parameters:

Model		PH-P310
Conductivity	Range	(0~200)mS/cm
	Automatic Switching Range	(0~100)μS/cm
		(100~1000)μS/cm
		(1.00~10.00)mS/cm (10.00~100.00)mS/cm
		(100~200)mS/cm
Conductivity	Resolution	0.1/1μS/cm: 0.01 mS/cm
	Accuracy	±1.5% FS
	Calibration Points	1 point
	Power Requirements	Button battery*2
Temp. Compensation		0~99.9°C(Manual)
IP Grade		IP57
External Size(W*D*H)		185*50*20mm
Package Size(W*D*H)		210*65*50mm
Net Weight		0.03kg
Gross Weight		0.2kg

Portable Conductivity Meter

Features:

- * 7-inch color high-resolution(1024*600) capacitive touchscreen with intuitive UI and navigational operation, offering high sensitivity and comprehensive parameter display for user-friendly experience.
- * The main unit housing is PEEK material, featuring high temperature resistance, corrosion resistance, and aging prevention.
- * Built-in ARM 32-bit microprocessor with digital filtering and slip difference technology for enhanced response speed and measurement accuracy. Circuit boards use SMT assembly, improving reliability.
- * Complies with international GLP standards, offering auto-calibration, auto-temperature compensation, data storage, USB output, clock display, wireless printing, function settings, and self-diagnostics.
- * Stores 500 sets of measurements; data transfer via USB drive, compatible with Excel for analysis.
- * USB interface enables data export to computers; dedicated software optional for PC connectivity and data management.
- * Optional Bluetooth module supports wireless printing.
- * Automatically identifies 8 conductivity standard solutions. Utilizes advanced conductivity measurement technology, requiring only one-point calibration.
- * Rated IP54 for dust and splash resistance.

Accessories:

Meter; platinum black electrode; temperature electrode; power adapter; electrode holder(With base); carrying case

Technical Parameters:

Model		PH-P702
Conductivity	Range	200μS/cm~20mS/cm(K=1.0cm ⁻¹) Optional: 0.05~1μS/cm(K=0.01cm ⁻¹) 1μS/cm~200μS/cm(K=0.1cm ⁻¹) 20mS/cm~200mS/cm(K=10cm ⁻¹)
	Resolution	0.001/0.01/0.1/1μS/cm; 0.01/0.1mS/cm
	Accuracy	±1.5%FS
	Accuracy	±1.5%FS
Resistivity	Range	0~100MΩ·cm
	Resolution	1/0.1/0.01MΩ·cm
	Accuracy	±1.5%FS
TDS	Range	0~100g/L
	Resolution	1/0.1/0.01g/L or mg/L
	Accuracy	±1.5%FS
Salinity	Range	0~100ppt
	Resolution	1/0.1ppt
	Accuracy	±1.5%FS
Temperature	Range	0~100℃
	Resolution	0.1℃
	Accuracy	±0.5℃(5~60℃); ±1.0℃(Other ranges)
Display		7-inch touchscreen
Data Storage		500 groups
Communication Interface		USB2.0, optional Bluetooth module
Power Requirements		3.7V/1800mA rechargeable lithium battery
External Size(W*D*H)		195*135*40mm
Package Size(W*D*H)		480*385*250mm
Net Weight		600g
Gross Weight		4.5kg

Benchtop Conductivity Meter



Application:

Suitable for water quality monitoring, ecological research, sewage treatment, industrial and mining enterprises, agriculture, pharmaceuticals, education, and other applications for sampling and measuring the total ion concentration of solutions.

Features:

- * 7.0-inch LCD touch screen for intuitive and clear data display.
- * Supports storage of 500 data sets with options to save, review, and delete.
- * Features automatic endpoint detection with both equilibrium and continuous measurement modes.
- * Multi-functional electrode holder with multi-hole design, allowing simultaneous use of multiple electrodes and supporting 360-degree rotation and vertical adjustment.
- * Comes with a 1.0 constant electrode, enabling full-range measurement and supporting 1~5-point calibration for conductivity electrodes.

Accessories:

Meter; electrode, electrode holder; power adapter

Technical Parameters:

Model		BK-EC3A	BK-EC3B
Conductivity	Range	0.00μS/cm~200mS/cm	
	Resolution	0.01μS/cm, selectable according to the range	
	Electronic Unit Repeatability	0.33%FS	
	Instrument Repeatability	0.70%FS	
	Electronic Unit Reference Error	±1.0%FS	
	Instrument Reference Error	±1.5%FS	
TDS	Range	0.00mg/L~100g/L	
	Resolution	0.01mg/L, selectable according to the range	
	Electronic Unit Reference Error	±1.0%FS	
Resistivity	Range	5.00Ω·cm~20.0MΩ·cm	
	Resolution	0.01Ω·cm, selectable according to the range	
	Electronic Unit Reference Error	±1.0%FS	
Salinity	Range	0~100ppt	
	Resolution	0.01ppt	
	Accuracy	±0.2%	
Temperature	Range	/	-5.0~110.0℃
	Resolution	/	0.1℃
	Accuracy	/	±0.4℃(0.0~60.0℃) ±1.0℃(Other ranges)
Temp. Compensation Range		-5.0~110.0℃, manual	-5.0~110.0℃, manual/automatic
Power Requirements		AC 100~240V, 50/60Hz	
External Size(W*D*H)		250*190*71mm	
Package Size(W*D*H)		300*310*300mm	
Net Weight		1.5kg	
Gross Weight		2.2kg	

Benchtop Conductivity Meter



Introductio:

Suitable for water quality monitoring, ecological research, sewage treatment, industrial and mining enterprises, agriculture pharmaceuticals, education, and other applications.

Features:

- * High-res LCD display screen.
- * With built-in microprocessor chip, automatic calibration, automatic temperature compensation, data storage, parameter setup, etc.
- * Automatic calibration, self-diagnosis, automatically recognizing standard buffer solutions, conductivity calibration point: 1pt.
- * Fast response, high accuracy, stable reading display.
- * The kit comes with an ATC plastic cond. probe.
- * IP54 dustproof and spillproof.

Accessories:

- * Meter
- * Glass ATC Cond probe(K=1)
- * Standard Cond solution: 50mL: 84µS/1413µS/12.88mS/cm, one for each
- * Flexible probe holder
- * Power adaptor

Technical Parameters:

Model		BK-EC100
Conductivity	Range	0~200.0mS/cm, auto divided by range of: 0~19.99µS/cm; 20.0~199.9µS/cm; 200~1999µS/cm; 2.00~19.99mS/cm; 20.00~199.9mS/cm
	Resolution	0.001
	Accuracy	±1.0 % FS ± one digit
TDS	Range	0~100.0g/L
	Resolution	0.001
	Accuracy	±1.0 % FS ± one digit
Resistivity	Range	5.00~100.0MΩ·cm
	Resolution	0.001
	Accuracy	±1.0 % FS ± one digit
Salinity	Range	0~100.0ppt
	Resolution	0.1
	Accuracy	±1.0 % FS ± one digit
Temperature	Range	-9.9~130.0°C/14.1~266.0°F
	Resolution	0.1°C
	Accuracy	±0.2°C
Data Storage		450 groups
Data Transfer		USB stick Bluetooth connection to printer(Optional)
Power Requirements		DC12V
External Size(W*D*H)		200*170*64mm
Package Size(W*D*H)		540*330*130mm
Net Weight		550g
Gross Weight		2.2kg

Portable pH/ORP Meter



Measurement Parameters:

PH-220: pH, mV, temperature
 PH-221: pH, mV, relative mV, temperature

PH-220 Features:

- * 1 to 3 points calibration with automatic recognition for USA and NIST buffers.
- * Automatic electrode diagnosis helps user decide whether to replace the pH electrode.
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Auto-Read function senses and locks the measurement endpoint.
- * Setup menu allows setting the pH buffer set, number of calibration points, temperature unit, auto-power off, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Expanded memory stores or recalls up to 100 data sets.
- * USB communication interface for data transfer or connecting a power adapter to meter.

PH-221 Features:

- pH**
- * 1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers.
 - * Automatic electrode diagnosis shows the pH slope and offset.
 - * Automatic temperature compensation ensures accurate readings over the entire range.
 - * Calibration due alarm prompts user to calibrate the meter regularly.
- ORP**
- * 1 point offset calibration allows adjusting the displayed value to a known standard
 - * Relative and absolute millivolt modes ensure the reliable ORP measurements
- General Features**
- * Auto-Read function senses and locks the measurement endpoint
 - * Auto-Power Off effectively conserves battery life
 - * Setup menu allows setting the pH buffer set, number of calibration points, resolution, stability criteria, temperature unit, date and time, etc.
 - * Reset function automatically resumes all settings back to the factory defaults
 - * Expanded memory stores or recalls up to 500 data sets
 - * USB communication interface is easy to transfer data to PC
 - * Multi-mode power scheme (batteries, power adapter and USB port) ensures that using the meter smoothly

Accessories:

- * PH electrode
- * Temperature probe
- * PH buffer solutions (pH4.01/7.00/10.01)
- * Carrying case

Technical Parameters:

Model		PH-220	PH-221
pH	pH Range	-2.00~20.00pH	-2.000~20.000pH
	pH Accuracy	±0.01pH	±0.002pH
	Resolution	0.01pH	0.1, 0.01, 0.001pH, Selectable
	Calibration Points	1 to 3 points	1 to 5 points
	pH Buffer Options	USA (4.01/7.00/10.01), NIST (4.01/6.86/9.18)	USA (pH1.68/4.01/7.00/10.01/12.45), NIST (pH1.68/4.01/6.86/9.18/12.45), DIN (pH1.09/4.65/6.79/9.23/12.75) or 2 custom buffers
ORP	mV Range	-1999~1999mV	-1999.9~1999.9mV
	mV Accuracy	±1mV	±0.2mV
	Resolution	1mV	0.1, 1mV, Selectable
	Calibration Points	/	1 point
Temperature	Temperature Range	0~105°C/32~221°F	
	Temperature Accuracy	±0.5°C/±0.9°F	
	Resolution	0.1°C/0.1°F	
	Offset Calibration	1 point, reading ±10°C	
Other Specifications	Temperature Compensation	0~100°C, manual or automatic	
	Stability Criteria	/	Low or high
	Calibration Due Alarm	/	1 to 31 days or off
	Slope/Offset Display	Yes	
	Hold Function	Manual or auto-endpoint	
	Auto-Off	30 minutes after last key pressed	10, 20 or 30 minutes after last key pressed
	Memory	100 data sets	500 data sets
	Communication Interface	USB	
	Connector	BNC, 3.5 mm jack socket	
	Display	Custom LCD (80 × 60 mm)	
	Power Requirements	3*1.5V AA batteries or DC5V power adapter	
	Battery Life	Approximately 150 hours (Turn off the backlight)	
	Dimensions(W*D*H)	170*85*30mm	
	Package Size(W*D*H)	475*155*350mm	
	Net Weight	300g	
	Gross weight	2kg	

Portable pH/Ion Meter



Measurement Parameters:

PH-320: pH, mV, relative mV, ion concentration, temperature
 PH-321: Ion concentration, mV, temperature

Features:

- pH**
 * 1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers.
 * Automatic electrode diagnosis shows the pH slope and offset.
ORP
 * 1 point offset calibration allows adjusting the displayed value to a known standard.
 * Relative and absolute millivolt modes ensure the reliable ORP measurements.
Ion Concentration
 * 2 to 5 points calibration, including the 8 concentration points can be selected.
 * Direct ion concentration readout simplifies the measurement process.
 * Automatic electrode diagnosis shows the calibration points and slopes.
 * Selectable concentration units (ppm, mg/L, mol/L, mmol/L) and ionic valency.

General Features:

- * Automatic temperature compensation ensures accurate readings over the entire range.
 * Auto-Read function senses and locks the measurement endpoint.
 * Calibration due alarm prompts user to calibrate the meter regularly.
 * Auto-Power Off effectively conserves battery life.
 * Setup menu allows setting the number of calibration points, resolution, stability criteria, temperature unit, date and time, etc.
 * Reset function automatically resumes all settings back to the factory defaults.
 * Expanded memory stores or recalls up to 500 data sets.
 * USB communication interface is easy to transfer data to PC.
 * Multi-mode power scheme (batteries, power adapter and USB port) ensures that using the meter smoothly.

Optional Ion Selective Electrodes:

Ammonium (NH₄⁺), bromide (Br⁻), cadmium (Cd²⁺), calcium (Ca²⁺), chloride (Cl⁻), cupric (Cu²⁺), cyanide (CN⁻), fluoride (F⁻), iodide (I⁻), lead (Pb²⁺), nitrate (NO₃⁻), potassium (K⁺), silver (Ag⁺), sodium (Na⁺), sulphide (S²⁻) and ammonia (NH₃)

Accessories:

- * PH-320: Meter, PH electrode, temperature probe, PH buffer solutions(pH4.01/7.00/10.01), carrying case
 * PH-321: Meter, ion selective electrode, temperature probe, standard solutions (100/1000ppm), ionic strength adjuster and carrying case



Technical Parameters:

Model	PH-320	PH-321
pH	pH Range	-2.000~20.000pH
	pH Accuracy	±0.002pH
	Resolution	0.1, 0.01, 0.001pH, Selectable
	Calibration Points	1~5 points
	pH Buffer Options	USA(pH1.68/4.01/7.00/10.01/12.45), NIST(pH1.68/4.01/6.86/9.18/12.45), DIN(pH1.09/4.65/6.79/9.23/12.75) or 2 custom buffers
ORP	mV Range	-1999.9~1999.9mV
	Relative mV Range	-1999.9~1999.9mV
	mV Accuracy	±0.2mV
	Resolution	0.1, 1mV, Selectable
	Calibration Points	1 point(Only for Relative mV mode)
Ion	Ion Concentration Range	0.001~19999(Depending on the range of ISE)
	Ion Concentration Accuracy	±0.5% F.S(Monovalent),±1% F.S(Divalent)
	Calibration Points	2~5 points
	Calibration Solutions	0.001, 0.01, 0.1, 1, 10, 100, 1000, 10000(ppm, mg/L, mol/L, mmol/L)
Temperature	Temperature Range	0~105°C/32~221°F
	Temperature Accuracy	±0.5°C/±0.9°F
	Resolution	0.1°C/0.1°F
	Offset Calibration	1 point, reading ±10°C
Other Specifications	Temperature Compensation	0~100°C, manual or automatic
	Stability Criteria	Low or high
	Calibration Due Alarm	1 to 31 days or off
	Slope/Offset Display	Yes
	Hold Function	Manual or auto-endpoint
	Auto-Off	10, 20 or 30 minutes after last key pressed
	Memory	500 data sets
	Communication Interface	USB
	Connector	BNC, 3.5 mm jack socket
	Display	Custom LCD(80*60mm)
	Power Requirements	3*1.5V AA batteries or DC5V power adapter
	Battery Life	Approximately 150 hours(Turn off the backlight)
	External Size(W*D*H)	170*85*30mm
	Package Size(W*D*H)	475*155*350mm
	Net Weight	300g
	Gross weight	2kg

Benchtop pH/ORP/Ion Meter



pH:

- * 1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers.
- * Automatic electrode diagnosis shows the pH slope and offset.
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Calibration due alarm prompts user to calibrate the meter regularly.

ORP:

- * 1 point offset calibration allows adjusting the displayed value to a known standard.
- * Relative and absolute millivolt modes ensure the reliable ORP measurements.
- * 2 to 5 points calibration, including the 8 concentration points can be selected.
- * Direct ion concentration readout simplifies the measurement process.
- * Automatic electrode diagnosis shows the calibration points and slopes.
- * Selectable concentration units (ppm, mg/L, mol/L, mmol/L) and ionic valency.

General Features

- * Auto-Read function senses and locks the measurement endpoint.
- * Setup menu allows setting the pH buffer set, number of calibration points, resolution, stability criteria, temperature unit, date and time, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Expanded memory stores or recalls up to 500 data sets.
- * USB communication interface for data transfer and timed interval readings.

Accessories:

E201-BNC plastic body pH electrode, temperature probe, pH buffer sachets, electrode holder, DC5Vpower adapter.

Technical Parameters:

Model		PH-920	PH-930
PH	Range	-2.000~20.000pH	
	Accuracy	±0.002pH	
	Resolution	0.1, 0.01, 0.001pH, Selectable	
	Calibration Points	1~5 points	
	Calibration Solutions	USA, NIST, DIN, 2 custom buffers	
ORP	MV Range	±1999.9mV	
	Relative mV Range	±1999.9mV	
	Resolution	0.1, 1mV, Selectable	
	MV Accuracy	±0.2mV	
	Calibration Points	1 point	
Ion	Range	/	0.001~19999ppm, mg/L, mol/L (depending on the range of ISE)
	Resolution	/	0.001, 0.01, 0.1, 1
	Accuracy	/	±0.5% F.S (Monovalent), ±1% F.S (Divalent)
	Measurement Units	/	ppm, mg/L, mol/L, mmol/L
	Calibration Points	/	2 to 5 points
Temperature	Calibration Solutions	/	0.001, 0.01, 0.1, 1, 10, 100, 1000, 10000
	Range	0~105°C/32~221°F	
	Resolution	0.1°C/0.1°F	
	Accuracy	±0.5°C/±0.9°F	
	Offset Calibration	1 point, reading ±10°C	
Other Specifications	Temperature Compensation	0~100°C, Manual or Automatic	
	Stability Criteria	Low or high	
	Calibration Due Alarm	1 to 31 days or off	
	Slope/Offset Display	Yes	
	Hold Function	Manual or auto-endpoint	
	Memory	500 data sets	
	Communication Interface	USB	
	Connector	BNC, 3.5mm jack socket	
	Display	Custom LCD (125*100mm)	
	Power Requirements	DC5Vpower adapter	
	Dimensions(mm)	210*188*60mm	
	Weight(kg)	1.5kg	
	Package Size(W*D*H)mm	310*240*180mm	
	Gross weight(kg)	1.7kg	

Portable Conductivity/TDS/Salinity Meter



PH-520 Features:

- * 1 to 3 points calibration with automatic recognition for conductivity standards.
- * Automatic electrode diagnosis shows the calibration points and factors .
- * Selectable cell constant, reference temperature, linear/non-linear and pure water compensation modes.
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Auto-Read function senses and locks the measurement endpoint.
- * Setup menu allows setting the number of calibration points, temperature unit, auto-power off, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Expanded memory stores or recalls up to 100 data sets.
- * USB communication interface for data transfer orconnecting a power adapter to meter.

PH-530/531/540 Features:

- * 1 to 5 points calibration with automatic recognition for conductivity standards.
- * Automatic electrode diagnosis shows the calibration points and factors.
- * Selectable cell constant, reference temperature, TDS factor, linear and pure water compensations, seawater and practical salinity measurement modes.
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Auto-Read function senses and locks the measurement endpoint.
- * Calibration due alarm prompts user to calibrate the meter regularly.
- * Auto-Power Off effectively conserves battery life.
- * Setup menu allows setting the number of calibration points, stabilitycriteria,temperature unit, date and time, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Expanded memory stores or recalls up to 500 data sets.
- * USB communication interface is easy to transfer data to PC.
- * Multi-mode powerscheme (batteries, power adapter and USB port) ensures that using the meter smoothly.

Accessories:

Meter, CON-1 conductivity electrode, temperature probe, standard solutions and carrying case.

Technical Parameters:

Model		PH-520	PH-530	PH-531	PH-540
Conductivity	Range	Standard	CON-1: 2μs/cm~20000μs/cm		
		Optional	CON-0.01: 0.01μs/cm~0.1μs/cm; CON-0.1: 0.1μs/cm~2μs/cm; CON-10: 20000μs/cm~200ms/cm		
	Accuracy		±0.5% F.S.		
	Resolution		0.001, 0.01, 0.1, 1		
	Calibration Points		1 to 3 points (PH-520), 1 to 5 points (PH- 530/531/540)		
	Calibration Solutions		10μS/cm, 84μS/cm, 1413μS/cm, 12.88mS/cm, 111.8mS/cm		
TDS	Range	/	0~10.00, 100.0, 1000ppm, 10.00, 200.0ppt	/	0~10.00, 100.0, 1000ppm, 10.00, 200.0ppt
	Accuracy	/	±1% F.S.	/	±1% F.S.
	Resolution	/	0.01, 0.1, 1	/	0.01, 0.1, 1
	TDS Factor	/	0.1~1.0 (default 0.5)	/	0.1~1.0 (default 0.5)
Salinity	Range	/		0.00~42.00psu,0.00~80.00ppt	
	Accuracy	/		±1% F.S.	
	Resolution	/		0.01	
Resistivity	Range	/			0.00~20.00MΩ
	Accuracy	/			±1% F.S.
	Resolution	/			0.01
Temperature	Range	0~105°C/32~221°F			
	Accuracy	±0.5°C/±0.9°F			
	Resolution	0.1°C/0.1°F			
	Offset Calibration	1 point, reading ±10°C			
Other Specifications	Temperature Compensation	0~100°C, manual or automatic			
	Temperature Coefficient	Linear (0.0~10.0%/°C), non-linear, pure water			
	Reference Temperature	20/25°C			
	Cell Constant	K=0.1, 1, 10			
	Stability Criteria	/	Low or high		
	Calibration Due Alarm	/	1 to 31 days or off		
	Hold Function	Manual or auto-endpoint			
	Auto-Off	30 minutes after last key pressed (PH-520), 10, 20 or 30 minutes after last key pressed (PH-530/531/540)			
	Memory	100 data sets(PH-520), 500 data sets(PH-530/531/540)			
	Communication Interface	USB			
	Connector	6-pin mini-DIN, 3.5mm jack socket			
	Display	Custom LCD (80*60mm)			
	Power Requirements	3× 1.5V AA batteries or DC5V power adapter			
	Battery Life	Approximately 150 hours (Turn off the backlight)			
	Dimensions(mm)	170*85*30mm			
	Weight(kg)	300g			
	Package Size(W*D*H)mm	475*155*350mm			
	Gross weight(kg)	2kg			

Portable Multiparameter Meter



- Features:**
- * 3.5-inch color screen, user-friendly interface.
 - * Data logging up to 3000 groups.
 - * Cal points: pH: 1-3pts; Cond: 1pt; DO: 100% Oxygen or Zero oxygen calibration.
 - * Equipped with a USB Type-C charging port, conforms with the EU new law.
 - * Ideal for use in harsh environments — IP57 Waterproof and Dustproof rating, silicone socket protector and grip cover protect the instrument from general impact.
 - * Large backlit LCD displays measuring value and temp. along with icons of stable readings.
 - * Foldable stand allows use as a benchtop meter.
 - * For general liquid test.

Accessories:

PH-PC10: Meter; plastic ATC pH electrode D201T-H; pH buffer solution: 4.00/7.00/10.01 50mL, one for each; plastic Cond electrode;(K=1.0, PC housing, for general liquid test); standard Cond solution: 84uS/1413uS/12.88mS/cm, 50mL, one for each; Type-C charger cable; hard carrying case

PH-CD10: Meter; POM DO electrode; DO refill solution: 30mL*1; DO replacement sensor caps*3; plastic Cond electrode (K=1, PC housing, for general liquid test); standard Cond solution: 84uS/1413uS/12.88mS/cm, 50mL, one for each; USB-C charger cable; hard carrying case

PH-PD10: Meter; plastic ATC pH electrode1; pH buffer solution: 4.00/7.00/10.01 50mL, one for each; POM DO electrode; DO refill solution: 30mL*1; DO replacement sensor caps*3; USB Type-C charger cable; hard carrying case

Technical Parameters:

Model		PH-PC10	PH-CD10	PH-PD10
pH	Range	-2.000~20.000pH	/	-2.000~20.000pH
	Resolution	0.01/0.1/0.001pH	/	0.01/0.1/0.001pH
	Accuracy	±0.002pH±one digit	/	±0.002pH±one digit
mV(ORP probe optional)	Range	-1999mV~1999mV	/	-1999mV~1999mV
	Resolution	0.1mV	/	0.1mV
	Accuracy	±0.03% FS±one digit	/	±0.03% FS±one digit
Conductivity	Range	0~2000.0mS/cm(Auto divided: 0~19.999μS/cm; 20.0~199.9μS/cm, 200~1999μS/cm; 2.00~19.99μS/cm; 20.00~199.9μS/cm; 200.0~2000μS/cm), match test range: 0~200.0mS/cm		/
	Resolution	0.001/0.01/0.1/1		/
	Accuracy	±0.5%FS±one digit		/
	ATC Range	0~50℃		/
TDS	Range	0~1000.0g/L(TDS factor adjustable)		/
	Resolution	0.001/0.01/0.1/1		/
	Accuracy	±0.5%FS±one digit		/
	ATC Range	0~50℃		/
Resistivity	Range	5.000~100.0MΩ·cm		/
	Resolution	0.001/0.01/0.1/1		/
	Accuracy	±0.5%FS±one digit		/
	ATC Range	0~50℃		/
Salinity	Range	0~100.0ppt		/
	Resolution	0.001/0.01/0.1/1		/
	Accuracy	±0.5%FS±one digit		/
	ATC Range	0~50℃		/
DO	Range	/	0~20.00mg/L, 0~200.0 %	
	Resolution	/	0.01 or 0.1 mg/L	
	Accuracy	/	±0.30 mg/L	
	ATC Range	/	0~50℃ automatically	
	Salinity Compensation	/	0~45ppt manual	
	Barometric Compensation	/	0~200kPa automatically	
Temperature	Range	-10.0~135.0℃/14.0~275.0°F		
	Resolution	0.1℃		
	Accuracy	±0.2℃		
Data Storage/Content		3000 groups(Serial number, mode, measuring value, temp, date: Y/M/D/H/M)		
Data Export/Charging Port		Type-C - USB		
PC Software Function		GLP measurement management Two-level user management The user's operation history log Meter usage management Automatically /manually timing data storage		
Power Requirements		Rechargeable lithium battery*1		
External Size(W*D*H)		79*32*204mm		
Package Size(W*D*H)		380*330*130mm		
Net Weight		305g		
Gross Weight		3kg		

Benchtop Conductivity/TDS/Salinity/Resistivity Meter



Features:

- * 1 to 5 points calibration with automatic recognition for conductivity standards.
- * Automatic electrode diagnosis shows the calibration points and factors.
- * Selectable cell constant, reference temperature, TDS factor, linear and pure watercompensations, seawater and practical salinity measurement modes.
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Auto-Read function senses and locks the measurement endpoint.
- * Calibration due alarm prompts user to calibrate the meter regularly.
- * Set up menu allows setting the number of calibration points, stability criteria,temperature unit, date and time, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Expanded memory stores or recalls up to 500 data sets.
- * USB communication interface for data transfer and timed interval readings.


Accessories:

Meter, CON-1 conductivity electrode, temperature probe, standard solutions, electrode holder, USB cable and power adapter.

Technical Parameters:

Model			PH-950
Conductivity	Range	Standard	CON-1: 2μs/cm~20000μs/cm
		Optional	CON-0.01: 0.01μs/cm~0.1μs/cm; CON-0.1: 0.1μs/cm~2μs/cm; CON-10: 20000μs/cm~200ms/cm
	Accuracy		±0.5% F.S.
	Resolution		0.001, 0.01, 0.1, 1
	Calibration Points		1 to 5 points
TDS	Calibration Solutions		10μS/cm, 84μS/cm, 1413μS/cm, 12.88mS/cm, 111.8mS/cm
	Range		0~10.00, 100.0, 1000ppm, 10.00, 200.0ppt
	Accuracy		±1% F.S.
	Resolution		0.01, 0.1, 1
Salinity	TDS Factor		0.1~1.0 (default 0.5)
	Range		0.00~42.00psu,0.00~80.00ppt
	Accuracy		±1% F.S.
Resistivity	Resolution		0.01
	Range		0.00~20.00MΩ
	Accuracy		±1% F.S.
Temperature	Resolution		0.01
	Range		0~105°C/32~221°F
	Accuracy		±0.5°C/±0.9°F
Other Specifications	Resolution		0.1°C/0.1°F
	Offset Calibration		1 point, reading ±10°C
	Temperature Compensation		0~100°C, manual or automatic
	Temperature Coefficient		Linear (0.0~10.0%/°C), non-linear, pure water
	Reference Temperature		20/25°C
	Cell Constant		K=0.1, 1, 10
	Stability Criteria		Low or high
	Calibration Due Alarm		1 to 31 days or off
	Calibration Factor Display		Yes
	Hold Function		Manual or auto-endpoint
	Memory		500 data sets
	Communication Interface		USB
	Connector		6-pin mini-DIN, 3.5mm jack socket
	Display		Custom LCD (125*100mm)
	Power Requirements		DC5V power adapter
	Dimensions(mm)		210*188*60mm
	Weight(kg)		1.5kg
	Package Size(W*D*H)mm		310*240*180mm
	Gross weight(kg)		1.7kg

Benchtop Multiparameter Meter

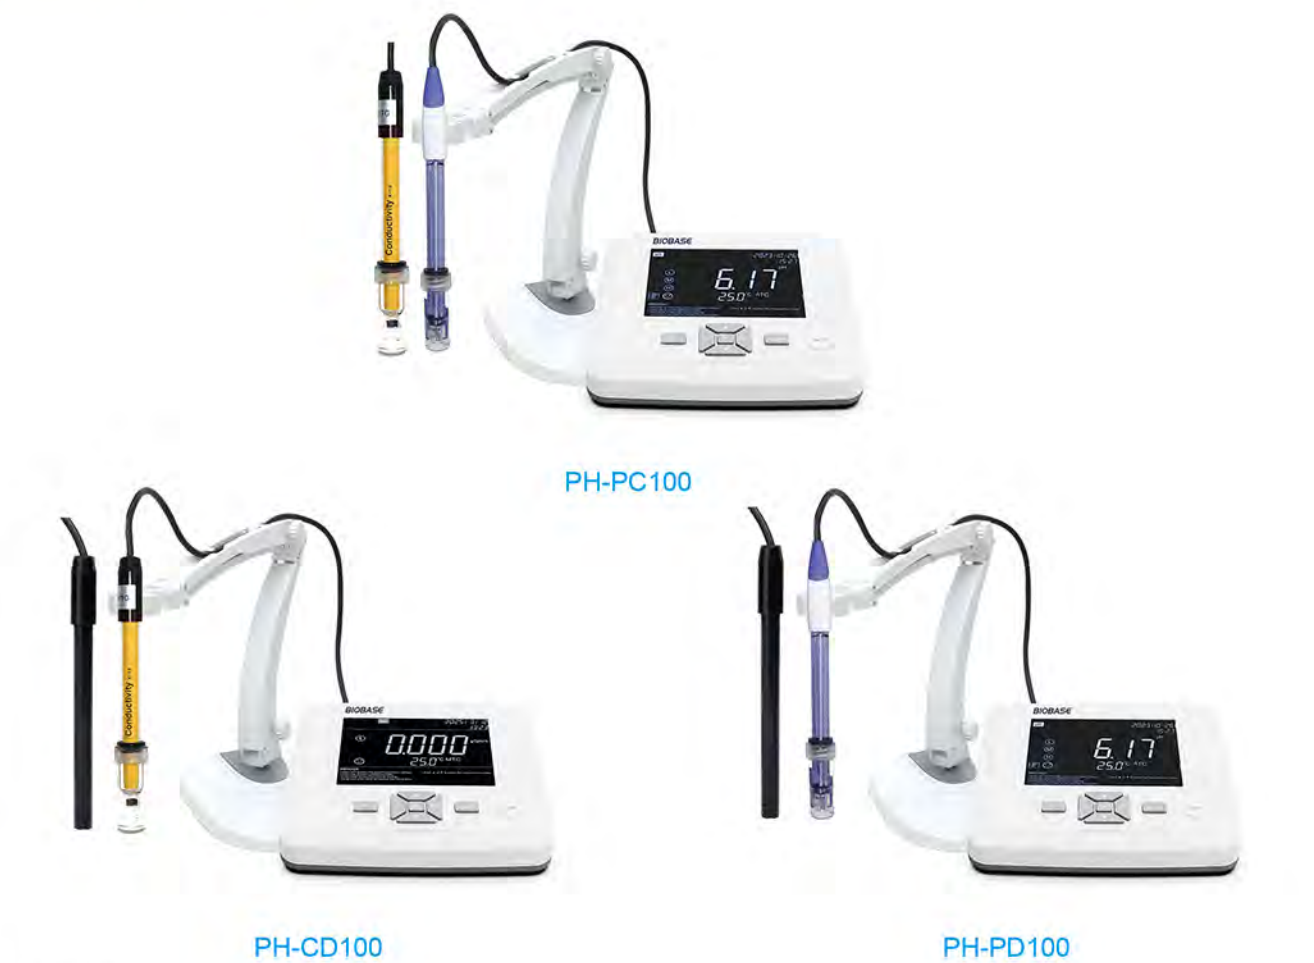

- Features:**
- * High-resolution LCD display screen.
 - * With built-in microprocessor chip, automatic calibration, automatic temperature compensation, data storage, parameter setup, etc.
 - * Automatic calibration, self-diagnosis, automatically recognizing standard buffer solutions.
 - * pH calibration: 1-3pts, conductivity calibration point: 1pt, DO: 100% Oxygen or Zero oxygen calibration.
 - * Fast response, high accuracy, stable reading display.
 - * IP54 dustproof and spillproof.

Accessories:

PH-PC100: Meter; ATC pH probe; pH buffer solution: pH4.00/7.00/10.01, 50mL, one for each; glass ATC Cond probe(K=1); standard Cond solution: 50mL: 84μS/1413μS/12.88mS/cm, one for each; flexible probe holder; power adaptor

PH-CD100: Meter; glass ATC Cond probe(K=1); standard Cond solution: 50mL: 84μS/1413μS/12.88mS/cm, one for each; polarographic DO probe, cable length: 2m; membrane refill solution: 30mL; sensor caps: 3pcs/group, 1pkg; flexible probe holder; power adaptor

PH-PD100: Meter; ATC pH probe; pH buffer solution: pH4.00/7.00/10.01, 50mL, one for each; polarographic DO probe, cable length: 2m; membrane refill solution: 30mL; sensor caps: 3pcs/group, 1pkg; flexible probe holder; power adaptor: 1pc

Technical Parameters:

Model		PH-PC100	PH-CD100	PH-PD100
pH	Range	-2.000~20.000pH	/	-2.000~20.000pH
	Resolution	0.01/0.1pH	/	0.01/0.1pH
	Accuracy	±0.01pH ± one digit	/	±0.01pH ± one digit
mV (ORP probe optional)	Range	-1999mV~1999mV	/	-1999mV~1999mV
	Resolution	1mV	/	1mV
	Accuracy	±0.1%FS ± one digit	/	±0.1%FS ± one digit
Conductivity	Range	0~200.0mS/cm(Auto divided: 0~19.99μS/cm; 20.0~199.9μS/cm; 200~1999μS/cm; 2.00~19.99mS/cm; 20.00~199.9mS/cm		/
	Resolution	0.001		/
	Accuracy	±1.0%FS ± one digit		/
	ATC Range	0~50℃		/
TDS	Range	0~100.0g/L		/
	Resolution	0.001		/
	Accuracy	±1.0%FS ± one digit		/
	ATC Range	0~50℃		/
Resistivity	Range	5.00~100.0MΩ·cm		/
	Resolution	0.001		/
	Accuracy	±1.0%FS ± one digit		/
	ATC Range	0~50℃		/
Salinity	Range	0~100.0ppt		/
	Resolution	0.1		/
	Accuracy	±1.0%FS ± one digit		/
	ATC Range	0~50℃		/
DO	Range	/	0~20.00mg/L, 0~200.0 %	
	Resolution	/	0.01mg/L	
	Accuracy	/	±0.30mg/L	
	ATC Range	/	0~50℃, automatically	
	Salinity Compensation	/	0~45ppt, manual	
	Barometric Compensation	/	0~200kPa, automatically	
Temperature	Range	-9.9~130.0℃/14.1~266.0°F		
	Resolution	0.1℃		
	Accuracy	±0.2℃		
Data Storage		450 groups		
Data Transfer		USB stick		
		Bluetooth connection to printer(Optional)		
Power Requirements		DC12V		
External Size(W*D*H)		200*170*64mm		
Package Size(W*D*H)		600*430*130mm		
Net Weight		550g		
Gross Weight		2.5kg	2.3kg	2.4kg

Portable Dissolved Oxygen Meter



Introduction:

The portable dissolved oxygen meter is a precision handheld instrument designed for rapid detection of dissolved oxygen (DO) content in water bodies. It is easy to operate, delivers accurate results, and is highly portable, supporting on-site testing in outdoor environments. It enables users to monitor water quality dynamics in a timely manner and is widely used in environmental protection, aquaculture, scientific research, education, and wastewater treatment.

Accessories:

- Meter
- DO electrode
- Power adapter DC 5V 2A
- Electrode holder
- Micro USB cable
- Wristband assembly(Small)

Features:

- * LCD display screen, 3.5 inches.
- * Multi-reading feature allows auto-read and continuous-read.
- * Automatic/Manual temperature compensation ensures accurate results.
- * Auto-hold feature senses and locks the measurement endpoint.
- * Data capacity of up to 200 sets for each parameter.
- * Auto-power off feature effectively extends the battery service life.
- * Reset feature automatically resumes all settings back to factory default options.
- * Support for air-saturated water or zero oxygen calibration
- * Manual barometric pressure compensation.
- * Manual salinity factor correction.
- * IP65 waterproof. The portable meter is suitable for fields measurements and outdoor measurements.

Technical Parameters:

Model		DO210E
DO Concentration	Range	0.00~20.00mg/L
	Resolution	0.01mg/L
	Accuracy	±0.3mg/L
	Calibration Points	Air-saturated water or zero point
	Barometric Compensation	Yes
	Manual Salinity Factor Correction	Yes
DO Saturation	Range	0.0~200.0%
	Resolution	0.1%
	Accuracy	±2.0%
Temperature	Range	-5~110°C, 23~230°F
	Resolution	0.1
	Relative Accuracy	±0.2
Measurement	Reading Mode	Auto read, continuous
	Reading Prompts	Reading, stable, connector
	Temp. Compensation	ATC, MTC
Data Storage		200 result each
Auto Shutdown		300, 600, 1200, 1800, 3600sec. off
Power Requirements		Rechargeable lithium battery, AC adapter, 100~240V AC input, DC5V output
External Size(W*D*H)		80*35*255mm
Package Size(W*D*H)		300*290*140mm
Net Weight		400g
Gross Weight		1kg

Portable Dissolved Oxygen Meter



PH-820



PH-821

Features:

- * 1 or 2 points calibration using the air-saturated water or zero oxygen solution.
- * Salinity and barometric pressure compensations eliminate the measurement error.
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Auto-Read function senses and locks the measurement endpoint.
- * Auto-Power Off effectively conserves battery life.
- * Setup menu allows setting the number of calibration points, resolution, temperature unit, concentration unit, stability criteria, date and time, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Expanded memory stores or recalls up to 500 data sets.
- * USB communication interface for data transfer or connecting a power adapter to meter.

Accessories:

DO100 dissolved oxygen electrode, electrolyte solution, membrane cap and carrying case.

Technical Parameters:

Model		PH-820	PH-821
DO	Range	0.00~20.00mg/L, 0.0~200.0% saturation	
	Accuracy	±0.5mg/L, ±2.0%	±0.2mg/L, ±2.0%
	Resolution	0.01mg/L, 0.1%	
Other Specifications	Calibration Points	1 or 2 points	
	Temperature Compensation	0~50°C/32~122°F, automatic	
	Barometric Pressure Correction	60.0~112.5kPa/450~850mmHg, manual	
	Salinity Correction	0.0~50.0g/L, manual	
	Stability Criteria	/	Low or high
	Calibration Due Alarm	/	1 to 31 days or off
	Hold Function	Manual or auto-endpoint	
	Auto-Off	30 minutes after last key pressed	10, 20 or 30 minutes after last key pressed
	Memory	100 data sets	500 data sets
	Communication Interface	USB	
	Connector	6-pin mini-DIN	
	Display	Custom LCD (80*60mm)	
	Power Requirements	3× 1.5V AA batteries or DC5V power adapter	
	Dimensions(mm)	170*85*30mm	
	Weight(kg)	300g	
	Package Size(W*D*H)mm	475*155*350mm	
	Gross weight(kg)	1.7kg	

Benchtop Dissolved Oxygen Meter



Features:

- * With built-in microprocessor chip, intelligent and high accuracy.
- * 7" TFT touch screen, easy reading and operation.
- * With calibration guide, automatic calibration, automatic temperature compensation, data storage, parameter setup, etc.
- * Self-diagnosis functions.
- * Cal points: DO: 100% Oxygen or Zero oxygen calibration.
- * Fast response, stable reading display.
- * The kit comes with a polarographic type DO probe and 3pcs replaceable sensor caps, which is convenient for use in the long term.
- * IP54 dustproof and spillproof.

Accessories:

Meter; polarographic DO probe, cable length: 2m; membrane refill solution: 30mL; sensor caps: 3pcs/group, 1pkg; flexible probe holder; PC cable; power adaptor

Technical Parameters:

Model		PH-DO100T
DO	Range	0~20.00mg/L, 0~200.0 %
	Resolution	0.01/0.1mg/L
	Accuracy	±0.30mg/L
	ATC range	0~50℃, automatically
	Salinity Compensation	0~45ppt, manual
	Barometric Compensation	0~200.0kPa, automatically
Temperature	Range	-10.0~135.0℃/14.0~275.0°F
	Resolution	0.1℃
	Accuracy	±0.2℃
Data Storage		500 groups
Data Output		USB to Flash Disk
		USB to PC
		Wireless connection to printer(Optional)
Power Requirements		DC12V
External Size(W*D*H)		200*170*64mm
Package Size(W*D*H)		540*330*130mm
Net Weight		567g
Gross Weight		2.1kg

Benchtop Dissolved Oxygen Meter

Features:

- * High resolution LCD display, 5.7 inches.
- * Multi-reading feature allows auto-read, timed-read and continuous-read.
- * Automatic/manual temperature compensation ensures accurate results.
- * Auto-hold feature senses and locks the measurement endpoint.
- * Support for USB or RS-232 communication.
- * Reset feature automatically resumes all settings back to factory default options.
- * Support for air-saturated water or zero oxygen calibration.
- * Manual salinity factor correction
- * Selectable pressure unit, including kPa, mbar, Torr, Atm.
- * IP54 dustproof and spillproof.



Accessories:

Meter; polarographic DO electrode; electrode stand; power adapter DC 9V; dust cover; universal USB cable.

Technical Parameters:

Model		DO400F
DO Concentration	Sensor Type	Polarographic
	Range	0.00~99.99ppm
	Resolution	0.01ppm
	Accuracy	±0.10ppm, 0.00~50.00ppm ±0.50ppm, 50.0~99.99ppm
	Calibration Points	Air-saturated water or zero point
	Manual Salinity Factor Correction	Yes
DO Saturation	Barometric Compensation	Yes
	Range	0.0~600.0%
	Resolution	0.01%
	Accuracy	±2.0%
Temperature	Range	-10.0~135.0℃/14.0~275.0°F
	Resolution	0.1℃
	Accuracy	±0.1℃
Measurement	Reading Mode	Auto read(Fast, medium, slow), timed, continuous
	Reading Prompts	Reading, stable, locked
	Temp. Compensation	ATC, MTC
Data Management	Data Storage	500 results each
	GLP Features	Yes
Inputs	DO with Temp. Probe	4-pin aviation connector
Outputs	USB	PC
	RS232	Printer
Power Requirements		AC adapter, 100~240V, 50/60Hz AC input, DC9V output
External Size(W*D*H)		242*195*68mm
Package Size(W*D*H)		370*305*330mm
Net Weight		0.9kg
Gross Weight		2.5kg

Benchtop Dissolved Oxygen Meter



Features:

- * 1 or 2 points calibration using the air-saturated water or zero oxygen solution.
- * Salinity and barometric pressure compensations eliminate the measurement error.
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Auto-Read function senses and locks the measurement endpoint.
- * Setup menu allows setting the number of calibration points, concentration unit, temperature unit, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Calibration due alarm prompts user to calibrate the meter regularly.(only PH-980)
- * Set up menu allows setting the number of calibration points,resolution,stability criteria, temperature unit, concentration unit, date and time, etc.(only PH-980)
- * Expanded memory stores or recalls up to 500 data sets.(only PH-980)SD
- * USB communication interface for data transfer and timed interval readings.(only PH-980)

Accessories:

DO100 dissolved oxygen electrode, electrolyte solution, membrane cap and DC9V power adapter.

Technical Parameters:

Model		PH-810	PH-980
DO	Range	0.0~20.0mg/L or ppm	
	Accuracy	±0.5mg/L	±0.2mg/L
	Resolution	0.1mg/L	0.01, 0.1mg/L, selectable
% saturation	Range	0.0~200.0%	
	Accuracy	±2.0%	
	Resolution	1%	0.1, 1%, selectable
Temperature	Range	0~60°C/32~140°F	
	Accuracy	±1°C/±1.8°F	±0.5°C/±0.9°F
	Resolution	0.1°C/0.1°F	
	Offset Calibration	1 point, reading ±10°C	
Other Specifications	Dissolved Oxygen Calibration	1 or 2 points	
	Temperature Compensation	0~40°C, automatic	0~50°C, automatic
	Barometric Pressure Correction	60.0~112.5kPa/450~850mmHg, manual	
	Salinity Correction	0.0~35.0g/L, manual	0.0~50.0g/L, manual
	Stability Criteria	/	Low or high
	Calibration Due Alarm	/	1 to 31 days or off
	Hold Function	Manual or auto-endpoint	
	Memory	/	500 data sets
	Communication Interface	/	USB
	Connector	6-pin mini-DIN	
	Display	Custom LCD (120*60mm)	Custom LCD (125*100mm)
	Power Requirements	DC9V power adapter	DC5V power adapter
	Dimensions(mm)	210*205*75mm	210*188*60mm
	Weight(kg)	1.5kg	
	Package Size(W*D*H)mm	310*240*180mm	
	Gross weight(kg)	1.7kg	

Portable Water Hardness Meter



Features:

- * Features a 4.3-inch color LCD screen with an intuitive GUI graphic navigation and a membrane keypad design. The keys are thin, soft, and highly durable, capable of withstanding over 1 million presses. The layout is rich, intuitive, and easy to understand, guiding users through effortless operation.
- * The instrument is compact, lightweight, operable with one hand, and delivers accurate measurement results.
- * Equipped with large-capacity storage, it can hold over 5,000 sets of experimental data, allowing users to review them freely.
- * A unique high-precision optical filter system ensures greater instrument stability and higher measurement accuracy.
- * The built-in high-capacity lithium battery and advanced charging system provide up to 10 hours of battery life.
- * Utilizes a cold light source with narrow-band interference technology, offering a long service life of up to 20,000 hours.
- * Incorporates the new ultra-compact T5L chip, making the instrument more responsive and providing a large capacity of up to 500M memory.
- * Supports a 9-point calibration curve. Users can create custom curves based on measurement requirements to meet diverse needs.
- * Used with pre-made Lab-yy reagents, it eliminates reagent preparation steps, saving time, reducing the required technical skill, and significantly improving work efficiency.

Introduction:

Portable water hardness meter is used for the rapid and accurate quantitative analysis of calcium and magnesium ion concentrations in water samples. Its core function is to monitor water hardness, which is a critical parameter for assessing water quality. This instrument is widely applied in various fields, including environmental monitoring, wastewater treatment, industrial boiler water control, aquaculture, swimming pool maintenance, and drinking water analysis.

Accessories:

- Meter
- Reagent(50 tests)
- Light shield cap
- Colorimetric tube*4

Technical Parameters:

Model	PH-1000YD
Testing Method	Acidic cadmium lanthanum K photometric method
Range	0~5mg/L
Indication Error	≤8%
Repeatability	≤±3%
Optical Stability	≤0.001 A/10 min
Measurement Time	5 minutes
User-defined Calibration	Supported
Data Storage	Over 5,000 records
Colorimetric Method	Colorimetric tube
Operating Temperature	5~40°C
Operating Humidity	≤85%RH(Non-condensing)
Rated Voltage	DC 5V
Rated Power	10W
Power Requirements	Lithium battery
External Size(W*D*H)	220*100*75mm
Package Size(W*D*H)	350*280*150mm
Net Weight	0.5kg
Gross Weight	2kg

Portable Water Hardness Meter



Features:

- * 2 to 5 points calibration from low to high concentrations.
- * Selectable water hardness units - mmol/L, mg/L, German degree (°dH), English degree (°e) and French degree (°f).
- * Automatic temperature compensation ensures accurate readings over the entire range
- * Auto-Read function senses and locks the measurement endpoint.
- * Calibration due alarm prompts user to calibrate the meter regularly.
- * Auto-Power Off effectively conserves battery life.
- * Setup menu allows setting the number of calibration points, stability criteria, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Expanded memory stores or recalls up to 500 data sets.
- * USB communication interface for data transfer or connecting a power adapter to meter.



Accessories:

Water hardness electrode, temperature probe, standard solutions (10/100mmol/L), ionic strength adjuster and carrying.

Technical Parameters:

Model		PH-322
Water Hardness	Range	0.05~200mmol/L, 0~1122°dH, 0~2000°fH, 0~1404°e, 0~8020mg/L (Ca2+), 0~19999mg/L (CaCO3), 0~11220mg/L (CaO)
	Resolution	0.001, 0.01, 0.1, 1
	Accuracy	±1% F.S.
	Calibration Points	2 to 5 points (0.01, 0.1, 1, 10, 100mmol/L)
Temperature	Range	0.0~105.0°C
	Resolution	0.1°C
	Accuracy	±0.5°C
	Offset Calibration	1 point, reading ±10°C
Other Specifications	Temperature Compensation	0~50°C, manual or automatic
	Hold Function	Manual or auto-endpoint
	Auto-Off	10, 20 or 30 minutes after last key pressed
	Memory	500 data sets
	Communication Interface	USB
	Connector	BNC, 3.5 mm jack socket
	Display	Custom LCD (80*60 mm)
	Power Requirements	3*1.5V AA batteries or DC5V power adapter
	Dimension	170*85*30mm
	Net Weight	300g
	Packing Size	475*155*350mm
	Gross Weight	2kg

Benchtop Water Hardness Meter



Introduction:

The benchtop water hardness meter utilizes high-precision electrodes combined with intelligent algorithms to rapidly complete detection within a short time, accurately outputting reliable data measured in mg/L. This instrument is widely used in drinking water plants, wastewater treatment, industrial circulating water systems, boiler feedwater applications, aquaculture, and laboratory testing. It serves as a core tool for ensuring water safety, preventing equipment scaling, and optimizing water treatment processes.

Features:

- * Equipped with a 7-inch color touch screen and an intuitive GUI graphic navigation system, it aligns with user operation habits for easy adoption.
- * Features large-capacity storage, including 5 built-in curves and 195 expandable curves, capable of storing over 5000 experimental data entries for user-friendly access and review.
- * Unique high-precision optical filter system ensures enhanced instrument stability and higher measurement accuracy.
- * Built-in thermal printer allows printing of current and stored data, saving laboratory space.
- * Utilizes a cold light source with narrow-band interference technology, providing a long service life of up to 100,000 hours.
- * Powered by the new ARM9 chip, the instrument responds more sensitively and offers a larger capacity of up to 500MB memory.
- * Supports USB storage for convenient data transfer and backup.
- * Allows users to create custom curves based on measurement needs, with adjustable segment coefficient K for flexible adaptation.
- * Compatible with Lab-yy prefabricated reagents, significantly reducing experimental steps, simplifying measurements, and improving data accuracy.
- * Detection items comply with national industry standards.

Accessories:

- * Meter
- * Reagent(50 tests)
- * Glass cuvette*4
- * Colorimetric tube*10

Technical Parameters:

Model	PH-T1000YD
Testing Method	Acidic cadmium lanthanum K photometric method
Range	0.05~50mg/L
Indication Error	≤8%
Repeatability	≤±5%
Optical Stability	≤0.001 A/10 min
Measurement Time	5 minutes
Light Source Life	100,000 hours
Curve Capacity	Can be set to 200 items
Data Storage	Over 5,000 records
Colorimetric Method	Colorimetric tube/cuvette
Operating Temperature	5~40°C
Operating Humidity	≤85%RH(Non-condensing)
Printer	Built-in thermal printer
Data Communication	USB interface
Rated Power	70W
Power Supply	AC 220V, 50/60Hz
External Size(W*D*H)	450*370*190mm
Package Size(W*D*H)	520*450*300mm
Net Weight	6kg
Gross Weight	8kg

Benchtop Water Hardness Meter



Features:

- * 2 to 5 points calibration from low to high concentrations.
- * Selectable water hardness units - mmol/L, mg/L, German degree (°dH), English degree (°e) and French degree (°f).
- * Automatic temperature compensation ensures accurate readings over the entire range.
- * Auto-Read function senses and locks the measurement endpoint.
- * Calibration due alarm prompts user to calibrate the meter regularly.
- * Setup menu allows setting the number of calibration points, stability criteria, etc.
- * Reset function automatically resumes all settings back to the factory defaults.
- * Expanded memory stores or recalls up to 500 data sets.
- * USB communication interface is easy to transfer data to PC.

Accessories:

Water hardness electrode, temperature probe, standard solutions (10/100mmol/L), ionic strength adjuster, electrode holder, USB cable and power adapter.

Technical Parameters:

Model		PH-932
Water Hardness	Range	0.05~200mmol/L, 0~1122°dH, 0~2000°FH, 0~1404°e, 0~8020mg/L (Ca2+), 0~19999mg/L (CaCO3), 0~11220mg/L (CaO)
	Resolution	0.001, 0.01, 0.1, 1
	Accuracy	±1% F.S.
	Calibration Points	2 to 5 points (0.01, 0.1, 1, 10, 100mmol/L)
Temperature	Range	0.0~105.0°C
	Resolution	0.1°C
	Accuracy	±0.5°C
	Offset Calibration	1 point, reading ±10°C
Other Specifications	Temperature Compensation	0~50°C, manual or automatic
	Stability Criteria	Low or high
	Calibration Due Alarm	1 to 31 days or off
	Memory	500 data sets
	Communication Interface	USB
	Connector	BNC, 3.5 mm jack socket
	Display	Custom LCD (125*100mm)
	Power Requirements	DC5V power adapter
	Dimension	210*188*60mm
	Net Weight	1.5kg
	Packing Size	310*240*180mm
	Gross Weight	1.7kg

Portable Multiparameter Water Quality Meter



- Features:**
- * LCD display screen, 3.5 inches.
 - * Multi-reading feature allows auto-read, timed-read and continuous-read.
 - * Automatic/Manual temperature compensation ensures accurate results.
 - * Auto-hold feature senses and locks the measurement endpoint.
 - * Data capacity of up to 500 sets for each parameter(GLP-compliant).
 - * Support for USB communication.
 - * Auto-power off feature effectively extends the battery service life.
 - * Reset feature automatically resumes all settings back to factory default options.
 - * IP65 waterproof. The portable meter is suitable for fields measurements and outdoor measurements.

Accessories:

Meter; pH composite electrode; conductivity electrode; polarographic DO electrode; standard pH buffer solution(50mL) (pH 4.01, 7.00, 10.01); conductivity standards 1413μS/cm(50mL); power adapter DC 5V 2A; electrode holder; microUSB cable; microUSB to DB25 printing cable; silicone rubber case(Installed on the host); wristband assembly(Small); carrying case

Technical Parameters:

Model		M310F
pH	Range	-2.00~20.00pH
	Resolution	0.1, 0.01pH
	Accuracy	±0.01pH
	Calibration Points	1~5 points
	Standard Customization	Yes
	Standard Recognition	NIST, GB and DIN buffers
	Slope Limit	Yes
mV	Range	-2000.0~2000.0mV
	Resolution	0.1mV
	Accuracy	±0.3mV or ±0.1%
pX	Range	-2.00~20.00
	Resolution	0.1, 0.01pX
	Accuracy	±0.01pX
	Calibration Points	1~5 points
ISE	Range	1E-9~9.999E9
	Resolution	Up to 4 significant digits
	Accuracy	±0.5%
	Units	mol/L, mmol/L, g/L, mg/L, μg/L
	Calibration Points	1~5 points

Conductivity	Range	0.000μS/cm~500mS/cm
	Resolution	0.001μS/cm minimum, various with range selection
	Accuracy	±1.0%FS
	Reference Temperature	20, 25℃
	Calibration Points	1~3 points
	Standard Recognition	84μS/cm, 1413μS/cm, 12.88mS/cm
Resistivity	Range	5.00~20.00MΩ·cm
	Resolution	0.01Ω·cm minimum
	Accuracy	±1.0%FS
TDS	Range	0.00mg/L~300g/L
	Resolution	0.01mg/L minimum, various with range selection
	Accuracy	±1.0%
Salinity	Range	(0.00~8.00)%
	Resolution	0.01%
	Accuracy	±0.2%
DO Concentration	Range	0.00~50.00mg/L
	Resolution	0.01mg/L
	Accuracy	±0.1mg/L
	Calibration Points	Air-saturated water or zero point
	Barometric Compensation	Yes
Saturation	Manual Salinity Factor Correction	Yes
	Range	(0.0~300.0)%
	Resolution	0.1%
	Accuracy	±10.0%
Temperature	Range	-5~110℃, 23~230°F
	Resolution	0.1
	Unit	℃, °F
	Relative Accuracy	±0.2
Measurement	Reading Mode	Auto read (Fast, medium, slow), timed, continuous
	Reading Prompts	Reading, stable, locked
	Temp. Compensation	ATC, MTC
Data Management	Data Storage	500 results each
	GLP Features	Yes
Inputs	pH Electrode	BNC(Q9)
	DO with Temp. Probe	4-pin aviation connector
	Conductivity with Temp. Probe	5-pin aviation connector
Outputs	USB	PC, printer
Display Options	Backlight	Yes
	Auto Shutdown	300, 600, 1200, 1800, 3600 sec., off
	IP Rating	IP65
	Date and Time	Yes
Power Requirements		Rechargeable lithium battery, AC adapter, 100~240V AC input, DC5V output
External Size(W*D*H)		80*35*255mm
Package Size(W*D*H)		490*410*220mm
Net Weight		0.5kg
Gross Weight		5.5kg

Portable Multiparameter Water Quality Meter



Features:

- PH:**
- * Multiparameter water quality meter is equipped with a 3.5 inches backlit LCD display.
 - * 1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers.
 - * Automatic electrode diagnosis shows the pH slope and offset.
- ORP:**
- * 1 point offset calibration allows adjusting the displayed value to a known standard.
 - * Relative and absolute millivolt modes ensure the reliable ORP measurements.
- Ion Concentration:**
- * 2 to 5 points calibration, including the 8 concentration points can be selected.
 - * Direct ion concentration readout simplifies the measurement process.
 - * Automatic electrode diagnosis shows the calibration points and slopes.
 - * Selectable concentration units (ppm, mg/L, mol/L, mmol/L) and ionic valency.
- Conductivity/TDS/Salinity/Resistivity:**
- * 1 to 5 points calibration with automatic recognition for conductivity standards.
 - * Selectable cell constant, reference temperature, TDS factor, linear and pure water compensations, seawater and practical salinity measurement modes.
 - * Automatic electrode diagnosis shows the calibration points and factors.
- Dissolved Oxygen:**
- * 1 or 2 points calibration using the air-saturated water or zero oxygen solution.
 - * Salinity and barometric pressure compensations eliminate the measurement error.
- Other Features:**
- * Automatic temperature compensation ensures accurate readings over the entire range.
 - * Auto-Read function senses and locks the measurement endpoint.
 - * Calibration due alarm prompts user to calibrate the meter regularly.
 - * Auto-Power Off effectively conserves battery life.
 - * Setup menu allows setting the number of calibration points, resolution, stability criteria, temperature unit, date and time, etc..
 - * Reset function automatically resumes all settings back to the factory defaults.
 - * Expanded memory stores or recalls up to 500 data sets.
 - * USB communication interface is easy to transfer data to PC.
 - * Multi-mode power scheme (batteries, power adapter and USB port) ensures that using the meter smoothly.



Accessories:

pH/conductivity/dissolved oxygen electrode, temperature probe, pH standard buffer, conductivity standard solutions, dissolved oxygen electrolyte, membrane cap, carrying case.

Technical Parameters:

Model		PH-900P
pH	Range	-2.000~20.000pH
	Resolution	0.001, 0.01, 0.1pH, selectable
	Accuracy	±0.002pH
	Calibration Points	1 to 5 points
	pH Buffer Options	USA, NIST, DIN, 2 custom buffers
ORP(optional)	Range	±1999.9mV
	Resolution	0.1, 1mV, selectable
	Accuracy	±0.2mV
Ion(optional)	Calibration Points	1 point
	Range	0.001~19999 (depending on the range of ISE)
	Resolution	0.001, 0.01, 0.1, 1
	Accuracy	±0.5% F.S. (monovalent), ±1% F.S. (divalent)
	Measurement Units	ppm, mg/L, mol/L, mmol/L
Conductivity	Calibration Points	2 to 5 points (0.001, 0.01, 0.1, 1, 10, 100, 1000, 10000)
	Range	0.1~2μS/cm(CON-0.1,optional); 2~20mS/cm(CON-1,standard); 20~200mS/cm(CON-10,optional)
	Resolution	0.001, 0.01, 0.1, 1
	Accuracy	±0.5% F.S.
	Calibration Solutions	10μS/cm, 84μS/cm, 1413μS/cm, 12.88mS/cm, 111.8mS/cm
	Temperature Coefficient	Linear (0.0~10.0%/°C), pure water
	Reference Temperature	20/25°C
	Cell Constant	K=0.1, 1, 10 or custom
TDS	Range	0~10.00, 100.0, 1000ppm, 10.00, 200.0ppt
	Resolution	0.01, 0.1, 1
	Accuracy	±1% F.S.
	TDS Factor	0.1~1.0 (default 0.5)
Salinity	Range	0.00~42.00psu, 0.00~80.00ppt
	Resolution	0.01
	Accuracy	±1% F.S.
Resistivity	Range	0.00~20.00MΩ
	Resolution	0.01
	Accuracy	±1% F.S.
DO	Range	0.00~20.00mg/L, 0.0~200.0% saturation
	Resolution	0.01mg/L, 0.1%
	Accuracy	±0.2mg/L, ±2.0%
	Calibration Points	1 or 2 points
	Barometric Pressure Correction	60.0~112.5kPa/450~850mmHg, manual
	Salinity Correction	0.0~50.0g/L, manual
Other Specifications	Temperature Compensation	0~100°C/32~212°F, manual or automatic
	Memory	500 data sets, USB communication interface
	Power Requirements	3*1.5V AA batteries or DC5V power adapter
	Dimension	170*85*30mm
	Net Weight	300g
	Packing Size	450*320*100mm
	Gross Weight	2kg

Benchtop Multiparameter Water Quality Meter



Features:

- * High resolution LCD display, 5.7 inches.
- * Multi-reading feature allows auto-read, timed-read and continuous-read.
- * Automatic/manual temperature compensation ensures accurate results.
- * Auto-hold feature senses and locks the measurement endpoint.
- * Data storage 500 sets(GLP-compliant).
- * Support for USB or RS-232 communication.
- * Reset feature automatically resumes all settings back to factory default options.
- * IP54 dustproof and spillproof.
- * Ion: over 10 methods are built-in, including F⁻, Cl⁻, Br⁻, I⁻, NO₃⁻, BF₄⁻, NH₄⁺, K⁺, Na⁺, Ca₂⁺, Cu₂⁺, Pb₂⁺, Ag⁺ and etc., user-defined method is supported.
- * Selectable pH buffer groups, including NIST, DIN, GB, USA.
- * DO: selectable pressure unit, including kPa, mbar, Torr, Atm.

Accessories:

Meter; composite electrode; conductivity electrode; polarographic DO electrode; standard pH buffer solution(50mL)(pH4.01, 7.00, 10.01); conductivity standard 1413μS/cm(50mL); electrode stand; power adapter DC 9V; universal USB cable; dust cover.

Technical Parameters:

Model		M300F
pH	Range	-2.00~20.00pH
	Resolution	0.1, 0.01pH
	Accuracy	±0.01pH
	Calibration Points	1~5 points
	Standard Customization	Yes
	Standard Recognition	NIST, GB, USA and DIN buffers
	Slope Limit	Yes
ORP	Range	-2000.0~2000.0mV
	Resolution	0.1mV
	Accuracy	±0.3mV or ±0.1%
pX	Range	-2.00~20.00pX
	Resolution	0.1, 0.01pX
	Accuracy	±0.01pX
	Calibration Points	1~5 points
ISE(Optional)	Range	1.000e-9~9.999e+9
	Resolution	Up to 4 significant digits
	Accuracy	±0.5%
	Calibration Points	1~5 points
	Unit	mol/L, mmol/L, g/L, mg/L, μg/L, ppm, ppb
Conductivity	Range	0.000μS/cm~1000mS/cm
	Resolution	0.001μS/cm minimum, various with range selection
	Accuracy	±1.0%FS
	Calibration Points	1~3 points
	Standard Recognition	84μS/cm, 1413μS/cm, 12.88mS/cm
	Reference Temperature	20, 25°C
Resistivity	Range	5.00~20.00MΩ·cm
	Resolution	0.01Ω·cm minimum
	Accuracy	±1.0%FS
TDS	Range	0.00ppm~300ppt
	Resolution	0.01mg/L minimum, various with range selection
	Accuracy	±1.0%FS
Salinity	Range	0.0~80.0ppt
	Resolution	0.1ppt
	Accuracy	±2ppt
DO Concentration- Polarographic	Range	0.00~20.00ppm
	Resolution	0.01ppm
	Accuracy	±0.10ppm
	Calibration Points	Air-saturated water or zero point
	Barometric Compensation	Yes
% Saturation -Polarographic	Manual Salinity Factor Correction	Yes
	Range	0.0~200.0%
	Resolution	0.1%
	Accuracy	±2.0%
Temperature	Range	-5~110°C/23~230°F
	Resolution	0.1
	Accuracy	±0.2
Measurement	Reading Mode	Auto read(Fast, medium, slow), timed, continuous
	Reading Prompts	Reading, stable, locked
	Temp. Compensation	ATC, MTC
Data Management	Data Storage	500 results each
	GLP Features	Yes
Outputs	USB	PC
	RS232	Printer
Power Supply		AC adapter, 100~240V, 50/60Hz AC input, DC9V output
External Size(W*D*H)		242*195*68mm
Package Size(W*D*H)		370*305*330mm
Net Weight		0.9kg
Gross Weight		3.5kg

Benchtop Multiparameter Water Quality Meter



Features:

- * High-resolution LCD display screen.
- * With built-in microprocessor chip, automatic calibration, automatic temperature compensation, data storage, parameter setup, etc.
- * Automatic calibration, self-diagnosis, automatically recognizing standard buffer solutions, stable reading display.
- * Cal points: pH: 1-3pts; conductivity: 1pt. DO: 100% Oxyegn or Zero oxygen calibration.
- * Each kit comes with an ATC pH probe, a plastic ATC Cond electrode, polarographic type DO probe and 3pcs replaceable sensor caps.
- * IP54 dustproof and spillproof.

Accessories:

Meter; ATC pH probe; pH buffer solution: pH4.00/7.00/10.01, 50mL, one for each; glass ATC Cond probe(K=1); standard Cond solution: 50mL: 84μS/1413μS/12.88mS/cm, one for each; polarographic DO probe, cable length: 2m; membrane refill solution: 30mL; sensor caps: 3pcs/group, 1pkg; flexible probe holder; power adaptor

Technical Parameters:

Model		PH-PCD100
pH	Range	-2.00~20.00pH
	Resolution	0.1/0.01pH
	Accuracy	±0.01pH ± one digit
Conductivity	Range	0~200.0mS/cm, auto divided by range of: 0~19.99μS/cm; 20.0~199.9μS/cm; 200~1999μS/cm; 2.00~19.99mS/cm; 20.00~199.9mS/cm
	Resolution	0.001
	Accuracy	±1.0 %FS ± one digit
TDS	Range	0~100.0g/L
	Resolution	0.001
	Accuracy	±1.0 %FS ± one digit
Resistivity	Range	5.00~100.0MΩ·cm
	Resolution	0.001
	Accuracy	±1.0 %FS ± one digit
Salinity	Range	0~100.0ppt
	Resolution	0.001
	Accuracy	±1.0 %FS ± one digit
DO	Range	0~20.00mg/L, 0~200.0 %
	Resolution	0.01mg/L
	Accuracy	±0.30mg/L
	ATC range	0~50℃, automatically
	Salinity Compensation	0~45ppt, manual
	Barometric Compensation	0~200.0kPa, automatically
Temperature	Range	-9.9~130.0℃/14.1~266.0°F
	Resolution	0.1℃
	Accuracy	±0.2℃
Data Storage		450 groups
Data Transfer		USB stick Bluetooth connection to printer(Optional)
Power Requirements		DC12V
External Size(W*D*H)		200*170*64mm
Package Size(W*D*H)		600*430*130mm
Net Weight		550g
Gross Weight		3kg

Benchtop Multiparameter Water Quality Meter



Features:

- pH:**
- * Multiparameter water quality meter is equipped with a 6.5 inches backlit LCD display 1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers.
 - * Automatic electrode diagnosis shows the pH slope and offset.
- ORP:**
- * 1 point offset calibration allows adjusting the displayed value to a known standard.
 - * Relative and absolute millivolt modes ensure the reliable ORP measurements.
- Ion Concentration:**
- * 2 to 5 points calibration, including the 8 concentration points can be selected.
 - * Direct ion concentration readout simplifies the measurement process.
 - * Automatic electrode diagnosis shows the calibration points and slopes.
 - * Selectable concentration units (ppm, mg/L, mol/L, mmol/L) and ionic valency.
- Conductivity/TDS/Salinity/Resistivity:**
- * 1 to 5 points calibration with automatic recognition for conductivity standards.
 - * Selectable cell constant, reference temperature, TDS factor, linear and pure water compensations, seawater and practical salinity measurement modes.
 - * Automatic electrode diagnosis shows the calibration points and factors.
- Dissolved Oxygen:**
- * 1 or 2 points calibration using the air-saturated water or zero oxygen solution
 - * Salinity and barometric pressure compensations eliminate the measurement error
- Other Features:**
- * Automatic temperature compensation ensures accurate readings over the entire range.
 - * Auto-Read function senses and locks the measurement endpoint.
 - * Calibration due alarm prompts user to calibrate the meter regularly.
 - * Setup menu allows setting the number of calibration points, resolution, stability criteria, temperature unit, date and time, etc.
 - * Reset function automatically resumes all settings back to the factory defaults.
 - * Expanded memory stores or recalls up to 500 data sets.
 - * USB communication interface for data transfer and timed interval readings.

Accessories:

pH/conductivity/dissolved oxygen electrodes, temperature probe, pH buffer sachets, conductivity standard solutions, DO electrolyte solution, membrane cap, electrode holder, USB cable and power adapter

Technical Parameters:

Model	PH-900	
pH	Range	-2.000~20.000pH
	Resolution	0.001, 0.01, 0.1pH, selectable
	Accuracy	±0.002pH
	Calibration Points	1 to 5 points
	pH Buffer Options	USA, NIST, DIN, 2 custom buffers
ORP(optional)	Range	±1999.9mV
	Resolution	0.1, 1mV, selectable
	Accuracy	±0.2mV
	Calibration Points	1 point
Ion(optional)	Range	0.001~19999 (depending on the range of ISE)
	Resolution	0.001, 0.01, 0.1, 1
	Accuracy	±0.5% F.S. (monovalent), ±1% F.S. (divalent)
	Measurement Units	ppm, mg/L, mol/L, mmol/L
	Calibration Points	2 to 5 points (0.001, 0.01, 0.1, 1, 10, 100, 1000, 10000)
Conductivity	Range	0.1~2μS/cm(CON-0.1,optional); 2~20mS/cm(CON-1,standard); 20~200mS/cm(CON-10,optional)
	Resolution	0.001, 0.01, 0.1, 1
	Accuracy	±0.5% F.S.
	Calibration Points	1 to 5 points
	Calibration Solutions	10μS/cm, 84μS/cm, 1413μS/cm, 12.88mS/cm, 111.8mS/cm
	Temperature Coefficient	Linear (0.0~10.0%/°C), pure water
	Reference Temperature	20/25°C
	Cell Constant	K=0.1, 1, 10 or custom
TDS	Range	0~10.00, 100.0, 1000ppm, 10.00, 200.0ppt
	Resolution	0.01, 0.1, 1
	Accuracy	±1% F.S.
	TDS Factor	0.1~1.0 (default 0.5)
Salinity	Range	0.00~42.00psu, 0.00~80.00ppt
	Resolution	0.01
	Accuracy	±1% F.S.
Resistivity	Range	0.00~20.00MΩ
	Resolution	0.01
	Accuracy	±1% F.S.
DO	Range	0.00~20.00mg/L, 0.0~200.0% saturation
	Resolution	0.01mg/L, 0.1%
	Accuracy	±0.2mg/L, ±2.0%
	Calibration Points	1 or 2 points
	Barometric Pressure Correction	60.0~112.5kPa/450~850mmHg, manual
	Salinity Correction	0.0~50.0g/L, manual
Other	Temperature Compensation	0~100°C/32~212°F, manual or automatic
	Memory	500 data sets, USB communication interface
	Power Requirements	DC5V power adapter
	Dimension	210*188*60mm
	Net Weight	1.5kg
Specifications	Packing Size	300*250*200mm
	Gross Weight	1.7kg

Spectrophotometer

Micro-Volume UV/VIS Spectrophotometer



Features:

- * Small amount
 As low as 0.5μl sample volume
- * Fast
 One step, one action
- * Accurate
 No light loss during measurement
- * Easy to clean
 No special materials required for wiping
- * Multi-function
 Expandable functions

Technical Parameters:

Model	BK-CW500P
Pathlength	0.5mm
Sample Volume	0.5~2μL
Light Source	Long-life pulsed xenon lamp
Wavelength Range	190~1000nm
Wavelength Precision	±1nm
Wavelength Resolution	0.5nm
Absorbance Precision	0.001Abs
Absorbance Accuracy	0.3%
Absorbance Range	0.001~300Abs (Equivalent to 10nm)
Nucleic Acid Measurement Range	10~5000ng/μL dsDNA
Protein Measurement Range	0.05~300mg/ml, BSA
Display Mode	8-inch color capacitive touch screen
Data Output	USB-A*2; USB-B*1
Power Supply	AC220V, 50/60Hz; 110V, 50/60Hz(Optional, external transformer)
External Size(W*D*H)	210*285*210mm
Package Size(W*D*H)	300*400*300mm
Net Weight	5kg
Gross Weight	5.2kg

Application:

Micro-Volume Spectrophotometer is used for quantitative and qualitative research by spectrophotometry.It is usually used in quantitative research of nucleic acid, proteins and bacterial concentration.

Features:

- * Most samples don't need dilute.
- * Microscale sample test, minimum 0.5μl.
- * PC control, more accurate and flexible.
- * Ultramicro and cuvette dual platform (Only for BK-CW2000).
- * Wide test area, 100 times of the traditional spectrophotometer.
- * Test directly without warming up, do not need detection container, lower daily consumption.

Technical Parameters:

Model	BK-CW1000	BK-CW2000
Minimum Sample Capacity	0.5μl	
Ultramicro Optical Distance	1mm/0.2mm	1mm/0.2mm/0.05mm
Cuvette Optical Distance	/	10mm/5mm/2mm/1mm
Whole Wavelength	190~1100nm	
Scanning Wavelength	190~850nm	
Wavelength Accuracy	1nm	
Wavelength Resolution	≤0.3nm (FWHM @ Hg 253.7nm)	
Absorbance Accuracy	2% (0.76 @ 257nm)	
Absorbance Resolution	0.002Abs (1mm)	
Absorbance Range	0.02~300 (10mm)	0.005~300 (10mm)
Test Accuracy	0.1~5 Abs.±0.1 Abs 5~80 Abs. ±2%	0.01~0.5 Abs. ±0.01Abs 0.5~80 Abs. ±2%
Test Time	5s	
Detector	3648 pixel linear CCD array	
Light Source	Xenon flash lamp	
Sample Test Platform Material	304 stainless steel and quartz	
Standard Accessories	• Driver software CD 1 pc • Power line 1 pc • Power Adapter 1 pc	
Consumption	24W	
Power Supply	AC 100~240V, 50/60Hz	
External Size(W*D*H)	200*130*136mm	
Package Size(W*D*H)	310*310*310mm	
Net Weight	2kg	2.5kg
Gross Weight	5kg	



UV-Vis Spectrophotometer



Introduction:

The UV-Vis Spectrophotometer is an analytical instrument based on the principle of ultraviolet visible spectrophotometry, which uses the radiation absorption of molecules in the ultraviolet visible spectral region for analysis. It is widely used in various fields such as medicine and health, environmental monitoring, life sciences, drug analysis, food analysis, organic chemistry, biochemistry, etc.

Accessories:



Glass Cuvette for visible area determination
 Quartz Cuvette for ultraviolet light area determination



Deuterium Lamp:
 Ultraviolet light source



Tungsten Lamp:
 Visible light source

Features:

- * 10.1-inch full color touch screen display, which can directly display various scanning curves and graphs without the need for a computer.
- * The standard USB drive and Bluetooth can realize wired and wireless storage, and one-click screenshots can export data pictures in real time.
- * It adopts advanced A6 core high-performance processor, and optional mouse and keyboard.
- * Nucleic acid and protein concentration determination function, rapid detection of nucleic acid extraction purity.
- * Qualitative and quantitative analysis capabilities to test unknown substances and known sample concentrations.

Technical Parameters:

Model	UV-1100
Display	10.1-inch LCD touch screen
Optical System	Single beam
Light Source	International famous deuterium lamp, tungsten lamp
Wavelength	190nm-1100nm
Stray Light	0.05% (220nm)
Spectral Bandwidth	2nm
Wavelength Accuracy	Full wavelength 0.3nm(656.1nm 0.1nm)
Wavelength Repeatability	0.1nm
Transmittance Accuracy	0.3%T
Photometric Mode	Transmittance, absorbance, concentration, energy
Interface	RS-232, USB
Standard Accessory	10mm glass cuvette*4, 10mm quartz cuvette*2
Optional Accessory	Printer
Consumption	160W
Power Supply	AC220V, 50/60Hz(Standard); 110V, 50/60Hz(Optional)
External Size(W*D*H)	562*520*260mm
Package Size(W*D*H)	650*620*380mm
Net Weight	21kg
Gross Weight	28kg

UV/VIS Spectrophotometer



Introduction:

It is based on the absorption spectrum of substances to study the composition of substances, structure and interaction between substances, with a wide wavelength range, high sensitivity, simple operation, simple structure, beautiful appearance and other advantages, can be widely used in chemical, pharmaceutical, biochemistry, metallurgy, light industry, textile, materials, environmental protection, medical laboratory and education and other industries. It is one of the important quality control instruments in the analytical test industry, and is a necessary instrument in conventional laboratories.



Features:

- * Adjustable scanning speed: high, medium, or low.
- * System upgrade capability, customers provide the instrument number for one-click USB upgrade (Lifetime free upgrades).
- * Large storage capacity, capable of storing 57,600 sets of data.
- * Test data can be exported via USB.
- * Optional printer for real-time printing of measurement results.

Technical Parameters:

Model	BK-V1000G	BK-V1600G	BK-UV1000G	BK-UV1600G	BK-UV1800G
Display	Matrix LCD	LCD touch screen	Matrix LCD	LCD touch screen	
Optical System	Single beam, grating 1200L/mm				
Wavelength	325~1020nm	325~1100nm	200~1020nm	190~1100nm	
Spectral Bandwidth	4.0nm				2.0nm
Wavelength Accuracy	±1.5nm				±0.5nm
Wavelength Repeatability	≤0.2nm				
Photometric Accuracy	±0.002A(0~0.5A), ±0.004A(0.5~1.0A), ±0.4%T (0~100%T)				±0.002A(0~0.5A), ±0.004A(0.5~1.0A), ±0.3%T (0~100%T)
Photometric Repeatability	0.001A(0~0.5A), 0.002A(0.5~1.0A), ≤0.2%T (0~100%T)				0.001A(0~0.5A), 0.002A(0.5~1.0A), ≤0.15%T (0~100%T)
Stray Light	≤0.1%T(360nm)		≤0.1%T(220nm, 360nm)		≤0.05%T (220nm, 360nm)
Stability	±0.001A/h(500nm)				
Photometric Range	-0.301~3.0A; 0~200%T; 0~9999C				
Photometric Mode	A, T, C, F	A, T, C, E			
Wavelength Setting	Automatic				
Output	RS232, USB	RS232, USB, WiFi, bluetooth printer (Optional)	RS232, USB	RS232, USB, WiFi, bluetooth printer(Optional)	
Detector	Imported silicon photodiode				
Light Source	Tungsten lamp		Deuterium lamp, tungsten lamp		
Standard Accessory	10mm glass cuvette*4	10mm glass cuvette*4, PC software	10mm glass cuvette*4, 10mm quartz cuvette*2	10mm glass cuvette*4, 10mm quartz cuvette*2, PC software	
Optional Accessory	Thermal printer	Bluetooth printer	Thermal printer	Bluetooth printer	
Power Supply	AC 100~220V, 50/60Hz				
External Size(W*D*H)	466*365*200mm				466*365*220mm
Package Size(W*D*H)	590*450*310mm				
Net Weight	10.1kg	11.1kg	10.55kg	11.55kg	12kg
Gross Weight	13.8kg	14.8kg	14.75kg	15.75kg	16.2kg

UV/VIS Spectrophotometer

Basic Functions:

Model	Optical System	Wavelength Range	Bandwidth	Photo-metry	QTY	MULT	KINS	Scanning	Bio
BK-V1000	Single Beam	325-1020nm	4nm	•					
BK-UV1000	Single Beam	200-1020nm	4nm	•					
BK-V1200	Single Beam	325-1020nm	4nm	•	•				
BK-UV1200	Single Beam	200-1020nm	4nm	•	•				
BK-V1600	Single Beam	320-1100nm	4nm	•	•	•	•		
BK-UV1600	Single Beam	190-1100nm	4nm	•	•	•	•		
BK-V1800	Single Beam	320-1100nm	2nm	•	•	•	•		
BK-UV1800	Single Beam	190-1100nm	2nm	•	•	•	•		
BK-V1900	Single Beam	320-1100nm	2nm	•	•	•	•	•	•
BK-UV1900	Single Beam	190-1100nm	2nm	•	•	•	•	•	•
BK-S360	Single Beam	190-1100nm	1.8nm	•	•	•	•	•	•
BK-S380	Single Beam	190-1100nm	1nm	•	•	•	•	•	•
BK-S390	Single Beam	190-1100nm	0.5, 1, 2, 4,5nm	•	•	•	•	•	•
BK-D560	Double Beam	190-1100nm	1.8nm	•	•	•	•	•	•
BK-D580	Double Beam	190-1100nm	1nm	•	•	•	•	•	•
BK-D590	Double Beam	190-1100nm	0.5, 1, 2,4, 5nm	•	•	•	•	•	•

Features:

- * Large LCD screen (128*64 Dots).
- * Pre-aligned design ensures the user can change lamps conveniently.
- * With SiO₂ coating optical mirror, reducing the pollution from outside fully.
- * Environmental Deuterium lamp, preventing from Ozone inhalation.
- * High-class grating, wholly hermetic light path design, ensures the super low stray light.
- * Real-time monitoring the lifetime of Deuterium lamp and Tungsten lamp with advanced system.
- * Wavelength calibration, wavelength setting, change lamp source and dark current calibration automatically.
- * Optional PC Software to expand the applications to Quantitative, Multi-Wavelength and Kinetics.
- * Widely used for Organic chemistry, Inorganic chemistry, Life sciences, food, Medicine and health, Agriculture, Geology, Metallurgy and Environment etc. fields.



BK-UV/V1000/1200

Basic Fuctions:

- * Photometry
Test Abs, Transmittance by fixed wavelength.
- * Quantitative
a. C Mode: EstablishC=K*A curve, test sample concentration.
b. F Mode: Establish A=K1*C+K0, test sample concentration.
c. Display and save curve, test data (BK-V1200).

WL: 546.0			
T: 100.0			
A	T	C	F

Photometry Mode

WL: 546.0			
C: 10C			
A	T	C	F

Con. Test C=K*A+B

Technical Parameters:

Model	BK-UV1000	BK-V1000	BK-UV1200	BK-V1200
Optical System	Single Beam, Grating 1200 lines/mm			
Wavelength Range	200~1100nm	325~1100nm	195~1100nm	320~1100nm
Spectral Bandwidth	4nm			
Wavelength Accuracy	±1.8nm		±1.0nm	
Wavelength Repeatability	≤0.5nm			
Photometric Accuracy	±0.002A(0~0.5Abs), ±0.004A(0.5~1.0Abs), ±0.5%T(0~100%T)			
Photometric Repeatability	0.001Abs(0~0.5Abs), 0.002Abs(0.5~1.0Abs), ≤0.2%T(0~100%T)			
Stray Light	≤0.2%T@360nm; 220nm(UV)			
Stability	± 0.002A/h@500nm			
Noise	±0.001A			
Display	128*64 Dots LCD			
Photometric Mode	T, A, C, E			
Photometric Range	0~200%T, -0.301~3.0A			
Detector	Silicon Photodiode			
Light Source	Deuterium Lamp, Tungsten Lamp			
Input	Membrane Keypad			
Output	Parallel Print,USB1.0			
Power Supply	AC 85~265V, 50/60Hz			
Standard Accessories	1cm glass cuvette*4, 1cm quartz cuvette*2, 1cmquadruple cuvette holder*1	1cm glass cuvette*4, 1cmquadruple cuvette holder*1	1cm glass cuvette*4, 1cm quartz cuvette*2, 1cmquadruple cuvette holder*1	1cm glass cuvette*4, 1cmquadruple cuvette holder*1
Optional Accessories	General application software, 1cm standard single slot cuvette holder, long optical path cuvette holder, cuvette, micro cuvette, test tube type absorber rack, solid sample holder, deuterium lamp(only for UV series), tungsten lamp, quadruple cuvette holder, printer, four-slot water bath type constant temperature absorption pool, X-Y Adjustable Micro Absorption Pool, single bath type constant temperature absorption pool			
Package Size(W*D*H)	560*430*320mm			
Gross Weight	12kg	11.5kg	12kg	11.5kg

UV/VIS Spectrophotometer

Features:

- * With SiO₂ coating optical mirror, reducing the pollution from outside fully.
- * Wavelength calibration, wavelength setting, change lamp source and dark current calibration automatically.
- * With GLP self-check function, check the wavelength accuracy and Photometry accuracy.
- * PC Software to expand the applications to Quantitative, Multi-Wavelength and Kinetics, Spectrum Scanning, DNA/Protein test for PC Series.

Basic Functions:

- * **Photometry**
Test Abs., Transmittance and Energy by fixed wavelength.
- * **Kinetics**
Used for time course scanning or reaction rate calculations $\Delta A/t$, can search all data.
- * **Multi-Wavelength**
Can test Transmittance and Abs. with 8 different wavelengths at most
- * **Quantitative**
Linear fit and Linear fit through zero two modes.
a. Coefficient, Standard Sample input and Standard Sample read three modes to establish standard curve.
b. Establish $A=K1 \cdot C+K0$, can search original data, graph curve, parameters settings.
c. Can save 240 group curves, can test 240 data in each curve.
d. Double wavelength, Triple wavelength test functions.

Technical Parameters:

Model	BK-UV1800 BK-UV1800PC	BK-UV1600 BK-UV1600PC	BK-V1800 BK-V1800PC	BK-V1600 BK-V1600PC
Optical System	Single Beam, Grating 1200 lines/mm			
Wavelength Range	190~1100nm		320~1100nm	
Spectral Bandwidth	2nm	4nm	2nm	4nm
Wavelength Accuracy	±0.5nm			
Wavelength Repeatability	≤0.2nm			
Photometric Accuracy	±0.002A(0~0.5Abs), ±0.004A(0.5~1.0Abs), ±0.5%T(0~100%T)			
Photometric Repeatability	0.001Abs(0~0.5Abs), 0.002Abs(0.5~1.0Abs), ≤0.2%T(0~100%T)			
Stray Light	≤0.04%T@360nm; 220nm		≤0.04%T@360nm	
Stability	±0.001A/h@500nm			
Baseline Flatness	±0.002A			
Noise	±0.0005A			
Display	480*272 65 thousand true color TFT LCD			
Photometric Mode	T, A, C, E			
Photometric Range	0~200% T, -0.301~3.0A			
Detector	Silicon Photodiode			
Light Source	Deuterium Lamp, Tungsten Lamp			
Input	Membrane Keypad			
Output	USB-A*2 Print and data output USB-B Connect PC			
Standard Accessories	1cm glass cuvette*4, 1cm quartz cuvette*2, 1cmquadruple cuvette holder*1, Scanning software(only for PC type)		1cm glass cuvette*4, 1cm quadruple cuvette holder*1, Scanning software(only for PC type)	
Optional Accessories	1cm standard single slot cuvette holder, long optical path cuvette holder, cuvette, micro cuvette, test tube type absorber rack, solid sample holder, deuterium lamp(only for UV series), tungsten lamp, quadruple cuvette holder, printer, four-slot water bath type constant temperature absorption pool, X-Y Adjustable Micro Absorption Pool, single bath type constant temperature absorption pool, program-controlled thermostatic absorption pool seat, 8 racks, reflection accessories, general application software or Scanning software(not for PC type)			
Power Supply	AC 85~265V, 50/60Hz			
Package Size(W*D*H)	620*500*370mm			
Gross Weight	18kg		16.5kg	



Scanning UV/VIS Spectrophotometer

Features:

- * With SiO₂ coating optical mirror, reducing the pollution from outside fully.
- * Adopted high-class grating with wholly hermetic light path design, to ensure the instrument has the super low stray light.
- * With GLP self-check function, check the wavelength accuracy and Photometry accuracy.
- * Real-time monitoring the lifetime of Deuterium lamp and Tungsten lamp with advanced system.
- * Wavelength calibration, wavelength setting, change lamp source and dark current calibration automatically.

Basic Functions:

- * **Photometry**
Test Abs., Transmittance and Energy by fixed wavelength.
- * **Quantitative**
Linear fit and Linear fit through zero two modes.
a. Coefficient, Standard Sample input and Standard Sample read three modes to establish standard curve.
b. Establish $A=K1 \cdot C+K0$, can search original data, graph curve, parameters settings.
c. Can save 240 group curves, can test 240 data in each curve.
d. Double wavelength, Triple wavelength test functions.
- * **Kinetics**
Used for time course scanning or reaction rate calculations $\Delta A/t$, can search all data.
- * **Multi-Wavelength**
Can test Transmittance and Abs. with 8 different wavelengths at most.
- * **Scanning**
User can set the scan range from 190nm to 1100nm to test the max. Abs. peak value, can do derivation, arithmetical operations to the graph.
- * **Biology**
6 methods: DNA/Protein, UV, Lowry, BCA, CBB and Biuret.

Technical Parameters:

Model	BK-UV1900 BK-UV1900PC	BK-V1900 BK-V1900PC
Optical System	Single Beam, Grating 1200 lines/mm	
Wavelength Range	190~1100nm	320~1100nm
Spectral Bandwidth	2nm	
Wavelength Accuracy	±0.5nm	
Wavelength Repeatability	≤0.2nm	
Photometric Accuracy	±0.002A (0~0.5Abs), ±0.004A (0.5~1.0Abs), ±0.5% T (0~100% T)	
Photometric Repeatability	0.001Abs (0~0.5Abs), 0.002Abs (0.5~1.0Abs), ≤0.2% T (0~100% T)	
Stray Light	≤0.04%T@360nm; 220nm	≤0.04%T@360nm
Stability	±0.001A/h@500nm	
Baseline Flatness	±0.002A	
Noise	0.0005Abs @ 500nm	
Display	480*272 65 thousand true color TFT LCD	
Photometric Mode	T, A, C, E	
Photometric Range	0~200% T, -0.301~3.0A	
Detector	Silicon Photodiode	
Light Source	Deuterium Lamp, Tungsten Lamp	
Input	Membrane Keypad	
Output	USB Print and data output, Connect PC	
Standard Accessories	1cm glass cuvette*4, 1cm quartz cuvette*2, 1cmquadruple cuvette holder*1, Scanning software(only for PC type)	1cm glass cuvette*4, 1cmquadruple cuvette holder*1, Scanning software(only for PC type)
Optional Accessories	1cm standard single slot cuvette holder, long optical path cuvette holder, cuvette, micro cuvette, test tube type absorber rack, solid sample holder, deuterium lamp(only for UV series), tungsten lamp, quadruple cuvette holder, printer, four-slot water bath type constant temperature absorption pool, X-Y Adjustable Micro Absorption Pool, single bath type constant temperature absorption pool, program-controlled thermostatic absorption pool seat, 8 racks, reflection accessories, general application software or Scanning software(not for PC type)	
Power Supply	AC 85~265V, 50/60Hz	
Package Size(W*D*H)	620*500*370mm	
Gross Weight	18kg	16.5kg



Scanning UV/VIS Spectrophotometer

Features:

- * Environmental Deuterium lamp, preventing from Ozone inhalation.
- * Socket-Type Deuterium lamp and Tungsten lamp.
- * SiO₂ coating optical mirror, reduces the influence from outside.
- * GLP self-check function:check the wavelength accuracy and Photometry accuracy, provide test report and power-off protection.
- * Wavelength calibration, wavelength setting, change lamp source and dark current calibration automatically.



Basic Functions:

- * **Photometry**
Test Abs., Transmittance and Energy by fixed wavelength.
- * **Quantitative**
Linear fit and Linear fit through zero two modes
a. Coefficient, Standard Sample input and Standard Sample read three modes to establish standard curve.
b. Establish $A=K1 \cdot C + K0$, can search original data, graph curve, parameters settings.
c. Can save 240 group curves, can test 240 data in each curve.
d. Double wavelength, Triple wavelength test functions.
- * **Kinetics**
Used for time course scanning or reaction rate calculations $\Delta A/t$, can search all data.
- * **Multi-Wavelength**
Can test Transmittance and Abs. with 8 different wavelengths at most.
- * **Scanning**
User can set the scan range from 190nm to 1100nm to test the max. Abs. peak value, can do derivation, arithmetical operations to the graph.
- * **Biology**
DNA/Protein(Optional: UV, Lowry, BCA, CBB and Biuret)

Technical Parameters:

Model	BK-S360	BK-S380	BK-S390
Optical System	Single Beam, Grating 1200 lines/mm		
Wavelength Range	190~1100nm		
Spectral Bandwidth	1.8nm	1nm	0.5, 1, 2, 4, 5nm
Wavelength Accuracy	±0.3nm		
Wavelength Repeatability	≤0.2nm		
Photometric Accuracy	±0.002A(0~0.5Abs), ±0.004A(0.5~1.0Abs), ±0.3%T(0~100%T)		
Photometric Repeatability	0.001Abs(0~0.5Abs), 0.002Abs(0.5~1.0Abs), ≤0.1%T(0~100%T)		
Stray Light	≤0.04%T@360nm; 220nm		
Stability	±0.001A/h@500nm		
Baseline Flatness	±0.0015A		
Noise	±0.0004Abs		
Display	65 thousand true color 7 inch TFT LCD (480*800)		
Photometric Mode	T, A, C, E		
Photometric Range	0~200% T, -0.301~3.0A		
Detector	Silicon Photodiode		
Light Source	Deuterium Lamp, Tungsten Lamp		
Input	Membrane Keypad		
Output	USB-A*2 Print and data output USB-B Connect PC		
Standard Accessories	1cm glass cuvette*4, 1cm quartz cuvette*2, 1cm quadruple cuvette holder, scanning software		
Optional Accessories	1cm standard single slot cuvette holder, long optical path cuvette holder, cuvette, micro cuvette, test tube type absorber rack, solid sample holder, deuterium lamp, tungsten lamp, quadruple cuvette holder, printer, four-slot water bath type constant temperature absorption pool, X-Y Adjustable Micro Absorption Pool, single bath type constant temperature absorption pool, program-controlled thermostatic absorption pool seat, 8 racks, reflection accessories		
Power Supply	AC 85~265V, 50/60Hz		
Package Size(W*D*H)	740*570*440mm		
Gross Weight	25kg		

Double Beam Scanning UV/VIS Spectrophotometer

Features:

- * Environmental Deuterium lamp, preventing from Ozone inhalation.
- * Real-time monitoring the lifetime of Deuterium lamp and Tungsten lamp.
- * Socket-Type Deuterium lamp and Tungsten lamp.
- * GLP self-check function:check the wavelength accuracy and Photometry accuracy, provide test report and power-off protection.
- * Wavelength calibration, wavelength setting, change lamp source and dark current calibration automatically.
- * SiO₂ coating optical mirror, reduces the influence from outside.



Basic Functions:

- * **Photometry**
Test Abs., Transmittance and Energy by fixed wavelength.
- * **Quantitative**
Linear fit and Linear fit through zero two modes
a. Coefficient, Standard Sample input and Standard Sample read three modes to establish standard curve.
b. Establish $A=K1 \cdot C + K0$, can search original data, graph curve, parameters setting.
c. Can save 240 group curves, can test 240 data in each curve.
d. Double wavelength, Triple wavelength test functions.
- * **Kinetics**
Used for time course scanning or reaction rate calculations $\Delta A/t$, can search all data.
- * **Multi-Wavelength**
Can test Transmittance and Abs. with 8 different wavelengths at most.
- * **Scanning**
User can set the scan range from 190nm to to test the max. Abs. peak value, can do derivation, arithmetical operations to the graph.
- * **Biology**
6 methods: DNA/Protein, UV, Lowry, BCA, CBB and Biuret.

Technical Parameters:

Model	BK-D560	BK-D580	BK-D590
Optical System	Double Beam, Grating 1200 lines/mm		
Wavelength Range	190~1100nm		
Spectral Bandwidth	1.8nm	1nm	0.5, 1, 2, 4, 5nm
Wavelength Accuracy	±0.3nm		
Wavelength Repeatability	≤0.2nm		
Photometric Accuracy	±0.002A(0~0.5Abs), ±0.004A(0.5~1.0Abs), ±0.3%T(0~100%T)		
Photometric Repeatability	0.001Abs(0~0.5Abs), 0.002Abs(0.5~1.0Abs), ≤0.2%T(0~100%T)		
Stray Light	≤0.04 T@360nm; 220nm		
Stability	±0.0003A/h@500nm		
Baseline Flatness	±0.0005A		
Noise	±0.0002Abs		
Display	65 thousand true color 7 inch TFT LCD(480*800)		
Photometric Mode	T, A, C, E		
Photometric Range	0~200% T, -0.301~3.0A		
Detector	Silicon Photodiode		
Light Source	Deuterium Lamp, Tungsten Lamp		
Input	Membrane Keypad		
Output	USB-A*2 Print and data output USB-B Connect PC		
Standard Accessories	Scanning software, 1cm standard single slot cuvette holder, 1cm glass cuvette*4, 1cm quartz cuvette*2		
Optional Accessories	1cm standard single slot cuvette holder, long optical path cuvette holder, cuvette, micro cuvette, test tube type absorber rack, solid sample holder, deuterium lamp, tungsten lamp, quadruple cuvette holder, printer, four-slot water bath type constant temperature absorption pool, X-Y Adjustable Micro Absorption Pool, single bath type constant temperature absorption pool, program-controlled thermostatic absorption pool seat, 8 racks, reflection accessories		
Power Supply	AC 85~265V, 50/60Hz		
Package Size(W*D*H)	740*570*440mm		
Gross Weight	25kg		

UV/VIS Spectrophotometer Accessories

			
1cm standard single slot cuvette holder	Long optical path cuvette holder	Cuvette	Micro cuvette
			
Test tube type absorber rack	Solid sample holder	Deuterium lamp	Tungsten lamp
			
Quadruple cuvette holder	Printer	Four-slot water bath type constant temperature absorption pool	Reflection accessories
			
8 racks	X-Y Adjustable Micro Absorption Pool	Single bath type constant temperature absorption pool	Program-controlled thermostatic absorption pool seat

Flame Spectrophotometer

Application:

It is an analytical instrument based on the principle of emission spectroscopy. It uses the thermal energy of flame to excite a certain element to emit light to analyze the content of a certain element in a substance. It is widely used in the analysis and determination of agricultural fertilizers, soil, cement, ceramics and silicate industries, as well as pathological research in medical care.

Features:

- * One-touch ignition, easy operation. 7-inch color touch LCD capacitive screen, intuitive reading.
- * Element concentration reading function, automatic correlation coefficient calculation function (excluding BK-FP640).
- * Can store 20 sets of standard curves and 20 sets of test data. Use LPG as gas.
- * Direct reading of gas flow is adjustable. Gas leak alarm, automatic gas cut-off function.
- * Accidental flameout, automatic shutdown protection. Multiple language support.
- * With USB communication port, can be directly connected to the computer for convenient data analysis.
- * Optional built-in printer and professional data processing software.
- * Detection range screen switching function (depending on the specific model).



Technical Parameters:

Model	BK-FP6450	BK-FP6440	BK-FP6431	BK-FP6430	BK-FP6410	BK-FP640
Test element	K/ Na/ Li/ Ca/ Ba	K/ Na/ Li/ Ca	K/ Na/ Ca	K/ Na/ Li	K/ Na	K/ Na
Channel Qty.	5	4	3		2	
LOD (ppm)	K	≤0.156				
	Na	≤0.184				
	Li	≤0.1035	/	≤0.1035	/	/
	Ca	≤2		/	/	/
	Ba	≤6.028	/	/	/	/
Linear Error (ppm)	K	≤0.195				
	Na	≤0.69				
	Li	≤0.1449	/	≤0.1449	/	/
	Ca	≤3		/	/	/
	Ba	≤9.402	/	/	/	/
Test Range (ppm)	K	0.15-100				
	Na	0.18-100				
	Li	0.1-30	/	0.1-30	/	/
	Ca	0.1-1000		/	/	/
	Ba	0.1-300	/	/	/	/
Response time	8s					
Sample uptake	<3ml/ min					
Stability	≤3%(15s), ≤15%(6min)					
Reproducibility	≤2%					
Air Compressor	External					
Printer	Optional built-in thermal printer					/
Com	USB					/
Fuel	LPG					
Standard Accessories	LPG reducing Valve, Stainless steel bellows for LPG, Silica gel tubing for waste liquid, PU tubing for air, Air Compressor					
Optional Accessories	FP Atomizer, Built-in Thermal printer, Software					
Power	AC 110/220V, 50/60Hz					
Package Size(W*D*H)	570*530*400mm					
Gross Weight	18kg					

Fluorescence Spectrophotometer

Applications:

Fluorescence analysis can provide information including excitation and emission spectrum, emission light intensity and measurement of life of emission light and polarization fluorescence etc and a wide lineal range of working curve. This method has been used in: Medical science and clinical ,Pharmaceutical science and pharmacology,Biochemistry ,Food industry, Pollution and Organic and inorganic chemistry.



BK-F96PRO



BK-F93

Features for BK-F96PRO:

- * Two operation modes fluorescence intensity and luminous intensity.
- * 365nm exciting wavelength, Raman peak of water S/N ≥150.
- * 10 stages emission spectrum scanning.
- * Support off-line mode and on-line mode.

Features for BK-F93 :

- * 1200 line diffraction grating emission monochromator.
- * LED is a cold-light source with longevity, lower background & reliability, prevent from thermo-pollution.
- * Automatic zero adjustment and automatic background subtraction.
- * Eight stage sensitivity adjustment, Real time fluorescence value display and concentration print out,Extra wide dynamic range of fluorescence value ensures accurate measurement of minute changes in micro samples.

Technical Parameters:

Model	BK-F96PRO	BK-F93
Light Source	Hamamatsu 150W Xenon lamp	4 digits LED
Excitation Filter	Interference optical filter a) Standard set is equipped with an interference optical filter of central wavelength at 365nm and 10nm bandwidth b) An optional interference optical filter of 25mm diameter of fixed wavelength select from range 250–700nm can be provided on users demand	LED options a) Standard set includes LED at wavelength 365nm b) The A set includes LED wavelength at 365nm, 376nm, 392nm, 405nm c) Customizable wavelength from 360nm to 600nm
Emission Monochromator	C-T diffraction grating (Em 200~900nm, bandwidth 10nm)	360~650nm (C-T diffraction grating)
Wavelength Accuracy	±1nm	±2nm
Wavelength Repeatability	≤0.5nm	≤1nm
Sensitivity	Raman peak of water in 1cm quartz fluorescence cuvette with S/N≥150	1*10 ⁻⁹ g/ml (Standard aqua of the sulfuric acid quinine, 12nm bandwidth)
Linear Measurement(r)	≥0.995	
Stability	better than 1.5%/10min	better than 3%/10min
Response Time	(0.1~4)s, 6 stages adjustable	(0.1~4)s
Fluorescence Display Value	0.00~600.00	0.00~250.00
Standard Accessories	365nm filter(Pre-assembled), 1 pc F96PRO software package, 1 pc USB interface, 1 pc Quartz fluorescence sample cell10mm, 1 pair	RS232 serial port, Glass fluorescence cuvette 10mm 1 pair
Optional Accessories	Fuses(2A/5A), 200~700nm interference optical filter (φ25mm) Quartz fluorescence sample cell10mm, Multi-function fluorescent sample rack holder, Membrane sample rack, Powder sample rack, Sample cell jacket, Octave Filters 200uL microcentrifuge tube accessory Upconversion fluorescent accessory	Data processing software package (pack, for PC) Fuses(2A) Quartz fluorescence cuvette10mm Optional LED A Set includes: 365nm、376nm、 392nm、 405nm
Power Supply	AC 110/220V, 50/60Hz	
Package Size(W*D*H)	550*540*380mm	450*420*310mm
Gross Weight	13kg	9kg

Atomic Absorption Spectrophotometer



BK-AA3618

BK-AA3638/3668

Introduction:

BK-AA3618 is a dedicated flame atomic absorption spectrophotometer, BK-AA3638 and BK-AA3668 are integrated systems combining both flame and graphite furnace atomization technologies. These instruments are widely utilized in environmental monitoring, food safety testing and metallurgical analysis for the accurate determination of trace and major elements.

Features:

- * Total reflection optical system ensures excellent signal-to-noise ratio of the instrument.
- * Eight-lamp position with 360° rotation design.
- * Workstation software under MS Windows system, featuring concise, professional, automatic and full operation.
- * QA/QC functions: For each test, the SD and RSD of absorbance are submitted, while the SD and RSD of calculated concentration are provided; the working curve for standard samples automatically checks the correlation coefficient.
- * Full information measurement: Each measurement saves results from different data processing methods (average, peak height, peak area, and statistical results) for user analysis.
- * One-click database quickly completes settings such as wavelength, spectral bandwidth, lamp current, negative high voltage, and energy balance.
- * Graphite Furnace Heating Method: Longitudinal heating of the graphite furnace (ensures uniform gas-phase temperature inside the graphite tube, allowing the sample to reach atomization temperature simultaneously and instantaneously, thereby improving atomization efficiency and measurement accuracy, ensuring more reliable analytical results, reducing performance requirements for the furnace body, and extending its service life)(Only for BK-AA3638 & BK-AA3668).

Technical Parameters:

Model		BK-AA3618	BK-AA3638	BK-AA3668
Instrument Type		Flame system	Flame & GFAA integrated system	
Optical System	Beam Type	Double-beam		
	Diffraction Grating	Groove 1800lines/mm, blaze wavelength 250nm		
	Wavelength Range	185~900nm		
	Spectral Bandwidth	0.1, 0.2, 0.4, 0.7, 1.4, 2.0nm		
	Wavelength Accuracy	±0.15nm	±0.2nm	±0.15nm
	Wavelength Repeatability	≤0.05nm	≤0.1nm	≤0.05nm
	Spectral Bandwidth Deviation	±0.02nm		
	Lamp Stand	8(Support simultaneous preheating of 1~4 lights)		
Photometric Performance	Reading Modes	Transmittance, absorbance, concentration		
	Photometric Range	0~125%T, -0.1~3.00Abs		
	Baseline Stability	Drift ±0.002Abs (Steady 30min) Drift ±0.004Abs (Dynamic 15min)	Drift ±0.003Abs (Steady 30min) Drift ±0.005Abs (Dynamic 15min)	Drift ±0.002Abs (Steady 30min) Drift ±0.004Abs (Dynamic 15min)
		Background Correction Ability	Deuterium lamp: ≥40 fold(at 1Abs) Self-reversal: ≥80 fold(at 1Abs)	Deuterium lamp: ≥40 fold(at 1Abs)
	Flame Analysis	Characteristic Concentration	Flame method for Cu: ≤0.02µg/mL	Flame method for Cu: ≤0.035µg/mL
Detection Limit		Flame method for Cu: ≤0.004µg/mL	Flame method for Cu: ≤0.006µg/mL	Flame method for Cu: ≤0.004µg/mL
Repeatability		Flame method for Cu: ≤0.5%	Flame method for Cu: ≤0.6%	Flame method for Cu: ≤0.5%
Burner		Titanium burner head		
Nebulizer		High-efficiency glass nebulizer		
Safety Features		Flame gas & auxiliary gas abnormal pressure protection		
Graphite Furnace Analysis	Characteristic Mass	/	Cd ≤0.6pg Cu ≤20pg	Cd ≤0.5pg Cu ≤20pg
	Detection Limit	/	Cd ≤1.0pg Cu ≤25pg	Cd ≤0.8pg Cu ≤25pg
	Repeatability(Cd)	/	≤3%	≤2.5%
	Graphite Furnace Temperature Range	/	RT~3000°C	
	Heating Rate	/	Maximum 2000°C/s	
	Safety Features	/	Alarms for cooling water flow, protective gas pressure, furnace body temperature, power supply temperature, and graphite tube installation	
Data Processing	Calculation Method for Concentration	Standard curve method(6 linear and non-linear fitting methods), standard addition method, interpolation method		
	Number of Repeated Measurements	1~30 times; calculates and provides the average value, standard deviation and relative standard deviation of absorbance and concentration		
Standard Accessory		Element lamp(Cu*1), oil-free air compressor, software, U disk	Element lamp(Cu*1, Cd*1), oil-free air compressor, software, U disk, graphite tube*5, pipette*1(5~50µl), pipette tip*1000(200µl)	
Optional Accessory		Oxygen-enriched high-temperature flame, hydride generator, audit trailing software, flame autosampler	Oxygen-enriched high-temperature flame, hydride generator, audit trailing software, recirculating chiller, graphite furnace autosampler, flame autosampler	
Power Supply		AC 220V, 50/60Hz		
External Size(W*D*H)		830*650*560mm		
Package Size(W*D*H)		1010*780*830mm		
Net Weight		85kg	120kg	125kg
Gross Weight		135kg	183kg	

BK-AA220AES Atomic Absorption Spectrophotometer



Introduction:

BK-AA220AES flame graphite furnace integrated atomic absorption spectrophotometer, as an important precision instrument for metal analysis, has many advantages such as good selectivity, wide application range, high sensitivity, simple and fast operation, low analysis cost and high accuracy. It was widely used in industrial and livelihood fields such as geology, mining, metallurgy, agriculture, forestry, soil and fertilizer, hydrology and environmental protection, petrochemical industry, food and drug hygiene, and third-party testing.

Features:

- * The flame and graphite furnace analysis device is fully automatic switching, convenient for time-saving, one click in place.
- * The flame system adopts high-reliability flow control and has automatic control such as automatic ignition.
- * Graphite furnace system built-in multiple temperature control protection system, using double air circuit breaker and other design methods, effectively preventing current overload or abnormal temperature rise.
- * Equipped with a reliable gas-liquid separation system, gas filter, and other accessories to ensure the working condition of the instrument when the ambient humidity is high and the gas source is limited.
- * Equipped with multiple safety interlocking devices and prompt information protection functions, the instrument has an automatic power outage, alarm prompts protection in case of abnormal situations involving safety.
- * The instrument features a modular design for easy customer replacement or repair.
- * The instrument supports functional extensions such as hydride method.

Technical Parameters:

Model	BK-AA220AES
Wavelength Range	170~900nm
Spectral Bandwidth	0.1, 0.2, 0.4, 1.6nm
Wavelength Accuracy	±0.1nm
Wavelength Repeatability	≤0.05nm
Detector	Photomultiplier tube detector
Baseline Stability	Drift ≤0.002Abs, noise ≤0.001Abs(Steady 30min) Drift ≤0.002Abs, noise ≤0.001Abs(Dynamic 15min)
Resolution	Spectral bandwidth deviation ≤0.02nm Manganese double line valley to peak energy ratio ≤25%
Characteristic Concentration /Content	Flame method for Cu: ≤0.025µg/mL/1% Graphite furnace method for Cd: ≤0.5pg

Technical Parameters:

Model	BK-AA220AES
Detection Limit	Flame method for Cu: ≤0.002µg/mL Graphite furnace method for Cd: ≤0.4pg
Preciseness	Flame method for Cu: ≤0.3% Graphite furnace method for Cd: ≤2.0%
Background Correction Ability	Deuterium lamp calibration 1.0Abs, background ≥90 times Self-absorption method correction 2.0Abs, background ≥90 times
Diffraction Grating	Groove 1800lines/mm, blaze wavelength 250nm
Lamp Stand	8(Support simultaneous preheating of 1~4 lights)
Standard Accessory	Element lamp(Cu*1, Cd*1, Hg*1), software working station
Optional Accessory	Wide slit combustion head, adjustable nebulizer, hydride vapor generator, audit trailing software, oil-free air compressor, recirculating cooling water system, computer, printer, autosampler, oxygen-enriched high-temperature flame
Power Supply	AC 220V, 50Hz
External Size(W*D*H)	Main unit: 1020*530*500mm GF power supply: 350*530*430mm
Package Size(W*D*H)	Main unit: 1280*750*830mm GF power supply: 610*670*810mm
Net Weight	Main unit: 85kg GF power supply: 32kg
Gross Weight	Main unit: 160kg GF power supply: 70kg

Flame System

Air-acetylene Burner	100mm all-titanium burner
Atomization Chamber System	Integrally molded from polyphenylene sulfide
Burner System	Burner head height and horizontal position automatic adjustment, with burner angle rotatable
Gas Flow Control System	Automatic ignition/fame-out
Safety System	Emergency shutdown protection switch, automatic gas cut-off/shutdown/alarm in case of abnormal status, abnormal air pressure, ignition failure, gas leakage, abnormal flow rate, etc.


Graphite Furnace System

Temp. Control Mode	Optical and constant voltage
Heating Mode	Slope and stepped temperature programming
Temp. Range	RT~3000℃
Heating Rate	≥3000℃/s
Precision Error	≤1%
Graphite Tube Type	Straight, platform, concave type
Water & Gas Control Monitoring System	Inner gas, external gas and make up gas are controlled separately. Circulating water and gas flows monitoring system is equipped
Safety System	Graphite furnace cut-off high current protection switch, automatic pause/cooling/alarm in case of abnormal furnace state/water and gas circuit control failure/graphite tube problem/temperature control failure, etc.

Software Working Station

Smart Optimization	One-key operation for instrument optimization, supporting multi-task analysis
Repeat Measurement	1~99 replicates with auto-calculation of mean/SD/RSD
Print/Export Reports	Word/Excel supported
Auto-Calibration	Curve fitting, re-slope & concentration calculation, incl. standard addition method

BK-AA180B Atomic Absorption Spectrophotometer

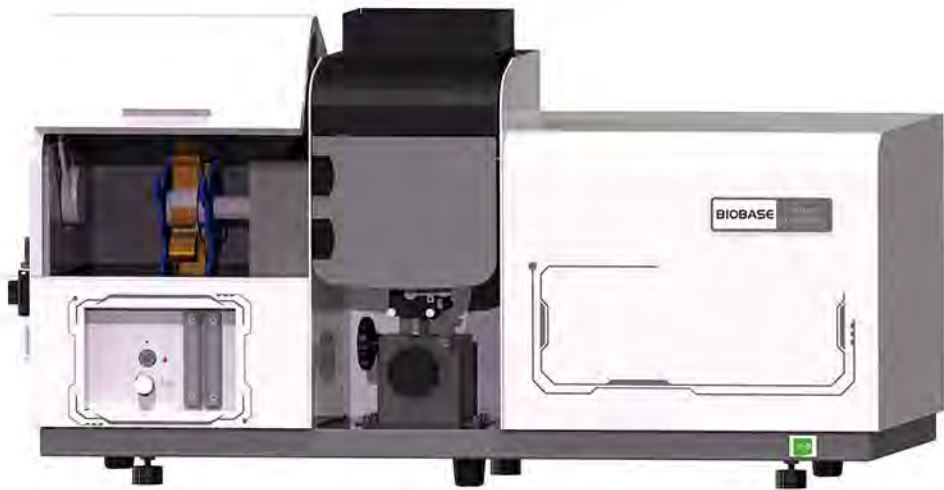

Introduction:

BK-AA180B features an 8-lamp turret design, a flame atomizer, 6-level spectral bandwidth adjustment, and deuterium lamp background correction. It is suitable for the detection of over 30 flame-analysis elements, with a quantitative concentration reaching the mg/L (10^{-6}) level and a detection concentration as low as $\mu\text{g/L}$ (10^{-9}). It is widely used in industries such as geology and mining, metallurgy, materials science, agriculture, forestry, soil and fertilizer, petroleum and chemical engineering, as well as third-party testing.

Features:

- * The instrument features a 20mm thick cast aluminum integrated optical platform with a suspended design, delivering exceptional stability of better than 0.002Abs/30min.
- * The flame atomizer system utilizes aerospace-grade polyphenylene sulfide (PPS) material with a molded one-piece construction, offering exceptional flame resistance, corrosion resistance, and high-temperature durability for extended service life.
- * The industrial-grade TA2 pure titanium burner, precision-finished with slow wire-cutting technology, provides excellent corrosion resistance and supports interchangeable wide-slit designs for high-salt sample analysis.
- * The next-generation flame control system integrates continuously adjustable gas flow, real-time status indicators, dual safety interlocks, and automatic ignition for reliable operation in demanding environments.
- * The optional oxygen-enriched flame upgrade achieves temperatures exceeding 2700°C without nitrous oxide, enabling precise determination of high-temperature elements like Ca, Al, Ba, Mo, Ti, and V.
- * Network port communication mode, offering significantly improved stability and data transfer rates compared to legacy interfaces like RS-232 and RS-485.

Technical Parameters:

Model	BK-AA180B
Wavelength Range	170~900nm
Spectral Bandwidth	0.1, 0.2, 0.4, 0.8, 1.6, 2.4nm
Wavelength Accuracy	±0.1nm
Wavelength Repeatability	≤0.05nm
Detector	Photomultiplier tube detector
Baseline Stability	Drift ≤0.002Abs, noise ≤0.001Abs(Steady 30min) Drift ≤0.002Abs, noise ≤0.001Abs(Dynamic 15min)
Resolution	Spectral bandwidth deviation ≤0.02nm Manganese double line valley to peak energy ratio ≤25%
Characteristic Concentration	Flame method for Cu: ≤0.025μg/mL/1%
Detection Limit	Flame method for Cu: ≤0.002μg/mL
Preciseness	Flame method for Cu: ≤0.3%
Background Correction Ability	Deuterium lamp calibration 1.0Abs, background ≥90 times
Diffraction Grating	Groove 1800lines/mm, blaze wavelength 250nm
Lamp Stand	8(Support simultaneous preheating of 1~4 lights)
Standard Accessory	Element lamp(Cu*1, Hg*1), software working station
Optional Accessory	Oxygen-enriched high-temperature flame, wide slit combustion head, adjustable nebulizer, hydride vapor generator, audit trailing software, oil-free air compressor, computer, printer
Power Supply	AC 220V, 50/60Hz; 110V, 60Hz(Standard)
External Size(W*D*H)	1080*480*560mm
Package Size(W*D*H)	1220*670*840mm
Net Weight	70kg
Gross Weight	140kg

Flame System

Air-acetylene Burner	100mm all-titanium burner
Atomization Chamber System	Integrally molded from polyphenylene sulfide
Burner System	Flame height is adjustable and lockable, with a 360° rotatable combustion seam
Gas Flow Control System	Automatic ignition/fame-out
Reading Mode	Foot pedal operation
Safety System	Emergency shutdown protection switch, automatic gas cut-off/shutdown/alarm in case of abnormal status, abnormal air pressure, ignition failure, gas leakage, abnormal flow rate, etc.

Software Working Station

Smart Optimization	One-key operation for instrument optimization, supporting multi-task analysis
Repeat Measurement	1~99 replicates with auto-calculation of mean/SD/RSD
Print/Export Reports	Word/Excel supported
Auto-Calibration	Curve fitting, re-slope & concentration calculation, incl. standard addition method

BK-AA860B Pro Atomic Absorption Spectrophotometer



Introduction:

BK-AA860B Pro features an advanced 8-lamp design, a flame atomizer, 7-level spectral bandwidth adjustment, and Zeeman background correction. It delivers full-wavelength, full-element analysis with high-precision background compensation, capable of detecting over 30 elements at concentrations ranging from mg/L (10^{-6}) to $\mu\text{g/L}$ (10^{-9}) levels. Ideal for geochemistry, metallurgy, materials science, agriculture, petrochemicals, third-party testing, and academic research.

Features:

- * The flame system uses high-precision mass flow controllers for precise automated flow control.
- * The constant transverse magnetic field Zeeman background correction technology provides superior full-spectrum background absorption correction capability.
- * Built-in cooling water detection and temperature monitoring ensure reliable operation of the magnetic field system.
- * The patented quick-release burner head design solves cleaning challenges, allowing tool-free disassembly in just 3 seconds.
- * A complete gas-liquid separation system and fuel filtration unit ensure stable operation in high-humidity environments or with limited gas supply.
- * Multiple safety interlock mechanisms with automatic shutdown and alarm functions protect against operational anomalies.
- * The modular instrument design and circuit architecture enable easy maintenance and quick component replacement.

Technical Parameters:

Model	BK-AA860B Pro
Wavelength Range	170~900nm
Spectral Bandwidth	0.1, 0.2, 0.4, 0.8, 1.2, 1.6, 2.6nm
Wavelength Accuracy	$\pm 0.1\text{nm}$
Wavelength Repeatability	$\leq 0.05\text{nm}$
Detector	Photomultiplier tube detector
Monochromator	Classic Czerny-Turner configuration
Optical System Focal Length	430mm
Baseline Stability	Drift $\leq 0.0005\text{Abs}$, noise $\leq 0.0005\text{Abs}$ (Steady 60min) Drift $\leq 0.001\text{Abs}$, noise $\leq 0.001\text{Abs}$ (Dynamic 30min)
Resolution	Spectral bandwidth deviation $\leq 0.02\text{nm}$ Manganese double line valley to peak energy ratio $\leq 25\%$
Characteristic Concentration	Flame method for Cu: $\leq 0.03\mu\text{g/mL}/1\%$
Detection Limit	Flame method for Cu: $\leq 0.002\mu\text{g/mL}$
Preciseness	Flame method for Cu: $\leq 0.25\%$
Background Correction Ability	Zeeman correction: $\geq 1.8\text{Abs}$, background ≥ 150 times
Diffraction Grating	Plane diffraction grating (1800 grooves/mm, blazed at 250nm)
Lamp Stand	8(Support simultaneous preheating of 1~4 lights)
Standard Accessory	Element lamp(Cu^*1 , Hg^*1), software working station
Optional Accessory	Wide slit combustion head, adjustable nebulizer, green energy-saving accessories, audit trailing software, oil-free air compressor, computer, printer, recirculating chiller, flame autosampler
Power Supply	AC 220V, 50Hz
External Size(W*D*H)	1010*620*630mm
Package Size(W*D*H)	1220*800*910mm
Net Weight	115kg
Gross Weight	190kg

Flame System

Air-acetylene Burner	100mm all-titanium burner
Atomization Chamber System	Integrally molded from polyphenylene sulfide
Magnetic Field Strength	$\geq 1.0\text{T}$
Reading Mode	Foot pedal operation
Safety System	Emergency shutdown protection switch, automatic gas cut-off/shutdown/alarm in case of abnormal status, abnormal air pressure, ignition failure, gas leakage, water seal, abnormal flow rate, etc.

Software Working Station

Smart Optimization	One-key operation for instrument optimization, supporting multi-task analysis
Repeat Measurement	1~99 replicates with auto-calculation of mean/SD/RSD
Print/Export Reports	Word/Excel supported
Auto-Calibration	Curve fitting, re-slope & concentration calculation, incl. standard addition method

BK-AA4530F Atomic Absorption Spectrophotometer



Standard Aeecssories:



Oil free air compressor



Printer

Features:

- * Completely controlled by PC, can flexibly select the flame and graphite furnace atomizer (optional).
- * Integrated floated optical platform design improves the optical system shock resistance stable.
- * Eight light stands can be changed automatically and preheat the eight lights meantime as well as optimize the working condition of the hollow cathode lamp.
- * Position adjusting: the flame burner can be set on the best position automatically.
- * Fully automated wavelength scanning and peak searching.
- * Complete safety chains protection equipment: warning and automatic safety protection for the wrong burner connection, leakage of the gas, under voltage of air and the abnormal flameout.
- * Deuterium lamp and self-absorption background calibration.
- * Measuring method: flame absorption method and emission method.
- * Result printing: parameter, data result and diagram.
- * Data processing: more than 500 data self-storage and cut-off storage, the analyzed result is stored in EXCEL format.

Technical Parameters:

Model	BK-AA4530F
Wavelength Range	190~900nm
Spectral Bandwidth	0.1, 0.2, 0.4, 1.0 and 2.0nm
Wavelength Accuracy	≤±0.15nm
Wavelength Repeatability	≤0.04nm
Base Line Stability	≤0.002A/30min (Cu)
Characteristic Concentration	0.02µg/ml/1% (Cu)
Detection Limit	0.004µg/ml (Cu)
Preciseness	≤0.5%
Grating	1800 lines/mm
Inflamer	All-metal titanium burner
Atomizer	Effective glass atomizer
Lamp Stand	8
D2 background Calibration	When the background is 1 A, the background ability should be deducted not less than 50 times; self absorption background deduction method
Power Supply	220V, 50Hz
Packing Size(W*D*H) mm	860*705*755 (Main instrument); 545*445*1385 (Accessories)
Gross Weight(kg)	105 (Main instrument); 100 (Accessories)
Standard Accessories	Software; Inkjet printer; Oil free Air compressor; Acetylene reducing valve; Cu Hollow cathode lamp; Air filter
Optional Accessories	Graphite Furnace 4510GF; Hollow cathode lamp(Ag, Au, Ca, Cd, Cr, Fe, Hg, K, Au, Mg, Mn, Na, Ni, Pb, Zn, Sb, etc), Graphite tubes, Recirculating cooling water system, Hydride generator, Autosampler

Flame System:

Acetylene Air Burner	100mm
Ignition Dynamic Baseline Drift	≤0.006A/30min
Characteristic Concentration	≤0.025µg/ml/1%(Cu)
Related Standard Deviation of the Accuracy	≤0.5%(Cu, absorbance>0.8A) (detection limit Cu≤0.008µg/ml)
Safety System	Can automatically cut off the gas when the pressure is not enough, the power is off, flameout and unconformity of the burner.

Graphite Furnace(Optional):

Max. Temperature	3000℃
Max Heating Speed	≥2000℃/S
Characteristic Quantity	Cd≤0.5*10 ⁻¹² g Cu≤0.5*10 ⁻¹¹ g
Accuracy	Cu≤3% Cd≤3%
Safety System	Over current protection Low air pressure alarm/protection; Low cooling water flow alarm/protection
Power Supply	220V, 50Hz
Consumption	7000W
Packing Size(W*D*H) mm	740*640*700
Gross Weight(kg)	90

BK-AA320N Atomic Absorption Spectrophotometer



Features:

- * Build-in computer data processing and LCD display.
- * **Stability:** Double-beam system can automatically compensate the light source drift and wavelength drift caused by the variation of temperature and electronic circuit drift.
- * **Quickly:** The cathode lamp does not need to be pre-heated for long time and sample can be analyzed immediately.
- * **High precision of measurement:** Gas path system is equipped with precision pressure stabilizing and current stabilizing devices to reach stable flame and low noise. Specially designed fine light beam passes through the flame to ensure a high precision analytical test and low characteristic concentration.
- * **High energy optical path.**
- * **Long-life and anti-corrosive atomization system.**
- * **Multi-functional analysis mode:** ① flame absorption, ② flame emission, ③ graphite furnace atomic absorption, ④ hydride generation.
- * **Safe and reliable gas path system:** Special devices of quick gas conversion and safety protection can be used to analyze air-acetylene flame and extend the analytic elements to reach more than 60.

Technical Parameters:

Model	BK-AA320N
Wavelength Range	190~900nm
Wavelength Accuracy	±0.5nm
Wavelength Repeatability	±0.3nm (single direction)
Spectral Bandwidth	0.2nm, 0.4nm, 0.7nm, 1.4nm, 2.4nm, 5.0nm
Grating	1800 lines/mm
Resolution	<40%
Base Line Stability	±0.004Abs/30min
Characteristic Concentration	≤0.04µg/ml/1% (Cu)
Detection Limit	≤0.008µg/ml (Cu)
Background Calibration	>30 times
Power Supply	220V, 50Hz
Package Size(W*D*H)	1250*795*765mm (Main instrument), 545*445*1385mm (Accessories)
Gross Weight	138kg (Main instrument), 56kg (Accessories)
Standard Accessories	RS232 serial port, Oil-free air compressor, Glass Atomizer, Cu Hollow cathode lamp, Atomizer unit Burner unit Dust cover, Water-separating gas filter, Titanium burner-10cm
Optional Accessories	Software, Model GA3202 HGA graphite furnace system, Hydride generator, Graphite tubes, Recirculating cooling water system, Hollow cathode lamp(Ag, Au, Ca, Cd, Cr ,Fe, Hg ,K ,Mg ,Mn, Na, Ni, Pb, Zn, AS, etc)

NIR Spectrophotometer



Introduction:

NIR spectrophotometer, mainly used for liquid samples qualitative and quantitative analysis, applies to gasoline, drinks, milk and other areas of nutrients, water chemistry and other physical properties of the rapid non-destructive analysis determination. The instrument monitors the ambient temperature and humidity in real time and stores it in the spectrum file, which is convenient for users to check and optimize the measurement conditions.

Features:

- * Single-channel whole spectrum scanning.
- * Built-in high-quality PTFE reference module and polystyrene wavelength standard filter.
- * Automatic reference calibration and monitoring wavelength.

Technical Parameters:

Model	BK-S430
Optical System	Grating monochromator
Bandwidth	8nm
Wavelength Range	900~2500nm
Wavelength Accuracy	≤ 0.2nm
Wavelength Reproducibility	≤0.05 nm
Stray Light	≤0.1%
Scanning Time	1 minute or adjustable
Noise	≤0.0005 Abs
Interface	USB
Standard Accessories	2*1cm quartz square sample cell, 2*2mm quartz micro sample cell
Optional Accessories	Laptop
Power Supply	AC 110~240V, 50/60Hz
Package Size(W*D*H)	550*540*380mm
Gross Weight	12kg

FT-IR Spectrometer



Introduction:

Fourier Transform Infrared (FT-IR) Spectrometer is a precision analytical instrument used for identifying and analyzing the molecular structure of substances. Compared to traditional dispersive infrared spectrometers, FT-IR offers significant advantages including faster scanning speed, higher sensitivity, better resolution, and greater wavelength accuracy. These models obtain the best balance between intelligence and convenient operation, advance performance and low operation and maintenance cost. It is a good choice for basic science research analysis, production quality control, testing and detection in various fields.

Features:

- * High sensitivity optical system: Cube-corner Michelson interferometer combined with patented fixing mirror alignment technology, reflecting mirrors are coated with gold to provide the maximum light throughput and ensure the detection sensitivity.
- * High stability modular partition design: compact structure modular design with layout on cast aluminum base and overall balance of mechanical robustness and partition heat dissipation, offering higher ability of deformation resistance and less sensitive to vibrations and thermal variations.
- * Intelligent multi-sealed moisture-proof design: multiple sealed interferometers, large-capacity desiccant cartridge with visible window and easy replacement structure.
- * Innovated integration electronic system: high sensitivity pyroelectric detector pre-amplifier technology, dynamic gain amplification technology, high precision 24-bit A/D conversion technology.

- * Good anti-electromagnetic interference capability: electronic system is designed to meet CE and electromagnetic compatibility requirements.
- * High intensity IR source: external isolated IR source module and large space heat dissipation chamber design provide higher thermal stability and stable optical interference.

Technical Parameters:

Model	BKFT-530A	BKFT-530APro
Detector	LiTaO ₃	DLATGS
Signal to Noise Ratio	Better than 20,000:1 (RMS value, at 2100cm ⁻¹ ~2200cm ⁻¹ , resolution: 4cm ⁻¹ , 1 minute data collection)	Better than 40,000:1 (RMS value, at 2100cm ⁻¹ ~2200cm ⁻¹ , resolution: 4cm ⁻¹ , 1 minute data collection)
Interferometer	Cube-corner Michelson interferometer	
Beam Splitter	Multilayer Ge coated KBr	
IR Source	High intensity, long lifetime, air-cooled IR source	
Wavenumber Range	7800cm ⁻¹ ~350cm ⁻¹	
Resolution	0.85cm ⁻¹	
Wavenumber Accuracy	±0.01cm ⁻¹	
Scanning Speed	Microprocessor control, different scanning speed selectable.	
Software	Main FTOS Suite software workstation, compatible to all version Windows OS. FDA 21 CFR Part11 compliance software (optional)	
Interface	Ethernet & WIFI wireless	
Data Output	Standard data format, report generation and output	
Status Diagnosis	Power on self-check, real-time temperature and humidity monitoring and reminders	
Environment Conditions	Temperature: 10℃~30℃, Humidity: less than 60%	
Standard Accessories	Transmission sample holder	
Optional Accessories	Gas cell, liquid cell, defused/specular reflection, single/multiple reflection ATR, IR microscope, electronic moisture proof box. etc. Among them, the electronic moisture proof box is mandatory optional part	
Power	80W	
Power Supply	AC110V-220V, 50/60Hz	
External Size(W*D*H)	490*420*240mm	
Net Weight	23.2kg	
Packing Size(W*D*H)	Main unit: wooden type 750*630*630mm; carton type 680*580*630mm Electronic moisture proof box: wooden type 930*810*640mm; carton type 850*730*500mm	
Gross Weight	Main unit: wooden type 50kg; carton type 33kg Electronic moisture proof box: wooden type 60kg; carton type 33kg	

Rotary Evaporator



Introduction:

The rotary evaporator is made according to the principle of constant temperature heating and film evaporation under vacuum and negative pressure. The rotary evaporator uses stepless speed regulation to make the glass rotating bottle rotate at a constant speed, and the materials form a large area uniform film on the bottle wall. Then, the rotating bottle is evenly heated by the intelligent constant temperature water bath, evaporated at a high speed under vacuum, and the solvent vapor is cooled by the high-efficiency glass condenser and recycled in the collection bottle.

Application:

Mainly used for concentration, crystallization, drying, separation and solvent recovery in pharmaceutical, chemical and biopharmaceutical industries.

Features:

- * Stepless speed controller
- * PID temperature adjustment
- * Automatic lift control
- * High evaporating and recovery collecting rate

Technical Parameters:

Model	BK-RE-1A
Rotary Bottle	1 L24#(standard size)
Collecting Bottle	0.5L 24 # (standard size)
Glass Material	GG-17
Shelf Material	Spray anti-corrosion steel
Heating Unit Size	250*388*169mm
Chamber Size	φ220*140 mm
Heating Power	1KW
Temp. Range	0-99℃
Temp. Accuracy	±1℃
Temp. Sensor	PT100
Vacuum	0.096Mpa
Rotary Motor	30W
Rotating Speed	0-120rpm
Lift	Motor
Lifting Power	15W
Lifting Stroke	150mm
Speed Control	Stepless speed controller
Sealing Method	Fluorine rubber skeleton oil seal
Condenser	φ85*450mm
Charging Valve	19#(standard size)
Power Supply	220V,50Hz(Standard); 220V,60Hz(Optional)
External Size(W*D*H)	640*340*(860-1010)mm
Package Size(W*D*H)	740*550*580mm
Gross Weight	38kg
Standard Accessory	1 L Rotary Bottle*1, 0.5 L Collecting Bottle*1
Optional Accessory	Vacuum pump, Recirculating chiller, Transparent cover

Rotary Evaporator

Features:

- * The main frame is made of aluminum alloy, and the inner pot is made of 304 stainless steel, offering durability and an attractive appearance.
- * The sealing system utilizes a PTFE + FKM composite seal to maintain a high vacuum level.
- * An integrated condenser and upright double-layer serpentine coil ensure high recovery rates.
- * Electronic stepless speed regulation with forward and reverse rotation, fine-tuned by a knob, and a digital speed display for easy operation.
- * Thermostatic bath features an LCD digital display and a PT100 sensor at the bottom of the bath, dual temperature control, and dry-boil protection.
- * Manual weight-balanced lift for the main unit.
- * Dual fuses for rotation and heating provide enhanced safety.



Technical Parameters:

Model	RE-2012
Rotary Bottle	1L 29# Standard opening
Collecting Bottle	1L 35# Ball mill opening
Condenser	Vertical $\phi 80 \times 370$ mm
Charging Valve	19#(Standard size)
Rotary Speed	10~310rpm (Can rotate forward and reverse)
Vacuum	399.9Pa(3mmHg)
Temp. Range	RT~99°C
Temp. Accuracy	$\pm 1^{\circ}\text{C}$
Lifting Stroke	170mm
Rotary Motor Power	30W
Heating Power	1300W
Evaporating Speed	23ml/min
Sealing Part	PTFE+Fluororubber composite sealing ring
Condensing Area	0.15m ²
Pot Capacity	4.6L
Power Supply	Standard: AC220 50/60Hz; optional: AC110 50/60Hz
Product Size(W*D*H)	600*400*(640~810)mm
Net Weight	11.5kg
Packing Size(W*D*H)	730*550*400mm
Gross Weight	16kg

Patented condenser
with cooling surface
1700cm²

Chemical-resistant
double PTFE sealing

Large digital LCD screen
displays heating temperature
rotation speed and timing



Motorized lifting for quick
and safe operation

Large 5L water-oil
heating bath

Designed a detachable
operating panel allows
remote control

Features:

- * Evaporating flask with an ejector, convenient to remove.
- * 5L water and oil bath dual-purpose heating pot, heating temperature can reach 180°C, easy to switch between water and oil bath heating modes.
- * Patented technology condenser, high recovery rate, condensing effect Outstanding.

Technical Parameters:

Model	RE 100-Pro
Item No.	6010110111
Evaporating Flask	1L(NS 29/32, 18300120)
Receiving Flask	1L(KS 35/20, 18300110)
Display	LCD
Rotating Speed	20~280rpm
Temp. Range	RT~180°C
Temp. Accuracy	Water bath: $\pm 1^{\circ}\text{C}$; Oil bath: $\pm 3^{\circ}\text{C}$
Lift	Motor
Stroke Height	150mm
Timing Range	1~999min
Motor	DC brushless motor
Heating Power	1300 W
Stroke Displacement	Automatic 150mm
Protection Class	IP20
Rotation	Reversible Direction
Interface	USB
Power	1400W
Power Supply	AC110/220V $\pm 10\%$, 50/60Hz(Customizable)
External Size(W*D*H)	465*457*583 mm
Package Size(W*D*H)	640*1100*650mm
Net Weight	15kg
Gross Weight	36kg
Standard Accessory	Condenser(1700cm ²)*1, 1L Evaporating flask*1, 1L Receiving flask*1, 5L pot*1
Optional Accessory	Vacuum pump, Recirculating chiller



CCP5-Mini
Recirculating
chiller
(6032200220)



Flow Rate:	
mbar	L/min
1000	25
880	22
750	20
600	12
480	7.5
280	5

C410 Vacuum pump(18900389)
Specifications:
Maximum Vacuum:13mbar
Work Mode: Continuous Operation
Nozzle Size:8mm
Power: 95W
Motor speed:1450rpm

Explosion-proof Rotary Evaporator

Features:

- * LED display.
- * Explosion-proof motor.
- * Explosion frequency inverter.
- * Explosion auto temperature controller.
- * Stepless speed controller.
- * Auto-lifting bath is optional
- * Stainless steel and aluminium alloy structure
- * Anti-corrosive PTFE sealing good performance.



Technical Parameters:

Model	ExRE-1002	ExRE-2002	ExRE-5003
Rotary Bottle	10L (flange Ø95)	20L (flange Ø95)	50L (flange Ø125)
Collecting Bottle	5L (flange φ60-50)	10L (flange φ60-50)	20L (flange φ60-50)
Condenser	Vertical three backflow , φ120*620mm(main), φ135*475mm(SUB)	Vertical three backflow , φ130*700mm(main), φ160*530mm(SUB)	Vertical three backflow, φ160*835mm(main), φ160*530mm(SUB)
Charging Valve	34# (standard size)		40# (standard size)
Rotating Speed	0~120 rpm		
Vacuum	-0.095 Mpa		
Temp. Range	RT~180℃		
Temp. Accuracy	±1℃		
Rotating Power	120W		180W
Heating Power	3KW	5KW	8KW
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V, 60Hz		
External Size(W*D*H)	930*560*1910 mm	1000*600*2130 mm	1330*730*2340 mm
Package Size(W*D*H)	1320*780*755 mm	1350*670*720mm 680*680*790 mm	1420*820*720 mm 830*730*910 mm
Gross Weight	116kg	143kg	195kg
Standard Accessory	10L rotary bottle*1, 5L collecting bottle*1,	20L rotary bottle*1, 10L collecting bottle*1	50L rotary bottle*1, 20L collecting bottle*1
	Explosion-proof transducer, Explosion-proof motor EX120W		
Optional Accessory	Double collection bottle, Auto-lifting, Vacuum pump, Recirculating chiller		

Small Capacity Rotary Evaporator



Features:

- * Intelligent temperature control and digital temperature display.
- * Stepless speed controller.
- * Teflon Sealing and host automatically

Technical Parameters:

Model	RE-2000A	RE-2000B	RE-2000E	RE-52A	RE-52C	RE-5299
Rotary Bottle	1L 24# (standard size)					
Collecting Bottle	1L 35# (ball mill mouth)			0.5L 24# (standard size)		
Condenser	Vertical φ85*430mm,			Vertical φ85*450mm, 29#(standard size)		
Charging Valve	19# (standard size)			19# (standard size)		
Rotating Speed	0~200rpm			0~120rpm		
Vacuum	-0.098Mpa					
Temp. Range	RT~99℃					
Temp. Accuracy	±1℃					
Stroke Height	120mm			150mm		
Rotating Power	40W			30W		
Heating Power	1.5KW			1KW		
Shelf Material	Aluminum alloy			Powder coating anticorrosive		
Chamber Size	φ235*145mm			φ220*120mm		φ245*140mm
Power Supply	Standard: AC220V 50/60Hz; optional: AC110V 60Hz					
External Size(W*D*H)	630*400*690-810mm			640*430*860-1010mm		660*440*880-1030mm
Package Size(W*D*H)	620*620*490mm			600*460*470mm		
Gross Weight	25kg		23kg	19kg	20kg	20kg
Standard Accessory	1000ml rotary bottle*1, 500ml recycling bottle*1					
Optional Accessory	Transparent bath cover, Vacuum pump, Recirculating chiller			Transparent bath cover, Vacuum pump, Recirculating chiller		

Rotary Evaporator



- Features:
- * Electronic stepless speed control.
 - * LED display
 - * Optional explosion-proof function.

Technical Parameters:

Model	RE-201D	RE-301	RE-501	RE-1002	RE-2002	RE-5003
Rotary Bottle	1L 24#standard mouth	3L flange Ø50	5L flange Ø50	10L flange Ø95	20L flange Ø95	50L flange Ø125
Collecting Bottle	1L 35# (ball mill mouth)	2L 35# (ball mill mouth)	3L 35# (ball mill mouth)	5L (flange φ60-50)	10L flange Ø60	20L (flange φ60-50)
Condenser	Vertical φ85*430mm,35# (ball mill mouth)	Vertical φ100*530mm	Vertical φ100*530mm	Vertical three backflow φ120*620mm (main), φ135*475mm (SUB)	Vertical three backflow φ130*700mm (main), φ160*530mm (SUB)	Vertical three backflow φ160*835mm (main), φ160*530mm (SUB)
Charging Valve	19# (standard size)			34# (standard size)		40# (standard size)
Rotary Speed	0~120rpm					
Vacuum				0.095 Mpa		
Temp. Range	RT~180℃					
Temp. Accuracy	±1℃					
Stroke Height	200mm			180mm		
Rotary Power	40W	40W		120W		180W
Heating Power	1KW	2KW		3KW	5KW	8KW
Shelf Material	Stainless steel			Coating anticorrosive		
Chamber Material	SS 245*140mm	SS 265*160mm	SS 280*170mm	SS 350*220mm	SS 450*260mm	SS 550*320mm
Plate Size	280*330mm	350*330mm		534*504mm	474*474mm	550*320mm
Power Supply	Standard: AC220V 50/60Hz; optional: AC110V 60Hz				AC220V, 50/60Hz	Standard: AC 380V 50Hz; optional: AC 220V 50Hz
External Size(mm)	700*330*785	740*330*970	760*330*1030	930*560*1910	1000*600*2130	1330*730*2340
Package Size(mm)	710*540*350	990*620*470		1320*780*755	1350*670*720 680*680*790	1420*820*720 830*730*910
Gross Weight	21kg	40kg	42kg	107kg	136kg	186kg
Standard Accessory	1L Rotary bottle*1; 1L Collecting bottle*1	3L Rotary bottle*1; 2L Collecting bottle*1	5L Rotary bottle*1; 3L Collecting bottle*1	10L Rotary bottle*1; 5L Collecting bottle*1	20L Rotary bottle*1; 10LCollecting bottle*1	50L Rotary bottle*1; 20LCollecting bottle*1
Optional Accessory	Vacuum pump, Recirculating chiller					

Water Circulating Vacuum Pump



Technical Parameters:

Model	SHZ-DIII (Four gauge four pumping)	SHZ-95B
Pump Head	4	5
Speed of Evacuation	10L/Min	
Vacuum	-0.098Mpa	
Circulating Pump Flow	40L/min	80L/min
Pump Lift	12m	
Material	Anti-corrosion	Anti-corrosion or Stainless Steel
Consumption	370W	370W
Capacity	15L	50L
Power Supply	Standard: AC220V 50/60Hz; optional: AC110V 60Hz	
Package Size(W*D*H)	460*370*570mm	520*430*900mm
Gross Weight	17kg	30kg
Applicable Rotary Evaporator Model	BK-RE-1A, RE-2010, RE 100-Pro, RE-2000A, RE-2000B, RE-2000E, RE-52A, RE-52C, RE-5299, RE-201D, RE-301, RE-501	ExRE-1002, ExRE-2002, ExRE-5003, RE-1002, RE-2002, RE-5003

Note: Vacuum pump does not have the function of adjusting vacuum degree, if you need this function, you should match the vacuum control instrument.

Chiller

Recirculating Chiller



CCA-420

DLSB Series

Principle:

This product is mechanically cooled by a fully closed compressor. The inner wall of the cooling tank has a cooling copper coil. The refrigerant (Freon) circulates continuously through the coil of the inner wall of the tank to cool the refrigerant in the tank, and the refrigerant is transported to the sandwich or condensing coil of the supporting equipment through the built-in circulation pump and external circulation pipeline. Indirectly cooling the materials in the reactor, cooling and liquefaction of the condensing pipe contact steam.

This product can generally be connected to the sandwich of the double layer reaction kettle, the rotary evaporator, the condensing coil of the reaction kettle, and can also be used to put the object or container to be cooled directly into the bath for reaction.

From the lower outlet pipeline of the product is connected to the lower inlet pipeline of the kettle body or condenser, and the circulating liquid comes out from the upper circulation port and returns to the inlet of the product through the pipeline, forming a complete circulation space.

Features:

- * Famous manufacturers of original closed compressor, advanced performance, reliable quality.
- * Professional relays, protectors, capacitors, etc., are well-known brands of high-quality equipment to ensure reliability and service life.
- * Digital display temperature control, simple operation, eye-catching.
- * A variety of functions, can provide low temperature quality cooling water, low temperature unfrozen liquid, small low temperature water bath.
- * Can be combined with circulating water type multi-purpose vacuum pump, vacuum freeze-drying oven, rotary evaporator, magnetic stirrer and other instruments, suitable for multi-functional low temperature conditions of chemical reactions, drug storage.
- * It can be matched with a variety of large precision equipment to overcome the difficulty of expensive instruments and equipment that can not be used because of bad cooling water, high temperature and unstable water pressure.

Technical Parameters:

Model	CCA-420	DLSB-5/20	DLSB-20/40
Temp. Display	LED display		
Tank Volume	4L	6.8L	21L
Matching Reaction Kettle(Steam)	1~2L	1~5L	20L
Tank Material	304 Stainless Steel	201 Stainless Steel	
Tank Size	220*155*120mm	Φ220*180mm	Φ300*300mm
Temp. Control Accuracy	±0.1℃		
Display Temp. Resolution	0.1℃		
Pump Lift	1.5~2.7m	4~6m	
Circulating Pump Flow	8~16L/min	20~40L/min	
Refrigerant	R134A	R290	R404A
Refrigerating Capacity	450~260W	2324W	6972W
Pressure	≤0.4Mpa		
Ambient Relative Humidity	70%,Ventilation		
Instrument Temp. Control Range	-20℃~RT		-40℃~RT
Optimum Ambient Temp.	5~35℃		
Unload Min Temp.	-20℃	-20℃	-42℃
Circulation Pump Power	10W	100W	
Circulating Pump	Magnetic pump	Fully-closed &No-leaked special pump	
Circulating Water Mouth Interface	Outer diameter 12 mm		Outer diameter 16 mm
Sensor	PT100		
Coil Diameter	\	Φ185mm	Φ250mm
Opening Size	\	Φ200mm	Φ250mm
Power Supply	AC220V, 50/60Hz	Standard: AC220, 50/60Hz; optional: AC110, 60Hz	AC220V, 50/60Hz
Secure Protection	Overload protection, Overheating protection, Refrigerator delay protector	Leakage, overload circuit breaker, Overload relay circuit, Refrigerator protection timer, Circulating pump thermal protector, Refrigerator high-pressure pressure switch, Temperature control self-diagnosis function	
External Size(W*D*H)mm	520*250*560	485*423*(760+400)	590*670*(975+500)
Package Size(W*D*H)mm	580*300*570	595*435*880	720*590*1140
Gross Weight(kg)	30	58	133
Accessories	In and out joint *1, silicone pipe insulation*2	In and out joint *1, Vertical rod*1, Thermal insulation pipe*2	
Applicable Rotary Evaporator Model	BK-RE-1A, RE-2010, RE-2000A, RE-2000B, RE-2000E, RE-52A, RE-52CRE-5299, RE-201D, RE 100-Pro	RE-301, RE-501	RE-1002, ExRE-1002, RE-2002

Recirculating Chiller



Introduction:

Recirculating chiller can provide cooling water for devices that need cooling or used as a low-temperature thermostatic bath. It is often used with nitrogen analyzer, electrophoresis analyzer, atomic absorption photometer and other equipment, which is a routine instrument in laboratory.

Features:

- * Digital display temperature controller, intelligent temperature control technology.
- * Completely enclosed air-cooled compressor, fast cooling speed.
- * Double-blade circulation pump with large flow rate and high efficiency.

Technical Parameters:

Model	BK-RC610
Temp. Range	5°C~20°C
Temp. Controller	Digital Display
Tank Volume	6L
Pump Flow Rate	10L/min
Pump Lift	10m
Refrigerating Capacity	1490W
Refrigerant	R134A
Power Supply	AC220V/50Hz
Power	850W
Net Weight	25kg
External Size(W*D*H)	570*290*490mm
Package Size(W*D*H)	700*440*610mm
Gross Weight	30kg

Refrigerated and Heating Circulator



BJPX-DL5/10 BJPX-DL5/20
BJPX-DL10/10 BJPX-DL10/20

BJPX-DL10/10-L

Features:

- * Supports both internal and external circulation.
- * The control interface is simple and easy to use, with upper and lower temperature alarms.
- * Has multiple safety protections.
- * Has the timing function.
- * Has the system self-tuning function.

Technical Parameters:

Model	BJPX-DL5/10	BJPX-DL5/20	BJPX-DL10/10	BJPX-DL10/10-L	BJPX-DL10/20
Temperature Control Range	-10~100°C	-20~100°C	-10~100°C	-10~100°C	-20~100°C
Display Mode	LCD				
Temperature Control Accuracy	±0.1°C				
Liquid Storage Capacity	5L		10L		
Cooling Capacity	319~1328W	263~1328W	884~1894W	280~1100W	813~2733W
Refrigerant	R134a				
Control Method	Intelligent digital display PID temperature control				
Refrigerant Cooling Method	Air cooling				
Insulation Material	Rubber and plastic insulation pipe				
Safety Protection	Leakage, overload, delay, overcurrent				
Opening Size	φ190mm		φ200mm	160*120mm	φ200mm
Liquid Storage Tank	φ220*180mm		φ250*250mm	280*200*180mm	φ250*250mm
Circulation Power	40W				
Flow Rate	20L/min			8L/min	20L/min
Maximum Lift	4~6m			2.4m	4~6m
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V, 50/60Hz				
Product Size(W*D*H)	360*520*760mm		360*520*720mm	360*400*850mm	360*520*720mm
Net Weight	38kg		45kg		
Packing Size(W*D*H)	660*860*1150mm		660*860*1150mm	420*530*870mm	660*860*1150mm
Gross Weight	48kg		50kg		

Pipettes

Micro Single Channel Adjustable Pipette

Application:

Mechanical Pipette is suitable for pharmaceutical R&D centers, school laboratories, pharmaceutical and chemical R&D companies, chemical synthesis and other places.

Features:

- * Light weight and ergonomic design to ensure a better sense of use.
- * Digital display, easy to read data.
- * The pipettes cover volume range of 0.5μl to 1ml.
- * Easy to calibrate and maintain.
- * The low part can be autoclaved without affecting performance and comfort.
- * Manufactured from innovative materials.



Technical Parameters:

Cat.No.	Volume	Increment	Test Volume(μl)	Maximum Permissible Systematic Error		Maximum Permissible Random Error	
				%	μl	%	μl
10101001	0.1-2.5μl	0.05μl	0.25	6	0.015	3	0.0075
			1.25	1.5	0.0188	1.8	0.0225
			2.5	0.4	0.01	1.2	0.03
10101002	0.5-10μl	0.1μl	1	1.0	0.01	1.8	0.018
			5	0.4	0.02	0.4	0.02
			10	0.5	0.05	1.1	0.11
10101003	2-20μl	0.5μl	2	0.4	0.008	0.4	0.008
			10	0.4	0.04	0.5	0.05
			20	0.5	0.1	0.4	0.08
10101004	5-50μl	0.5μl	5	2	0.1	1.1	0.055
			25	1.3	0.325	0.7	0.175
			50	0.6	0.3	1.5	0.75
10101005	10-100μl	1μl	10	0.2	0.02	0.9	0.09
			50	0.2	0.1	0.9	0.45
			100	0.3	0.3	0.9	0.9
10101006	20-200μl	1μl	20	0.5	0.1	0.8	0.16
			100	0.3	0.3	0.2	0.2
			200	0.3	0.6	0.1	0.2
10101007	50-200μl	1μl	50	0.2	0.1	0.8	0.4
			100	0.3	0.3	0.2	0.2
			200	0.3	0.6	0.1	0.2
10101008	100-1000μl	5μl	100	0.3	0.3	0.1	0.1
			500	0.3	1.5	0.1	0.5
			1000	0.3	3	0.1	1
10101009	200-1000μl	5μl	200	0.3	0.6	0.1	0.2
			500	0.3	1.5	0.1	0.5
			1000	0.3	3	0.1	1
10101010	1000-5000μl	50μl	1000	0.3	3	0.1	1
			2500	0.3	7.5	0.1	2.5
			5000	0.3	15	0.1	5
10101011	2-10ml	0.1ml	2000	0.4	8	0.1	2
			5000	0.4	20	0.1	5
			10000	0.4	40	0.1	10

Classic Single Channel Adjustable Pipette

Features:

- * Classic single channel adjustable pipette can suck and dispense a certain amount of liquid, and has an adjustable range to adapt to different liquid transfer requirements.
- * The amount of fluid aspirated and dispensed can be precisely adjusted to suit different experimental requirements.
- * Equipped with digital or scale display, convenient for users to quickly read and set the desired volume.
- * According to different experimental requirements, it can provide a variety of specifications and models of pipettes for users to choose.
- * With ergonomic design, precision is more reliable.
- * Resistant to impact, UV and chemical corrosion.



Technical Parameters:

Cat.No.	Model	Volume Range	Increment	Test Volume	Maximum Permissible Systematic Error	Maximum Permissible Random Error
23010100002	BK-AP2.5	0.1~2.5μl	0.05μl	2.5μl	±2.50%	2.00%
				1.25μl	±3.00%	3.00%
				0.25μl	±12.00%	6.00%
23010100010	BK-AP10	0.5~10μl	0.1μl	10μl	±1.00%	0.80%
				5μl	±1.50%	1.50%
				1μl	±2.50%	1.50%
23010100020	BK-AP20	2~20μl	0.5μl	20μl	±0.90%	0.40%
				10μl	±1.20%	1.00%
				2μl	±3.00%	2.00%
23010100050	BK-AP50	5~50μl	0.5μl	50μl	±0.60%	0.30%
				25μl	±0.90%	0.60%
				5μl	±2.00%	2.00%
23010100100	BK-AP100	10~100μl	1.0μl	100μl	±0.80%	0.20%
				50μl	±1.00%	0.40%
				10μl	±3.00%	1.00%
23010100200	BK-AP200	20~200μl	1.0μl	200μl	±0.60%	0.20%
				100μl	±0.80%	0.30%
				20μl	±2.50%	0.80%
23010101000	BK-AP1K	100~1000μl	5.0μl	1000μl	±0.60%	0.20%
				500μl	±0.70%	0.25%
				100μl	±2.00%	0.70%
23010105000	BK-AP5K	1000~5000μl	50.0μl	5000μl	±0.50%	0.20%
				2500μl	±0.60%	0.30%
				1000μl	±0.70%	0.30%
23010110000	BK-AP10K	1000~10000μl	100μl	10000μl	±0.60%	0.20%
				5000μl	±1.20%	0.30%
				1000μl	±3.00%	0.60%

TopPette-Mechanical Pipettes

Features for TopPette:

- * Light weight, ergonomic, low force design
- * Digital display clearly reads volume setting
- * The pipettes cover volume range of 0.1µl to 10ml
- * Easy to calibrate and maintain
- * The lower part is autoclavable
- * Design helps avoid repetitive strain injuries



MicroPette Plus Autoclavable Pipette

Fully Autoclavable:

The MicroPette plus pipettes can be fully autoclaved at 121°C, 1 atm for less than 20 mins. The pipettes can be autoclaved without special preparations. After autoclaving the pipette must be cooled down and dried over 12 hours.

Features for MicroPette plus:

- * Fully autoclavable
- * Light weight, ergonomic, low force design
- * Digital display clearly reads volume setting
- * The pipettes cover volume range of 0.1µl to 10ml
- * Easy to calibrate and maintain
- * Design helps avoid repetitive strain injuries
- * Manufactured from innovative materials



Note: It is recommended to check the performance of the pipette after each autoclaving. It is also recommended to grease the piston and seal of the pipette after each 10 autoclaving.

Technical Parameters:

TopPette Mechanical Pipettes / MicroPette Plus Autoclavable Pipettes (Adjustable and Fixed Volume)

Fixed Volume Pipettes							
TopPette/Qpette Series Cat.No.	MicroPette Plus Series Cat.No.	Volume Range	Test Volume(µl)	Maximуме Permissible Systematic error(Inaccuracy)		Maximуме Permissible Random error(Inaccuracy)	
7010102018/7060102018	7030302018	5µl	5µl	1.3%	0.065µl	1.2%	0.06µl
7010102019/7060102019	7030302019	10µl	10µl	0.8%	0.08µl	0.8%	0.08µl
7010102020/7060102020	7030302020	20µl	20µl	0.6%	0.12µl	0.5%	0.1µl
7010102021	7030302021	25µl	25µl	0.5%	0.125µl	0.3%	0.075µl
7010102022/7060102022	7030302022	50µl	50µl	0.5%	0.25µl	0.3%	0.15µl
7010102023/7060102023	7030302023	100µl	100µl	0.5%	0.5µl	0.3%	0.3µl
7010102024/7060102024	7030302024	200µl	200µl	0.4%	0.8µl	0.2%	0.4µl
7010102025	7030302025	250µl	250µl	0.4%	1.0µl	0.2%	0.5µl
7010102026/7060102026	7030302026	500µl	500µl	0.3%	1.5µl	0.2%	1.0µl
7010102027/7060102027	7030302027	1000µl	1000µl	0.3%	3.0µl	0.2%	2.0µl
7010102028	7030302028	2000µl	2000µl	0.3%	6.0µl	0.15%	3.0µl
7010102029	7030302029	5000µl	5000µl	0.3%	15µl	0.15%	7.5µl

Single-channel Adjustable Volume Pipettes								
TopPette/Qpette Series Cat.No.	MicroPette Plus Series Cat.No.	Volume Range	Increment	Test Volume(µl)	Maximуме Permissible Systematic Error		Maximуме Permissible Random Error	
7010101001 7060101001	7010301001	0.1-2.5µl	0.05µl	2.5	2.50%	0.0625µl	2.00%	0.05µl
				1.25	3.00%	0.0375µl	3.00%	0.0375µl
				0.25	12.00%	0.03µl	6.00%	0.015µl
7010101004 7060101004	7010301004	0.5-10µl	0.1µl	10	1.00%	0.1µl	0.80%	0.08µl
				5	1.50%	0.075µl	1.50%	0.075µl
				1	2.50%	0.025µl	1.50%	0.015µl
7010101005 7060101005	7010301005	2-20µl	0.5µl	20	0.90%	0.18µl	0.40%	0.08µl
				10	1.20%	0.12µl	1.00%	0.1µl
				2	3.00%	0.06µl	2.00%	0.04µl
7010101006 7060101006	7010301006	5-50µl	0.5µl	50	0.60%	0.3µl	0.30%	0.15µl
				25	0.90%	0.225µl	0.60%	0.15µl
				5	2.00%	0.1µl	2.00%	0.1µl
7010101008 7060101008	7010301008	10-100µl	1µl	100	0.80%	0.8µl	0.15%	0.15µl
				50	1.00%	0.5µl	0.40%	0.2µl
				10	3.00%	0.3µl	1.50%	0.15µl
7010101009 7060101009	7010301009	20-200µl	1µl	200	0.60%	1.2µl	0.15%	0.3µl
				100	0.80%	0.8µl	0.30%	0.3µl
				20	3.00%	0.6µl	1.00%	0.2µl
7010101011	7010301011	50-200µl	1µl	200	0.60%	1.2µl	0.15%	0.3µl
				100	0.80%	0.8µl	0.30%	0.3µl
				50	1.00%	0.5µl	0.40%	0.2µl
7010101014 7060101014	7010301014	100-1000µl	5µl	1000	0.60%	6µl	0.20%	2µl
				500	0.70%	3.5µl	0.25%	1.25µl
				100	2.00%	2µl	0.70%	0.7µl
7010101016	7010301016	200-1000µl	5µl	1000	0.60%	6µl	0.20%	2µl
				500	0.70%	3.5µl	0.25%	1.25µl
				200	0.90%	1.8µl	0.30%	0.6µl
7010101045 7060101045	7041301245	0.5-5ml	50µl	5000	0.50%	25µl	0.15%	7.5µl
				2500	0.60%	15µl	0.30%	7.5µl
				1000	0.70%	7µl	0.30%	3µl
7010101044 7060101044	7041301244	1-10ml	0.1ml	10ml	0.60%	60µl	0.20%	20µl
				5ml	1.20%	60µl	0.30%	15µl
				2ml	3.00%	60µl	0.60%	12µl

Note: 1~10ml is not available for micropette plus autoclaveable pipettes.

Single Channel Fixed Pipette



Introduction:

Manual fixed pipette is a measuring tool that moves the liquid from the original container to another container within a certain range. The unit is microliter (µl). It is characterized by precision and convenience, and is widely used in biological, chemical and other fields. Often used in the laboratory for the removal of a small amount or trace liquid, different specifications, different specifications of the pipette gun supporting the use of different sizes of the gun head.

Features:

- * In line with ergonomic design, comfortable and convenient operation.
- * High precision, precise liquid separation, according to EN/SO8655 standard calibration.
- * Digital window, easy to set the range, at a glance.
- * The low part can be autoclaved without compromising performance and comfort.
- * Calibration tools and silicone grease are included for easy servicing and calibration.
- * The internal air tightness of the product is good, stable and accurate without leakage.
- * Special suction connector design, easy to observe the sealing condition.

Technical Parameters:

Cat.No.	Volume	Measured volume	Maximum Permissible Systematic Error		Maximum Permissible Random Error	
		µl	±%	±µl	±%	±µl
10102001	5µl	5	0.4	0.02	0.4	0.02
10102002	10µl	10	0.5	0.05	1.1	0.11
10102003	20µl	20	0.5	0.1	0.4	0.08
10102004	100µl	100	0.3	0.3	0.9	0.9
10102005	200µl	200	0.3	0.6	0.1	0.2
10102006	1000µl	1000	0.3	3	0.1	1

Single Channel Fixed Pipette



Features:

- * An ergonomic design, convenience of use and simplicity of operation.
- * Ease of calibration and maintenance.
- * Availability for autoclave of part of the device.
- * Detailed instructions in Chinese and English.
- * A hook, disassembly tool and consumable replacement parts.
- * An ergonomic handle hook design for easy grip in the palm.
- * A clever design for the tip eject button.
- * A clear reading window.
- * Availability for autoclave of the tip and the pusher, also detachable to facilitate cleaning and maintenance.
- * A tip cone made of durable chemical materials, with excellent chemical corrosion resistance.

Technical Parameters:

Cat.No.	Model	Volume Range	Package	Gross Weight(kg)	Package Size(mm)
20002000	BK-FP0.5	0.5µl	50pcs/carton	9.5	490*400*290
20002005	BK-FP1	1µl	50pcs/carton	9.5	490*400*290
20002010	BK-FP5	5µl	50pcs/carton	9.5	490*400*290
20002020	BK-FP10	10µl	50pcs/carton	9.5	490*400*290
20002030	BK-FP20	20µl	50pcs/carton	9.5	490*400*290
20002040	BK-FP25	25µl	50pcs/carton	9.75	490*400*290
20002050	BK-FP50	50µl	50pcs/carton	9.75	490*400*290
20002060	BK-FP100	100µl	50pcs/carton	9.75	490*400*290
20002070	BK-FP200	200µl	50pcs/carton	9.75	490*400*290
20002080	BK-FP250	250µl	50pcs/carton	10.2	490*400*290
20002090	BK-FP500	500µl	50pcs/carton	10.2	490*400*290
20002100	BK-FP1K	1000µl	50pcs/carton	10.2	490*400*290
20002110	BK-FP2K	2000µl	50pcs/carton	10.3	490*400*290
20002120	BK-FP2.5K	2500µl	50pcs/carton	10.3	490*400*290
20002130	BK-FP5K	5000µl	50pcs/carton	10.3	490*400*290
20002140	BK-FP10K	10ml	50pcs/carton	10.3	490*400*290

8-Channel Pipette



Application:

The 8-channel pipette is a measuring tool that moves liquid from the original container to another container within a certain measuring range. The unit is microliter(ul). It is characterized by precision and convenience, and is widely used in biological and chemical fields. it is often used for the removal of a small amount or trace liquid in the laboratory. Different specifications of pipettes are matched with different sizes of pipette tips.

Application:

School laboratory, chemical synthesis, pharmaceutical research and development center, pharmaceutical research and development company.

Features:

- * Precise liquid separation, calibrated according to EN/ISO8655 standard.
- * Digital window, easy to set the range, at a glance.
- * Ergonomic, light and convenient, comfortable grip
- * Can be autoclave, and will not affect the performance and comfort.

Technical Parameters:

Cat.No.	Volume Range	Increment	Test Volume(µl)	Maximum Permissible Systematic Error		Maximum Permissible Random Error	
10108001	0.5-10µl 8-channel	0.1µl	1	1.0%	0.01µl	1.8%	0.018µl
			5	0.4%	0.02µl	0.4%	0.02µl
			10	0.5%	0.05µl	1.1%	0.11µl
10108002	5-50µl 8-channel	0.5µl	5	2%	0.1µl	1.1%	0.055µl
			25	1.3%	0.325µl	0.7%	0.175µl
			50	0.6%	0.3µl	1.5%	0.75µl
10108003	50-300µl 8-channel	5µl	50	0.2%	0.1µl	0.8%	0.4µl
			150	0.3%	0.3µl	0.2%	0.2µl
			300	0.3%	0.6µl	0.1%	0.2µl

TopPette-Mechanical 8-Channel Pipette



Introduction:

The 8-channel pipette is a measuring tool that moves liquid from the original container to another container within a certain measuring range. The unit is microliter(µl). It is characterized by precision and convenience, and is widely used in biological and chemical fields. It is often used for the removal of a small amount or trace liquid in the laboratory. Different specifications of pipettes are matched with different sizes of pipette tips.

Application:

School laboratory, chemical synthesis, pharmaceutical research and development center, pharmaceutical research and development company.

Features:

- * Precise liquid separation, calibrated according to EN/ISO8655 standard.
- * Digital window, easy to set the range, at a glance.
- * Ergonomic, light and convenient, comfortable grip.
- * Can be autoclave, and will not affect the performance and comfort.

Technical Parameters:

Cat.No.	Volume Range	Increment	Test Volume (µl)	Maximum Permissible Systematic Error	Maximum Permissible Random Error
7030103204	0.5-10µl 8-channel	0.1µl	1	4.0%(0.04µl)	4.0%(0.04µl)
			5	2.5%(0.125µl)	2.5%(0.125µl)
			10	1.5%(0.15µl)	1.5%(0.15µl)
7030103206	5-50µl 8-channel	0.5µl	5	3%(0.15µl)	2.0%(0.1µl)
			25	1.5%(0.375µl)	1.0%(0.25µl)
			50	1.0%(0.5µl)	0.5%(0.25µl)
7030103208	10-100µl 8-channel	1µl	10	3.0%(0.3µl)	2.0%(0.2µl)
			50	1.0%(0.5µl)	0.8%(0.4µl)
			100	0.8%(0.8µl)	0.3%(0.3µl)
7030103212	50-300µl 8-channel	5µl	50	1.5%(0.75µl)	0.8%(0.4µl)
			150	1.0%(1.5µl)	0.5%(0.75µl)
			300	0.7%(2.1µl)	0.25%(0.75µl)

TopPette-Mechanical Pipettes



Features for Multi-channel TopPette:

- * 8 and 12 channel pipettes are available for standard 96-well plate. * Universal pipette tips can be used.
- * Dispensing head rotates ensures optimum pipetting convenience. * Compound material tip cone design allows visual seal verification.
- * Individual piston/tip cone assemblies allow easy repair and maintenance.

MicroPette Plus Autoclavable Pipette



Fully Autoclavable:

The MicroPette plus pipettes can be fully autoclaved at 121°C, 1 atm for less than 20 mins. The pipettes can be autoclaved without special preparations. After autoclaving the pipette must be cooled down and dried over 12 hours.

Features for multi-channel MicroPette plus:

- * 8 and 12 channel pipettes are available for standard 96-well plate
- * Individual piston and tip cone assemblies allow easy repair and maintenance
- * Compound material tip cone design allows visual seal verification
- * Universal pipette tips can be used
- * Dispensing head rotates for optimum pipetting convenience

Note: It is recommended to check the performance of the pipette after each autoclaving. It is also recommended to grease the piston and seal of the pipette after each 10 autoclaving.

8-channel Adjustable Volume Pipettes							
MicroPette Plus Series Cat.No.	Volume Range	Increment	Test Volume	Maximume Permissible Systematic Error		Maximume Permissible Random Error	
7042303004	0.5-10µl	0.1µl	10µl	1.50%	0.15µl	1.50%	0.15µl
			5µl	2.50%	0.125µl	2.50%	0.125µl
			1µl	4.00%	0.04µl	4.00%	0.04µl
7042303006	5-50µl	0.5µl	50µl	1.00%	0.5µl	0.50%	0.25µl
			25µl	1.50%	0.375µl	1.00%	0.25µl
			5µl	3.00%	0.15µl	2.00%	0.1µl
7042303008	10-100µl	1µl	100µl	0.8%	0.8µl	0.3%	0.3µl
			50µl	1%	0.5µl	0.8%	0.4µl
			10µl	3%	0.3µl	2%	0.2µl
7042303012	50-300µl	5µl	300µl	0.70%	2.1µl	0.25%	0.75µl
			150µl	1.00%	1.5µl	0.50%	0.75µl
			50µl	1.50%	0.75µl	0.80%	0.4µl
7042303014	100-1000µl	10µl	1000µl	1%	10µl	0.3%	3µl
			500µl	2%	10µl	0.5%	2.5µl
			100µl	5%	5µl	1%	1µl

12-channel Adjustable Volume Pipettes							
TopPette Series Cat.No.	MicroPette Plus Series Cat.No.	Volume Range	Increment	Test Volume	Maximume Permissible Systematic Error		Maximume Permissible Random Error
7030104204	7042304004	0.5-10µl	0.1µl	10µl	1.50%	0.15µl	1.50% 0.15µl
				5µl	2.50%	0.125µl	2.50% 0.125µl
				1µl	4.00%	0.04µl	4.00% 0.04µl
7030104206	7042304006	5-50µl	0.5µl	50µl	1.00%	0.5µl	0.50% 0.25µl
				25µl	1.50%	0.375µl	1.00% 0.25µl
				5µl	3.00%	0.15µl	2.00% 0.1µl
7030104208	7042304008	10-100µl	1µl	100µl	0.8%	0.8µl	0.3% 0.3µl
				50µl	1%	0.5µl	0.8% 0.4µl
				10µl	3%	0.3µl	2% 0.2µl
7030104212	7042304012	50-300µl	5µl	300µl	0.70%	2.1µl	0.25% 0.75µl
				150µl	1.00%	1.5µl	0.50% 0.75µl
				50µl	1.50%	0.75µl	0.80% 0.4µl

Multi-channel Pipette



Features:

- * 8 channel pipettes are available for standard 96-well plate.
- * Dispensing head rotates for optimum pipetting convenience.
- * Individual piston and tip cone assemblies allow easy repair and maintenance.
- * Compound material tip cone design allows visual seal verification.
- * Can be used with universal style pipette tips.

Technical Parameters:

Cat.No.	Model	Channel	Volume Range	Increment	Test Volume	Precision	Package	Gross Weight(kg)	Package Size (mm)
20001110	BK-8P10	8	0.5-10μl	0.1μl	10	1.50%	50pcs/carton	15	560*360*280
					5	2.50%			
					1	4.00%			
20001115	BK-8P20	8	2-20μl	0.5μl	20	0.40%	50pcs/carton	16	560*360*280
					10	1.00%			
					2	2.00%			
20001120	BK-8P50	8	5-50μl	0.5μl	50	0.15%	50pcs/carton	16	560*360*280
					25	0.40%			
					5	1.50%			
20001121	BK-8P100	8	10-100μl	1μl	100	0.15%	50pcs/carton	16	560*360*280
					50	0.40%			
					10	1.50%			
20001122	BK-8P200	8	20-200μl	1μl	200	0.15%	50pcs/carton	16	560*360*280
					100	0.30%			
					20	1.00%			
20001129	BK-8P300	8	30-300μl	5μl	300	0.25%	50pcs/carton	16	560*360*280
					150	0.50%			
					30	0.80%			
20001210	BK-12P10	12	0.5-10μl	0.1μl	10	1.50%	50pcs/carton	16	560*360*280
					5	2.50%			
					1	4.00%			
20001215	BK-12P20	12	2-20μl	0.5μl	20	0.40%	50pcs/carton	16	560*360*280
					10	1.00%			
					2	2.00%			
20001220	BK-12P50	12	5-50μl	0.5μl	50	0.15%	50pcs/carton	17	560*360*280
					25	0.40%			
					5	1.50%			
20001221	BK-12P100	12	10-100μl	1μl	100	0.15%	50pcs/carton	17	560*360*280
					50	0.40%			
					10	1.50%			
20001222	BK-12P200	12	20-200μl	1μl	200	0.15%	50pcs/carton	17	560*360*280
					100	0.30%			
					20	1.00%			
20001229	BK-12P300	12	30-300μl	5μl	300	0.25%	50pcs/carton	18	560*360*280
					150	0.50%			
					30	0.80%			

Electronic Pipette

Features:

- * A motor drive digital control pipette with multifunction Pipetting, Mixing, Stepper and Dilution.
- * 2 buttons handle all operation and setting.
- * Light weight, ergonomic design, small body dimension for easy handling that guarantees fatigue free pipetting.
- * High accuracy, high performance stepper motor assures precision and repeatability and eliminates manual pipetting errors.
- * A wide range of pipetting modules for selection.
- * Adjustable speeds for aspiration and dispensing.
- * Li-ion battery and two charging mode enable longer operation time.
- * Self calibration – By link it to a PC and a balance with USB connector, user can calibrate pipette by himself. No need to send it to the third party for calibration.



Technical Parameters:

Cat No.	Volume Range	Increment	Test Volume	Inaccuracy		Imprecision	
			μL	μL	%	s.d.*μL	CV*%
7016201001	0.5-10μL	0.01μL	10	±0.10	±1.0	0.05	0.5
			1	±0.035	±3.5	0.03	3.0
7016201002	5-50μL	0.1μL	50	±0.40	±0.8	0.15	0.3
			5	±0.15	±3.0	0.125	2.5
7016201003	30-300μL	1μL	300	±1.8	±0.6	0.6	0.2
			30	±0.9	±3.0	0.21	0.7
7016201004	100-1000μL	5μL	1000	±6.0	±0.6	2.0	0.2
			100	±3.0	±3.0	0.6	0.6

*s.d. = Standard Deviation *CV = Coefficient of Variation

E-Pipette

Features:

- * High accuracy, high performance stepper motor ensures accuracy and repeatability, eliminating manual pipetting errors.
- * 2 LCM Display, Covered 0.1-10000ul volume range.
- * A motor driven digital control pipette with multifunction.
- * A special locking induction design,2 buttons handle all operational settings.
- * Light weight, ergonomic design, small body dimension for easy handling that guarantees fatigue free pipetting.
- * Pipetting, Mixing, Stepper and Dilution.
- * Adjustable speeds for aspiration and dispensing.
- * Li-ion battery and dual charging modes enable longer operation time.



Technical Parameters:

Cat.No.	Model	Volume Range	Increment	Test Volume	Accuracy	Precision
90201010	BK-EP10	0.1-10μl	0.01μl	10μl	±0.90%	≤0.4%
				5μl	±1.00%	≤0.7%
				1μl	±2.50%	≤1.5%
90201020	BK-EP120	5-120μl	0.10μl	120μl	±0.40%	≤0.15%
				60μl	±0.60%	≤0.20%
				12μl	±2.00%	≤1.00%
90201030	BK-EP300	10-300μl	0.20μl	300μl	±0.40%	≤0.4%
				150μl	±0.60%	≤0.7%
				30μl	±1.50%	≤0.80%
90201040	BK-EP1K	50-1000μl	1.00μl	1000μl	±0.40%	≤0.15%
				500μl	±0.60%	≤0.20%
				100μl	±1.50%	≤0.50%
90201050	BK-EP5K	100-5000μl	5.00μl	5000μl	±0.50%	≤0.15%
				2500μl	±0.80%	≤0.20%
				500μl	±1.00%	≤0.40%
90201060	BK-EP10K	500-10000μl	10.00μl	10000μl	±0.60%	≤0.20%
				5000μl	±1.20%	≤0.30%
				1000μl	±3.00%	≤0.60%

Order Details:

Model	Volume Range	Qty	Unit	Package	Gross Weight(kg)	Package Size(mm)
BK-EP10	0.1-10μl	1	pcs	50pcs/carton	25	475*390*280
BK-EP120	5-120μl	1	pcs	50pcs/carton	25	475*390*280
BK-EP300	10-300μl	1	pcs	50pcs/carton	25	475*390*280
BK-EP1K	50-1000μl	1	pcs	50pcs/carton	25	475*390*280
BK-EP5K	100-5000μl	1	pcs	50pcs/carton	26	475*390*280
BK-EP10K	500-10000μl	1	pcs	50pcs/carton	27	475*390*280

Levo Plus Pipette Filler

Features:

- * Volume range of 0.1-100ml.
- * One-handed operation.
- * Light weight, ergonomic design.
- * Efficient lithium-ion battery offers long runtime on each charge.
- * Low battery alarm.
- * Powerful motor fills a 25ml pipette within 5 seconds.
- * Integral and replaceable 0.45um filter.
- * LCD screen displays battery status and pipetting speed.
- * Intuitive and convenient speed with 6 levels.



7062110200

7061100102

Technical Parameters:

Cat. No.	7062110200	7061100102
Aspirate Speeds	25ml<5s(6 shift)	
Dispense Speed	Motor/Gravity	
Battery	Replaceable lithium battery	
Battery Working Time	12 hours of intermittence use	
Charging Time	4~5 hours	
Pipette	Glass or Plastic Pipette(0.1~100ml), Pasteur Pipettes	
Filter	0.45µm Hydrophobic	
Power Supply	AC100~240V, 50/60Hz	
Net Weight	208g	
Package Size(W*D*H)	255*240*95mm	
Gross Weight	0.66kg	

Ordering Information:

Cat. No.	Descriptions
7062110200	Levo Plus with AC adapter, spare 0.45µm filter and wall stand, Euro plug
	Levo Plus with AC adapter, spare 0.45µm filter and wall stand, North-America plug
	Levo Plus with AC adapter, spare 0.45µm filter and wall stand, UK plug
Standard Accessories	
17500166	Levo Plus Lithium battery
17000762	Filter 0.45µm, 1pc/pk

Pipette Filler



Features:

- * Pipette filler has an excellent feature and ergonomic design, suitable for almost all commonly used glass or plastic pipettes.
- * Enables single-handed operation with minimum effort.
- * Compatible with most of the plastic and glass pipettes from 0.1-100mL.
- * Easily adjustable speed control.
- * Stable and reliable performance, elegant appearance.
- * 0.45um replaceable hydrophobic filter.
- * High capacity Li-ion battery enable long operation time.

Technical Parameters:


Model	BK-PF100
Cat.No.	90201001
Aspiration Speed	25ml<7s
Dispensing Speed	Motor/Gravity
Battery	Lithium-ion
Battery Service Life	More than 8 Hours Intermittence Use
Charging Time	2-3 Hours
Pipette Types	Glass or Plastic Pipette(0.1-100ml), Pasteur Pipettes
Filler	0.45µm Hydrophobic
Net Weight	0.2kg
Gross Weight	0.75kg
Package Size(W*D*H)	190*250*110mm

Dispenser

DispensMate-E Bottle-Top Dispenser



Floating piston design:
Smooth feel for liquid
suction and discharge.



Precise scale:
Digital window, gear
slot design for more
accurate liquid dispensing.



Scale adjustment knob:
The rotating button
adjusts the range,
making operation



Safety shut-off valve:
Switch design to prevent
accidental liquid dispensing,
liquid waste, and leakage.



Includes 5 types of bottle
neck adapters, suitable
for reagent bottles of
different sizes in the
laboratory.

Features:

Excellent chemical resistance. The five bottle neck adapters provided are: S40, 45/40mm; GL32, 45/32mm; GL38, 45/38mm; GL25, 32/25mm; GL28, 32/28mm. 4 models cover a capacity range of 1-60mL. Made of materials such as PTFE, FEP, PVC, and PP. Convenient design ensures easy and economical cleaning and maintenance of the dispenser. Maximum pressure resistance: 500mbar, maximum viscosity: 500mm²/s, maximum liquid temperature resistance: 40°C, maximum liquid density resistance: 2.2g/cm³.

Application:

The simple bottle-top dispenser is widely used for routine liquid dispensing in fields such as chemistry, biology, pharmaceuticals, food, environmental monitoring, and scientific research education.

Technical Parameters:

Cat. No.	Volume Range(ml)	Graduation(ml)	Test Volume(ml)	Systematic Error		Random Error	
				±%	±μl	±%	±μl
4080100000	0.5~2.5	0.05	0.5	5	25	1	5
			1.25	1	12.5	0.2	2.5
			2.5	0.5	12.5	0.1	2.5
4080100001	1~5	0.1	1	5	50	1	10
			2.5	1	25	0.2	5
			5	0.5	25	0.1	5
4080100002	2~10	0.2	2	5	100	1	20
			5	1	50	0.2	10
			10	0.5	50	0.1	10
4080100003	5~30	0.5	5	5	250	1	50
			15	1	150	0.2	30
			30	0.5	150	0.1	30
4080100004	10~60	1	10	5	500	1	100
			30	1	300	0.2	60
			60	0.5	300	0.1	60

Ordering Information:

Cat. No.	Specifications
Standard Accessories	
17000069	S40, Adapter, 45/40mm
17000817	GL32, Adapter, 45/32mm
17400132	GL38, Adapter, 45/38mm
17400133	GL25, Adapter, 32/25mm
17400134	GL28, Adapter, 32/28mm
17400021	Filling tube(m)
17100073	Discharge tube(m)
Optional Accessories	
17400037	Reagent bottle(Brown, 1L)

DispensMate Bottle-Top Dispenser

Features:

- * Excellent chemical resistance
- * Fully autoclavable at 121°C
- * Easy to clean and maintain
- * Made of PTFE、FEP、BSG、PP
- * Four ranges of bottle-top dispenser cover a volume range from 0.5ml to 50ml
- * The optional flexible discharge tube with safety handle permits fast and precise dispensing
- * Vapor pressure Max. 500mbar, viscosity max. 500mm2/s, temperature max. 40°C, density max. 2.2g/cm3
- * DispensMate plus is supplied with S40, GL32, GL38, GL25, GL28 sized adapters



Technical Parameters:

Volume Range	Graduation	A≤±		CV≤	
0.5-5ml	0.1ml	0.5%	25μl	0.1%	5μl
1.0-10ml	0.2ml	0.5%	50μl	0.1%	10μl
2.5-25ml	0.5ml	0.5%	125μl	0.1%	25μl
5.0-50ml	1.0ml	0.5%	250μl	0.1%	50μl

A = Accuracy; CV = Coefficient of variation.

Ordering Information:

Cat. No.	Volume Range	Cat. No.	Volume Range
Standard Accessories			
7032100101	0.5-5ml	17000069	S40, Adapter, 45/40mm
7032100102	1-10ml	17000817	GL32, Adapter, 45/32mm
7032100103	2.5-25ml	17400132	GL38, Adapter, 45/38mm
7032200104	5-50ml	17400133	GL25, Adapter, 32/25mm
		17400134	GL28, Adapter, 32/28mm
		17400021	Filling tube (m)
		17100073	Discharge tube (m)
		Optional Accessories	
		17400037	Reagent Bottle (Brown, 1L)

Electronic Bottle-Top Dispenser



Features:

- * Motor operation minimizes the grip force.
- * Electronic control decreases the repetitive strain injury.
- * Remote control panel prevents manual disturbance during operation.
- * Two dispensing modes.
- * Dispenser.
- * Stepper function.

Technical Parameters:

Model	DFlow
Cat No.	7012300001
Volume Range	0.01~99.99ml, Max piston lift is 10ml, resolution is 10μl
Volume Accuracy	R=0.2% CV=0.07%
Operating Temperature Range	10°C~30°C
Quality Control	DIN EN ISO 8655
Control Type	External control, including the stirrer and the burette program

Bottle-Top Dispenser



Features:

- * Excellent chemical resistance.
- * Fully autoclavable at 121°C.
- * Adjustable control knob makes setting the volume easy.
- * Made of PTFE, FEP, BSG,PP.
- * Vapor pressure Max. 500mbar, viscositymax. 500mm²/s, temperature max.40°C, density max.2.2g/cm².

Technical Parameters:

Cat.No.	Volume Range	Subdivision	Accuracy	Precision	Package	Gross Weight(kg)	Package Size(mm)
30013010	1ml	/	±2.00%, 20µl	1.00%, 10µl	20pcs/carton	14	595*430*275mm
30013020	0.5-5ml	0.1ml	±0.50%, 25µl	0.10%, 5µl	20pcs/carton	14	595*430*275mm
30013030	1-10ml	0.2ml	±0.50%, 50µl	0.10%, 10µl	20pcs/carton	14	595*430*275mm
30013040	2.5-25ml	0.5ml	±0.50%, 125µl	0.10%, 25µl	20pcs/carton	14	595*430*275mm
30013050	5-50ml	1.0ml	±0.50%, 250µl	0.10%, 50µl	20pcs/carton	14	595*430*275mm

Accesories:

Accessory Code	Description	Accessory Code	Description
30013110	Adapt 45/40mm	30013150	Adapt 32/28mm
30013120	Adapt 45/32mm	30013160	Bottle(Brown, 1L)
30013130	Adapt 45/38mm	30013170	Filling tube(m)
30013140	Adapt 32/25mm	30013180	Discharge tube(m)

Automatic Micro Liquid Dispenser



Introduction:

The Automatic Micro Liquid Dispenser is equipped with a high-precision peristaltic pump and a robotic arm, which can quickly, accurately and consistently complete the automatic liquid dispensing operation, liberate the hands of the experimenter, and avoid mistakes while improving efficiency. The liquid dispensing accuracy of the product meets the minimum liquid dispensing volume as low as 5µl, and the filling time of 100µl in a 96-well plate is 10s.

Features:

- * Fast: 96-well plate 100µl adding time 10s
- * Accurate: 96-well plate 100µl liquid addition error ± 1.5%
- * Efficient: 10 times the efficiency of manual operation
- * Intuitive: Graphical operation interface, one-key liquid addition

Technical Parameters:

Model	AMS-01
Dispensing Volume	5-9999µl(1µl increment)
Suitable Plate	8~96 well plate
Dispensing Way	Whole plate or any line, the liquid volume of the specified line can be set
Dispensing Speed	High-middle-low, can be adjustable
Dispensing Pipe	8-channel
Waste Liquid Handling	Movable water liquid slot
Auxiliary Function	Shake, rinse,suck, pipe wash
Display	7 inch touch display
Dispensing Precision	20µl≤5%; 100µl≤1.5%(96-well plate)
Dispensing Accuracy	20µl±1.5%; 100µl±1%(96-well plate)
Power Supply	AC220/110V, 50/60Hz
External Size	465*275*280mm
Net Weight	10kg
Packing Size	550*370*470mm
Gross Weight	27kg

StepMate Stepper

Optimized for smooth dispensing of even the smallest volumes

Five easy-to-select settings control dispensing volume

By pushing the slide upwards, the syringe is filled up

The stop lever secures the syringe

How to select dispensing volume

Find the required dispensing volume in the table
 Use the adjusting wheel to set the required volume
 Select and insert a suitable tip
 Follow the maximum dispensing steps

Tip volume		Dispensing Volume				
Tips	Set	1	2	3	4	5
0.50ml	10μl	20μl	30μl	40μl	50μl	
1.25ml	25μl	50μl	75μl	100μl	125μl	
2.50ml	50μl	100μl	150μl	200μl	250μl	
5.00ml	100μl	200μl	300μl	400μl	500μl	
12.50ml	250μl	500μl	750μl	1000μl	1250μl	
25.00ml	500μl	1000μl	1500μl	2000μl	2500μl	
50.00ml	1000μl	2000μl	3000μl	4000μl	5000μl	
Steps	48	23	15	11	8	

Steps

Stepper tips are particularly suitable for dispensing of fluids with high viscosity, high vapor pressure etc.

Tips are made from high-quality materials(Cylinder: PP, Piston: PE-HD) without soft lubricants or other additives.

Introduction:

Based on the principle of positive displacement, StepMate Stepper is designed for trouble-free and reliable dispensing of liquids, especially for high viscosity, high density and high vapor pressure. The 48-step dispensing allows for enhanced accuracy and usability.

Features:

- * Light and ergonomic solution provides easy usability
- * Single-handed operation
- * Volume range from 10μL to 5mL
- * Up to 48 dispensing steps
- * Maintenance free
- * Equipped with durable tip
- * insertion lever
- * Fits seven sizes of disposable polypropylene syringes from 0.5mL to 50mL

Technical Parameters:

Note:

- 1.The first and last dispensing liquid should be discarded for precision.
- 2.Cat No. 7011000000

Dial setting	1	2	3	4	5
Number of steps	48	23	15	11	8

Cat. No.	Syringe Volume (mL)	Sample Volume (μL)					A %	P %	Description
17900032	0.50	10	20	30	40	50	± 0.8	≤ 0.7	0.5mL, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900033	1.25	25	50	75	100	125	± 0.8	≤ 0.5	1.25mL, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900034	2.50	50	100	150	200	250	± 0.8	≤ 0.4	2.5mL, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900035	5.00	100	200	300	400	500	± 0.4	≤ 0.3	5mL, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900036	12.50	250	500	750	1000	1250	± 0.3	≤ 0.3	12.5ml, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900037	25.00	500	1000	1500	2000	2500	± 0.2	≤ 0.3	25mL, piston PE-HD, cylinder PP, 1 packing, 2pcs/packing with 1 pc adapter
17900038	50.00	1000	2000	3000	4000	5000	± 0.2	≤ 0.2	50mL, piston PE-HD, cylinder PP, 1 packing, 2pcs/packing with 1 pc adapter

Dispensing Pipette



Introduction:

It features a light weight design with ease of use. One suction allows for continuously dispensing 45 times. It has strong universality and is able to adapt to 7 types of dispensing pipette tip. The dispensing range is 10-5000μl and for each type of tip, five dispensing volumes are available for selection. Only attach a suitable tip and set the dispensing volume required, and then enjoy the fun of fast dispensing. A unique ergonomic handle design brings comfort of use. The light weight makes it suitable for one-hand operation. Dispensing Pipette employs the external piston replacement principle and is especially suitable for dispensing corrosive and sticky liquids.

The Parameters of Dispensing Pipette:

Cat.No.	Product Code	Description	Volume Range	Qty	Unit	Package	Gross Weight(kg)	Package Size(W*D*H)
50001005	BK-DP5000	Dispensing Pipette	10-5000μl	1	pcs	50pcs/carton	10	490*400*290mm

Wheel Position	1	2	3	4	5
Number of Strokes	44	22	15	11	9
Pick up Volume	Delivery Volume(μl)				
0.5ml	10	20	30	40	50
1.25ml	25	50	75	100	125
2.5ml	50	100	150	200	250
5.0ml	100	200	300	400	500
12.5ml	250	500	750	1000	1250
25ml	500	1000	1500	2000	2500
50ml	1000	2000	3000	4000	5000

The Parameters of Tips:

Cat.No.	Tips Code	Volume	Test Volume	Accuracy		Precision	
9404170	BK-DPT500	0.5ml	50μl	±0.5μl	±1.0%	0.3μl	0.60%
			10μl	±0.1μl	±1.0%	0.1μl	1.00%
9404180	BK-DPT1250	1.25ml	125μl	±1.0μl	±0.8%	0.6μl	0.50%
			25μl	±0.2μl	±0.8%	0.2μl	0.80%
9404190	BK-DPT2500	2.5ml	250μl	±2.0μl	±0.8%	0.8μl	0.30%
			50μl	±0.4μl	±0.8%	0.4μl	0.70%
9404200	BK-DPT5K	5.0ml	500μl	±4.0μl	±0.8%	1.0μl	0.20%
			100μl	±0.8μl	±0.8%	0.5μl	0.50%
9404210	BK-DPT12500	12.5ml	1250μl	±7.5μl	±0.6%	2.5μl	0.20%
			250μl	±1.5μl	±0.6%	1.0μl	0.40%
9404220	BK-DPT25K	25ml	2500μl	±12.5μl	±0.5%	7.5μl	0.30%
			500μl	±2.5μl	±0.5%	2.5μl	0.50%
9404230	BK-DPT50K	50ml	5000μl	±25.0μl	±0.5%	15.0μl	0.30%
			1000μl	±5.0μl	±0.5%	5.0μl	0.50%

Order Details:

Cat.No.	Product Code	Description	Volume	Qty	Unit	Package	Gross Weight(kg)	Package Size(W*D*H)
9404170	BK-DPT500	Tips for dispensing Pipette	0.5ml	1	pcs	100pcs/box	0.25	220*135*115mm
9404180	BK-DPT1250	Tips for dispensing Pipette	1.25ml	1	pcs	100pcs/box	0.25	220*135*115mm
9404190	BK-DPT2500	Tips for dispensing Pipette	2.5ml	1	pcs	100pcs/box	0.25	220*135*115mm
9404200	BK-DPT5K	Tips for dispensing Pipette	5.0ml	1	pcs	50pcs/box	0.25	220*135*115mm
9404210	BK-DPT12500	Tips for dispensing Pipette	12.5ml	1	pcs	50pcs/box	0.25	220*135*115mm
9404220	BK-DPT25K	Tips for dispensing Pipette	25ml	1	pcs	20pcs/box	0.25	220*135*115mm
9404230	BK-DPT50K	Tips for dispensing Pipette	50ml	1	pcs	10pcs/box	0.25	220*135*115mm

Pipette Stand

The round stand can be applied to the three major pipette series-TopPette, MicroPette and MicroPette Plus. It can stably and conveniently hang up to 6 single-channel and multi-channel pipettes at the same time.



The linear and round stands have been designed to fit perfectly of BIOBASE Pipette range, TopPette, MicroPette and MicroPette Plus Autoclavable Pipettes. The stands are convenient to hold up 6 pipettes both of single and multi-channel.

Ordering Information:

Cat. No	Descriptions
7030000084	Round stand holds up to 6 pipettes, fit of TopPette, MicroPette and MicroPette Plus
7030000085	Linear stand holds up to 6 pipettes, fit of TopPette, MicroPette and MicroPette Plus

Pipette Stand



Introduction:
 The round stand can be applied to the five major pipette series-TopPette, MicroPette, Micropette Pro, MicroPette Plus and Classic. It canstably and conveniently hang up to 6 single-channel andmulti-channel pipettes at the same time.

Technical Parameters:

Cat. No.	Model	Descriptions
2302M001	BK-PS001	Round stand holds up to 6 pipettes, fit of TopPette, MicroPette, Micropette Pro, MicroPette Plus and Classic.

Vacuum Aspiration Systems



Sensitive level sensor to prevent liquid overflow



Self-closing connectors to avoid escape of drops or aerosols from disconnected bottle



Stand for transferring the bottle securely and holding the hand operator

Introduction:

SafeVac is designed for laboratory waste recovery and separation of liquid and solid. It can be widely used in cell culture, DNA extraction, microplate waste removal, and any other liquid separation or recovery.


Features:

- * Vacuum power with adjustable aspiration rate to achieve up to 15mL/S
- * Sensitive level sensor to detect when the bottle is full preventing liquid overflow
- * Fully autoclavable all system components that contact liquid
- * Easy to disassemble and clean
- * Wide range of adapters fit on the hand operator for aspirating liquids from tubes, dishes, microplates, bottles, from single channel to 8-channel tip
- * Hydrophobic filter for avoiding air contamination or liquid overflow (this feature is in the catalogue but it is not on website)



Wide range of adapters fit well with tube, microplate and disk plate for various of tasks, all of which can be fully autoclaved (At 121°C 1 bar for 20 minutes. After autoclaving the equipment must be cooled down before use).

Adapter:

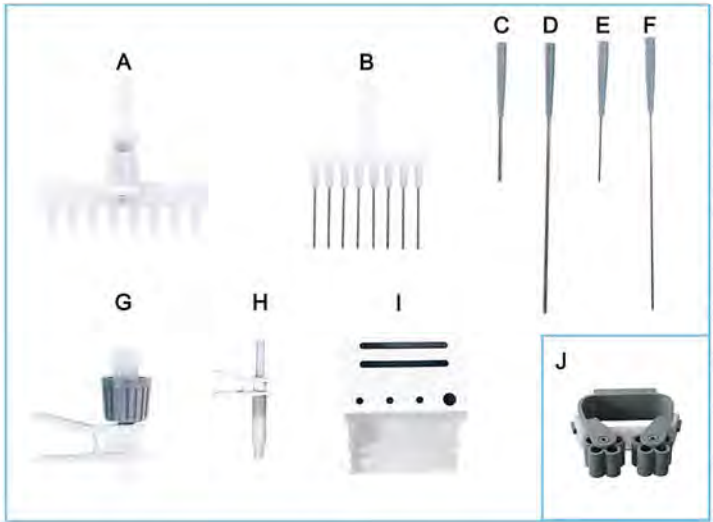

A	8-channel tip detrusion adapter 200µl tip
B	8-channel needle φ1.5mm
C	Single needle φ2.5mm, 40mm
D	Single needle φ2.5mm, 120mm
E	Single needle φ1.5mm, 40mm
F	Single needle φ1.5mm, 120mm
G	Tip detrusion adapter 200ul tip
H	Tip detrusion adapter 1ml tip
I	SAFEVAC handle bracket
J	Handle hoop (vacuum aspirator)

Technical Parameters:

Model	SAFEVAC
Cat No.	7035100000
Bottle Volume	4L
Vacuum Range	0~600mbar
Max. Flow	15L/min(air)
Max. Aspiration Speed	17mL/s(Liquid)
Autoclave Component	Tube, waste bottle, operation handle
Noise Level	≤55dB
Power Supply	100~240VAC, 50/60 Hz
Dimension(W*D*H)	180*240*450mm
Package Size(W*D*H)	570*420*220mm
Weight	3kg
Gross Weight	4.12kg

Bath / Circulator
Thermostatic Water Tank

Features:

- * All-round heating, rapid temperature rise, constant temperature operation, making the experiment accurate.
- * OLED display, temperature, time and other parameters displayed in real time.
- * Intelligent algorithm monitoring, water shortage stops heating when turned on, and the working time of the instrument can be freely set.
- * Lid of water bath can be adapted to various sizes of containers.



Technical Parameters:

Model	BK-W2	BK-W4	BK-W6
Capacity	5L	10L	20L
Chamber	Stainless steel		
Temp. Range	RT~100℃		
Temp. Fluctuation	±0.5℃		
Display	OLED		
Timing	Yes		
Consumption	600W	1000W	1500W
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional)		
Internal Size(W*D*H)	300*150*150mm	325*300*145mm	505*300*150mm
External Size(W*D*H)	385*280*275mm	385*420*275mm	570*420*275mm
Net Weight	6.15kg	7.85kg	11.3kg
Packing Size(W*D*H)	444*294*324mm	444*444*324mm	634*444*324mm
Gross Weight	7.8kg	10.5kg	13.6kg

Optional Tube Rack:

Model		BK-W2	BK-W4	BK-W6
Max Number	Φ13mm*40	1	3	5
	Φ14mm*40	1	3	5
	Φ16mm*40	1	3	4
	Φ17mm*40	1	3	4
	Φ19mm*30	1	3	5
	Φ19mm*40	1	2	4
	Φ19mm*50	1	2	3
	Φ21mm*12	1	4	7
	Φ21mm*40	1	2	4
	Φ21mm*50	/	2	3
	Φ23mm*12	1	4	7
	Φ23mm*40	/	2	2
	Φ25mm*40	/	/	2
	Φ27mm*12	1	3	6
	Φ27mm*40	/	/	2
	Φ30mm*12	1	3	5
	Φ30mm*24	/	2	2
	Φ30mm*40	/	/	1
	Φ32mm*12	1	3	5
	Φ32mm*24	/	/	2



Thermostatic Water Tank



Technical Parameters:

Model	WT-420	WT-24	WT-26	WT-28	WT-100
Type	1 row, 2 holes	2 rows, 4 holes	2 rows, 6 holes	2 rows, 8 holes	/
Capacity	15L	19L	30L	37L	100L
Temp. Range	RT+5~100℃(Normal atmosphere)				
Temp. Fluctuation	±0.5℃				≤±1℃
Temp. Uniformity	±0.5℃				≤±2℃
Temp. Precision	0.1℃				
Time Range	1~9999/continuous				
Consumption	1500W			1800W	2000W
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional)				
Lid Size	Φ37, Φ58, Φ79, Φ100, Φ120				/
Internal Size(W*D*H)	420*180*204mm	320*300*200mm	500*300*200mm	620*300*200mm	1330*450*170mm
External Size(W*D*H)	597*258*270mm	515*390*295mm	665*364*281mm	815*390*295mm	1501*523*288mm
Net Weight	8.8kg	11kg	15kg	16kg	40kg
Package Size(W*D*H)	650*310*330mm	570*445*360mm	710*405*330mm	870*445*360mm	1550*575*330mm
Gross Weight	11kg	13kg	18kg	19kg	45kg

Features:

- * Microprocessor control, LED display.
- * Timing function and over-temperature protection.
- * External material: Cold rolled steel with anti bacteria powder coating.
- * Inner material: Stainless steel inner chamber.



Technical Parameters:

Model	WT-42	WT-60
Capacity	13.6L	32L
Temp. Range	RT+5~100℃	
Temp. Fluctuation	≤±0.5℃	
Consumption	800W	1500W
Power Supply	AC110V/220V±10%, 50/60Hz	
Internal Size(W*D*H)	420*180*180mm	600*300*180mm
External Size(W*D*H)	580*250*270mm	760*370*270mm
Package Size(W*D*H)	640*310*310mm	820*440*310mm
Net Weight	10kg	15kg
Gross Weight	11kg	17kg

Thermostatic Water Bath



Introduction:
Thermostatic Water Bath is used for incubating samples in water at a constant temperature over a long period of time, as well as for drying, concentrating, distilling chemical reagents, drugs and biological agents. It is a necessary equipment for education and scientific research in biological, genetic, viral, aquatic, environmental protection, medicine, health, biochemical laboratories and analysis rooms.

- Features:**
- * PID temperature control, high temperature precision, with temperature deviation alarm.
 - * The water tank is made of 304 stainless steel by one time stamping process, which is resistant to high temperature, corrosion and rust.
 - * All-round heating, rapid heating, adjustable lid locking temperature.
 - * Adjustable ring cover to meet the needs of different sizes of experimental instruments (inside diameter:φ39mm, φ57mm, φ77mm, 97mm).

Technical Parameters:

Model	BK-S1	BK-S2	BK-S4	BK-S6	BK-S8
Capacity	3L	5L	10L	20L	26L
Temp. Range	RT+5°C~100°C		RT~100°C		
Temp. Precision	±0.5°C				
Temp. Fluctuation	≤±1°C		±0.5°C		
Temp. Uniformity	±0.5°C				
Timing Range	1~999min		0~99h59min		
Display	LED Display		OLED Display		
Anti-dry Protection	Standard				
Consumption	300W	600W	1000W	1500W	2000W
Power Supply	AC220V±10%, 50/60Hz(Standard); 110V, 50/60Hz(Optional)				
Internal Size(L*W*H)	160*160*120 mm	300*150*150mm	325*300*145mm	505*300*150mm	620*315*135mm
External Size(L*W*H)	200*215*200mm	383*236*259mm	383*381*264mm	568*376*259mm	650*365*264mm
Net Weight	2.3kg	4.5kg	6kg	8kg	10kg
Package Size(L*W*H)	260*265*260mm	444*294*324mm	444*444*324mm	634*444*324mm	710*400*285mm
Gross Weight	3kg	4.7kg	6.2kg	8.5kg	13kg

Optional Tube Rack:

Model		BK-S1	BK-S2	BK-S4	BK-S6	BK-S8
Max Number	Φ13mm*40	/	1	3	5	7
	Φ14mm*40	/	1	3	5	6
	Φ16mm*40	/	1	3	4	5
	Φ17mm*40	/	1	3	4	5
	Φ19mm*30	/	1	3	5	6
	Φ19mm*40	/	1	2	4	5
	Φ19mm*50	/	1	2	3	4
	Φ21mm*12	/	1	4	7	8
	Φ21mm*40	/	1	2	4	5
	Φ21mm*50	/	/	2	3	4
	Φ23mm*12	/	1	4	7	8
	Φ23mm*40	/	/	2	2	4
	Φ25mm*40	/	/	/	2	4
	Φ27mm*12	/	1	3	6	7
	Φ27mm*40	/	/	/	2	2
	Φ30mm*12	/	1	3	5	6
	Φ30mm*24	/	1	2	2	3
	Φ30mm*40	/	/	/	1	1
	Φ32mm*12	/	1	3	5	6
	Φ32mm*24	/	/	/	2	2



- Features:**
- * The shell adopts cold plate spraying, which improves the anti-corrosion ability of the whole machine.
 - * The water tank is made of 304 stainless steel, which is resistant to high temperature, corrosion and rust.
 - * Adjustable ring cover to meet the needs of different sizes of experimental instruments.
 - * Real-time temperature value display, accurate temperature control, countdown display.
 - * Hidden stretch drain, beautiful, convenient and durable.

Technical Parameters:

Model	BK-WB1	BK-WB2	BK-WB4	BK-WB6	BK-WB8
Capacity	3.5L	6.8L	13L	20L	26L
Temp. Range	RT+5~99.9°C				
Temp. Precision	0.1°C				
Temp. Fluctuation	±0.5°C				
Temp. Uniformity	±0.5°C				
Timing Range	1~999min				
Display	LED Display				
Anti-dry Protection	Standard				
Consumption	300W	600W	800W	1200W	1800W
Power Supply	Standard: AC220V, 50/60Hz; Optional: AC110V, 50/60Hz				
Internal Size(L*W*H)	160*160*140mm	305*160*140mm	305*305*140mm	470*305*140mm	620*305*140mm
External Size(L*W*H)	210*215*195mm	365*215*195mm	365*365*195mm	530*365*195mm	680*365*195mm
Net Weight	2.7kg	3kg	4.3kg	5.4kg	7kg
Packing Size(L*W*H)	210*215*195mm	395*215*240mm	395*395*240mm	560*395*240mm	705*410*265mm
Gross Weight	3.5kg	3.7kg	5.3kg	6.7kg	8.6kg

Optional Tube Rack:

Model		BK-WB1	BK-WB2	BK-WB4	BK-WB6	BK-WB8
Max Number	φ13mm*40	/	1	3	5	6
	φ14mm*40	/	1	3	5	5
	φ16mm*40	/	1	3	4	5
	φ17mm*40	/	1	2	4	5
	φ19mm*40	/	1	2	4	5
	φ21mm*40	/	1	2	3	5
	φ23mm*40	/	1	2	3	4
	φ25mm*40	/	/	/	2	2
	φ27mm*40	/	/	/	2	2
	φ30mm*40	/	/	/	1	1
	φ17mm*12	1	4	8	12	15
	φ19mm*12	1	3	5	10	12
	φ21mm*12	/	2	4	8	10
	φ23mm*12	/	2	4	8	10
	φ27mm*12	/	2	3	6	6
	φ30mm*12	/	1	3	5	6
	φ32mm*12	/	1	3	5	5

Thermostatic Water Bath



SY-1L4H

SY-1L6H

Features:

- * Stainless steel inner chamber and upper cover.
- * Adopt new design structure, which could avoid the leakage of steam.
- * PID microprocessor controller, LED display.
- * With universal fixture for SY-1L4H and SY-1L6H.

Technical Parameters:

Model	SY-1L4H	SY-1L6H
Capacity	12.6L	18.7L
Temp. Range	RT~100℃	
Temp. Precision	±1℃	
Temp. Fluctuation	±0.5℃	
Temp. Uniformity	±0.5℃	
Time Range	0-999min	
Display	LED Display	
Anti-dry Protection	Optional	
Consumption	1000W	1500W
Power Supply	AC110/220V±10%, 50/60Hz	
Internal Size(L*W*H)	610*160*130mm	900*160*130mm
External Size(L*W*H)	770*310*170mm	1100*310*170mm
Net Weight	10kg	13kg
Packing Size(L*W*H)	820*330*250mm	1150*330*250mm
Gross Weight	11kg	14.5kg

Super Thermostatic Water Bath



Introduction:

Super Thermostatic Water Bath , is made from imported corrosion-resistant plate with advanced manufacturing process, whose performance index accords with national standard requirements. It is of high precision to control temperature, strong anti corrosion, compact conformation, beautiful figure, saving energy sources, and long use life etc. It is applicable for precise constant temperature by direct or auxiliary heating in biology, physics, plants, chemicals, and environment protection etc.

Features:

- * Stainless steel inner chamber and upper cover.
- * High temperature resistance, corrosion resistance
- * External Material: cold rolled steel with powder coating.
- * PID Microprocessor controller, LED display.
- * The thermal equilibrium time is short, the temperature fluctuation is small, and the uniformity is good.

Technical Parameters:

Model	WB-501	WB-601
Capacity	20L	
Temp. Range	RT+5~100℃	
Temp. Precision	0.1℃	
Temp. Fluctuation	≤±0.1℃	
Temp. Uniformity	±0.1℃	
Timing Range	0~999min	
Display	LED	
Flow Rate of Pump	≥6L/min	
Consumption	800W	1000W
Power Supply	AC110/220V±10%, 50/60Hz	
Workroom Size(L*D*H)	280*240*180mm	
Internal Size(L*D*H)	400*280*180mm	
External Size(L*D*H)	470*360*390mm	
Net Weight	12kg	
Packing Size(L*D*H)	520*410*420mm	
Gross Weight	14kg	

Thermostatic Water Bath



Introduction:

It is a three-well thermostatic water bath with independent temperature control. The independent three-well thermostatic water bath is used in medical and health care, medical colleges, industrial and scientific research institutions for precision constant temperature, auxiliary heating, gene amplification and other experiments.

Feature:

- * Three-well independent temperature control, high efficiency.
- * Rapid heating, precise temperature control.
- * Automatic alarm: Sensor fault alarm, over temperature alarm, upper and lower temperature deviation alarm.
- * The shell is made of high-quality sheet and plastic spray, the inner liner material and top cover are made of stainless steel, with the characteristics of high temperature resistance and corrosion resistance.

Technical Parameters:

Model	BK-DS3
Capacity	7.56L
Temp. Range	RT+5°C~100°C
Temp. Precision	0.1°C
Temp. Fluctuation	±0.3°C
Temp. Uniformity	±0.5°C(AT37°C)
Top Cover Inner Liner Material	Stainless steel
Timing Range	0~999min
Opening Size	(150*136mm)*3
Consumption	300W*3
Power Supply	AC220V, 50/60Hz; 110V, 50/60Hz
Internal Size(L*W*H)	(150*140*120mm)*3
External Size(L*W*H)	660*220*250mm
Net Weight	7.62kg
Packing Size(L*W*H)	700*320*295mm
Gross Weight	9kg

Thermostatic Water Bath



Features:

- * Three-well independent temperature control, high efficiency.
- * Rapid heating, precise temperature control.
- * Automatic alarm: Sensor fault alarm, over temperature alarm, upper and lower temperature deviation alarm.
- * Temperature deviation calibration function.
- * The shell is made of cold-rolled steel and is treated with environmentally friendly spraying, which ensures excellent corrosion resistance and prevents rusting easily.

Technical Parameters:

Model	WB-8D
Capacity	3.9L*3
Temp. Control	PID digital temperature control
Temp. Range	RT+5~100°C(Normal atmosphere)
Temp. Fluctuation	≤±0.5°C
Temp. Precision	±0.5°C
Temp. Resolution	0.1°C
Temperature Uniformity	±0.5°C
Timing Range	0~9999 or continuous
Heating Mode	Stainless steel tubular heating
Consumption	900W
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V; 50/60Hz
Internal Size(L*W*H)	(150*174*148)*3mm
External Size(L*W*H)	533*311*260mm
Net Weight	10kg
Package Size(L*W*H)	573*300*345mm
Gross Weight	13kg

Magnetic Stirring Water Bath



Applications:

The magnetic stirring water bath combines the functions of constant temperature control and magnetic stirring, and can provide a stable and adjustable temperature environment. The built-in magnetic stirring device can achieve uniform stirring of the solution. It is suitable for laboratories and laboratories of various universities, scientific research enterprises and institutions, and is widely used for stirring, drying, concentration, distillation, impregnation of chemical reagents, impregnation of drugs and biological products, and can also be used for constant temperature heating of water baths and other temperature tests.

Features:

- * Adopt intelligent digital instrument, high temperature control accuracy, can set temperature, speed and timing working time, intuitive and accurate, clear at a glance
- * Adopt program-controlled integrated voltage stabilization circuit, high-quality DC motor, low noise, stable speed, speed is not affected by voltage fluctuations
- * Adopt fully enclosed ring heater, uniform heating
- * The inner tank is made of 304 stainless steel, which has excellent corrosion resistance
- * Constant temperature heating and stirring of multiple samples at the same time can realize multiple-hole individual stirring and multiple-hole individual temperature control
- * The stirring rod made of polytetrafluoroethylene and high-quality magnetic steel is resistant to high temperature, wear and chemical corrosion

Technical Parameters:

Model	MSW-SCG1	MSW-SCG2	MSW-SCG4	MSW-SCG6	MSW-SCG8
Display	LED Display				
Temp. Range	RT+5~100℃				
Temp. Precision	≤±0.5℃(Above 90℃, it is ±1℃)				
Stirring Speed	30~2000rpm				
Timing Range	0~999min				
Temperature Control Mode	Digital display temperature control, built-in temperature sensor				
Speed Control Mode	Digital display speed control				
Heating Consumption	400W	400W*2	400W*4	400W*6	400W*8
Stirring Consumption	25W	25W*2	25W*4	25W*6	25W*8
Power Supply	Standard: AC220V, 50/60Hz; Optional: AC110V, 50/60Hz				Standard: AC220V, 50/60Hz; Optional: AC110V, 50/60Hz (External transformer)
Chamber Size	φ220*100mm	φ220*100mm*2	φ220*100mm*4	φ220*100mm*6	φ220*100mm*8
External Size(L*W*H)	340*250*220mm	500*340*220mm	590*500*220mm	750*600*220mm	1050*650*220mm
Packing Size(L*W*H)	415*305*270mm	565*415*270mm	720*630*400mm	875*715*400mm	1080*780*410mm
Gross Weight	5.5kg	8.8kg	30kg	41kg	55kg

Magnetic Stirring Water Bath



Features:

- * High-quality cold-rolled steel plate outer shell, the surface is sprayed with environmental protection spray processing, good corrosion resistance.
- * Good performance, no noise, no vibration, fast heating
- * Artistic and reasonable, easy to maintain
- * LED display, real-time temperature display

Technical Parameters:

Model	MSW-101S
Display	LED
Heating Temp. Range	RT+5~100℃
Temperature Precision	±1℃
Stirring Speed	0~2600rpm
Stirring Capacity	50~2000ml
Stirring Power	2.5W
Heating Consumption	600W
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V, 50/60Hz
Work Plate Size	Φ200*100mm
External Size(W*D*H)	340*340*290mm
Net Weight	6.4kg
Package Size(W*D*H)	390*390*360mm
Gross Weight	10kg

Note:

1. Please use a three-phase safety socket and properly grounded.
2. The instrument should be kept clean, it should be cut off the power supply when long-term not using.
3. Do not open the temperature control switch when the stainless steel container is not added with thermal oil and the temperature sensor is not connected, so as to avoid damage to the heating element and constant temperature meter.

Thermostatic Shaking Water Bath



Application:

Suitable for BOD measurement in water analysis, cultivation and preservation of bacteria, viruses, molds, and microorganisms, plant cultivation, breeding experiments, and other applications.

Features:

- * Shaking speed: 40~300 rpm.
- * Temperature control range: RT+5℃ to 100℃, with rapid heating.
- * LED display, independent control of temperature and speed.
- * Selectable timed or continuous operation mode.
- * Inner chamber made of 304 stainless steel, rust-resistant and easy to clean.
- * Comes standard with a universal spring clamp.

Technical Parameters:

Model	SWB-30C	SWB-30R
Shaking Amplitude	20mm	
Shaking Method	Rotatory shaking	Reciprocating shaking
Display	LED Display	
Speed Range	40~300rpm	
Temp. Range	RT+5℃~100℃	
Temp. Precision	±0.5℃	
Timing Range	1~9999min/Continuous	
Standard Tray Configuration	1 pc, universal spring clip	
Tray Size	410*310mm	
Max Load	20kg	
Consumption	1500W	
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V, 50/60Hz	
External Size(W*D*H)	715*550*490mm	
Net Weight	34kg	
Package Size(W*D*H)	770*625*580mm	
Gross Weight	40kg	

Thermostatic Shaking Water Bath



Applications:

It is a temperature-controlled water bath and oscillator combined experimental instrument, plant, biological, microbial, genetic, viral, environmental protection, medical and other scientific research, education and production departments for precision culture preparation indispensable laboratory equipment.

Features:

- * High quality digital display constant speed controller, constant speed without fluctuation.
- * The LCD display, temperature, real-time speed and setting time are displayed on the same interface.
- * With operating parameter memory function, call recovery function, temperature and speed alarm function.
- * Designed with a steady flow plate to prevent splashing in high-speed operation.
- * The inner chamber and fixture are made of high-quality stainless steel with good corrosion resistance.
- * The shell is made of high-quality steel plate, anticorrosive and durable.
- * Standard spring fixture, can be applied to any flask beaker, irregular sample, etc.

Technical Parameters:

Model	SHZ-A10
Shaking Amplitude	20mm
Shaking Method	Reciprocating
Display	LCD Display
Stirring Speed	30~300rpm
Temp. Range	RT+5~100℃
Temp. Precision	0.1℃
Temperature Control Mode	PID microcomputer control
Timing Range	1~9999 min/hour or continuous
Standard Accessory	Universal spring plate
Fixture Plate Size	300*400mm
Consumption	1500W
Power Supply	Standard: 220V, 50/60Hz; Optional: 110V, 50/60Hz
Chamber Size(L*W*H)	490*390*170mm
External Size(L*W*H)	720*480*530mm
Packing Size(L*W*H)	792*612*616mm
Gross Weight	46kg

Thermostatic Shaking Water Bath



SWB-A/C



SWB-B

Features:

- * Microprocessor controller with LED display, high precision of controlling temperature.
- * Advanced multipurpose stainless steel spring clip.

Technical Parameters:

Model	SWB-A	SWB-B	SWB-C
Shaking Amplitude	≥20mm		
Shaking Method	Rotation oscillation, continuous	Rotation oscillation& reciprocating, continuous	Reciprocating, continuous
Display	LED Display		
Rotary Speed	60~280rpm		
Temp. Range	RT~100℃		
Temperature Precision	≤±0.5℃		
Timing Range	0~9999min		
Consumption	1500W		
Power Supply	AC110/220V±10%, 50/60Hz		
Internal Size(L*W*H)	490*390*170mm		
External Size(L*W*H)	700*530*480mm		
Packing Size(L*W*H)	810*600*560mm	810*600*580mm	810*600*580mm
Gross Weight	48kg	52kg	48kg

Thermostatic Shaking Water Bath



Features:

- * Multi-stage speed, temperature and time control system. A variety of different speed, temperature, and time experiment modes can be set at one time, and the operation mode is automatically changed during operation.
- * Ultra-low speed start, after the speed is out of control, it will automatically lock and the start speed can be adjusted.
- * Silent fan design, forced convection mode and unique air duct design ensure good temperature uniformity.
- * The user can freely set three operation modes: forward rotation, reverse rotation, and alternating forward and reverse rotation.
- * LCD liquid crystal display, temperature, time and speed are displayed on the same interface.

Technical Parameters:

Model	SWB-301	SWB-302	SWB-303
Shaking Amplitude	φ26mm	φ26mm or 26mm	26mm
Shaking Method	Rotatory shaking	Rotatory and reciprocating shaking	Reciprocating shaking
Display	LCD		
Control	PID		
Cyclotron Frequency Range	0; 20~300rpm/min(can do static culture, forward and reverse or alternate operation)		
Temp. Range	RT~100°C		
Temp. Precision	±0.1°C		
Timing Range	0~9999h/min		
Max. Capacity	100ml*24 or 250ml*15 or 500ml*8 or 1000ml*6		
Standard Accessory	Spring net box		
Shaking Plate Size	498*316mm		
Consumption	1400W		
Power Supply	Standard: AC220V, 50Hz. Optional: AC220V, 60Hz; AC110V, 50/60Hz		
External Size(W*D*H)	640*620*550mm		
Package Size(W*D*H)	830*790*720mm		
Gross Weight	100kg		

Transparent Water Bath



SY-6L/SY-8L/SY-20L



Features:

- * Adopt new design structure, effectively prevent leakage of steam.
- * High precision temperature control, digital display with high brightness.
- * All made of transparent acrylic sheet, can clearly see objects that are heated.

Technical Parameters:

Model	SY-6L	SY-8L	SY-20L
Capacity	7L	12L	26L
Temp. Range	RT+5~70°C		
Temp. Fluctuation	±1°C		
Temp. Accuracy	±0.1°C		
Tube Rack	1 pc, Height: 20mm, Diameter: 12.5mm		
Consumption	500W	1000W	1500W
Power Supply	AC110/220V±10%, 50/60Hz		
Internal Size	325*175*150mm	325*265*150mm	530*325*160mm
Packing Size	420*275*180mm	420*275*270mm	627*275*330mm
Gross Weight	5.2kg	6.5kg	9.8kg

Thermostatic Oil Bath



Introduction:

Thermostatic oil bath is a kind of laboratory equipment that realizes accurate temperature control and uniform heating by heating oil. It is used in biology, physics, chemical, medical, environmental protection and other experimental science fields or auxiliary heating precision products.

Feature:

- * High efficiency heating, maximum temperature up to 300°C.
- * Microcomputer control, more accurate temperature control, more accurate temperature regulation.
- * The stainless steel inner liner has the advantages of strong corrosion resistance.

Technical Parameters:

Model	BK-OB5	BK-OB10	BK-OB15	BK-OB20
Capacity	5L	10L	15L	20L
Temp. Range	RT+5°C~300°C			
Temp. Fluctuation	±0.5°C			
Temp. Precision	±1°C			
Display	LED Display			
Consumption	1000W	1500W	1800W	1800W
Power Supply	AC220V,50/60Hz; 110V,50/60Hz			
Internal Size(L*W*H)	180*180*150mm	260*260*150mm	310*310*150mm	280*280*300mm
External Size(L*W*H)	380*270*220mm	460*350*220mm	510*400*220mm	440*340*340mm
Net Weight	4.5kg	7.5kg	9.5kg	10kg
Packing Size(L*W*H)	405*295*245mm	485*375*245mm	535*425*245mm	530*420*430mm
Gross Weight	5.5kg	8.5kg	11kg	12.5kg

Thermostatic Oil Bath



OB-1



OB-2

Features:

- * LED display.
- * Automatic protection for overheating.
- * Material: Main body is made of steel plate with Baking varnish ;The inner liner is made of imported stainless steel.
- * Advanced recycle pump system ensures good evenness of temperature(OB-2).

Technical Parameters:

Model	OB-1	OB-2
Capacity	23.5L	37L
Temperature Range	RT~300°C	
Temperature Fluctuation	≤1°C	
Temperature Precision	≤1°C	
Display	LED Display	
Consumption	2000W	
Power Supply	110V/220V±10%, 50/60Hz	
Circulatory System	None	Have
Circuation Pump Flow Rate	None	6L/min
Internal Size(L*W*H)	280*280*300mm	300*300*280mm
Package Size(L*W*H)	520*420*400mm	710*460*570mm
Gross Weight	15kg	33kg

Thermostatic Oil Bath



Application:

Widely used in scientific research, colleges and other enterprises and institutions laboratory distillation, drying, oncentration, temperature stain chemical or biological products, can also be used for constant temperature testing experiments and auxiliary heating.

Features:

- * The inner liner is made of stainless steel plate and precision machining technology
- * High temperature and corrosion resistance
- * Short heat balance time and small temperature fluctuation
- * LED display of test data, intuitive and accurate

Technical Parameters:

Model	BJPX-OB2
Capacity	3.4L
Temperature Control Range	RT+5~300℃
Temperature Precision	±1℃
Temperature Fluctuation	≤1℃
Consumption	600W
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz
External Size(L*W*H)	235*265*190mm
Packing Size(L*W*H)	330*330*300mm
Gross Weight	4kg

Electric Sand Bath



BK-SB1



BK-SB2

Introduction:

This product is suitable for industrial and mining enterprises, scientific research institutions, etc., for chemical analysis, physical determination of heating, especially for the heating of flammable goods.

Technical Parameters:

Model	BK-SB1	BK-SB2
Capacity	12L	
Temp. Range	RT~300℃	
Temp. Fluctuation	±1℃	
Temp. Accuracy	1℃	
Display	Pointer Voltmeter	LED
Thermostatic function	No	Yes
Consumption	2000W	
Power Supply	Standard: AC220V, 50Hz; Optional: 220V, 60Hz; 100V, 50/60Hz	
Internal Size(L*W*H)mm	400*300*100	
External Size(L*W*H)mm	530*340*190	
Package Size(L*W*H)mm	590*400*250	
Net Weight	15.5kg	
Gross Weight	17kg	

High Temperature Thermostatic Circulating Oil / Water Bath



- Features:**
- * The structure is compact and reasonable, the stainless steel inner tank and the outer shell are made of high-quality steel plate electrostatic spraying.
 - * Easy to use and simple to operate.
 - * Accurate temperature control, controllable output flow, energy saving.
 - * The outer circulation interface adopts high-quality copper material, which is anti-corrosion and corrosion-resistant and durable.

Technical Parameters:

Model	OB-5L	OB-10L	OB-20L	OB-30L	OB-50L	OB-100L
Liquid Storage Volume(L)	5	10	20	30	50	100
No-load Max Temperature(℃)	200					
Heating Power(kw)	2	2.8	3.5	4	5	9
Pressure	1.45MPa					
Cycle Way	Sealed magnetic pump cycles					
Flow Rate(L/min)	15-20		20-25			
Temperature Control Range(℃)	Water Bath: RT-100; Oil Bath: RT-200					
Temperature Error	≤2.50%					
HTF Viscosity(c℃St)	Below 500					
Optional Parts	Explosion-proof motor and electricals					
No. of Heating Tube(pc)	1		2		3	
Power Supply	AC220V, 50/60Hz (Standard) (Plug or air switch); AC 110V, 50/60Hz (Optional); Air switch	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional); Air switch			AC380V, 50/60Hz (Standard); AC220V, 50/60Hz (Optional); Air switch	AC380V, 50/60Hz; Air switch
Packing Size(mm)	530*460*800	580*480*740	530*440*870	550*680*850	670*570*910	740*640*1040
Gross Weight(kg)	36	38	42	48	52	63

Refrigerated Water Bath Constant Temperature Shaker



- Features:**
- * LCD display, precise temperature and speed control, with timing function.
 - * The inner liner is made of 304 stainless steel, which is non-corrosive and easy to clean.
 - * PID intelligent control, rapid heating, energy-saving and efficient freezing.
 - * Standard universal spring clamp.
 - * DC brushless motor, with long service life and no maintenance required.

Technical Parameters:

Model	RSWB-30C	RSWB-30R
Shaking Amplitude	20mm	
Shaking Method	Rotatory shaking	Reciprocating shaking
Display	LCD	
Speed Range	20~300rpm	
Temp. Range	-5~100°C	
Temp. Precision	±0.5%	
Timing Range	1~9999min	
Standard Tray Configuration	1pc, universal spring clip	
Tray Size	410*310mm	
Max. Load	20kg	
Consumption	2100W	
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional, external transformer)	
External Size(W*D*H)	715*550*810mm	
Net Weight	61kg	
Packing Size(W*D*H)	810*615*985mm	
Gross Weight	84kg	

Pump

Vacuum Pump



- Features:**
- * Oil free, clean exhausted air by built-in filter.
 - * Automatic cooling exhaust system ensures 24h operation continuously.
 - * The pressure adjustable design can satisfy a certain range of vacuum and gas velocity.
(This function does not apply to model GM-0.20)
 - * TEFLON surface treatment, anti-gas corrosion.
 - * Anticorrosive vacuum pump: GM-0.33IIP, GM-0.5P, GM-0.5IIP, GM-1.0P.

Technical Parameters:

Model	GM-0.20	GM-0.5II GM-0.5IIP	GM-0.5 GM-0.5P	GM-0.33II GM-0.33IIP	GM-1.0 GM-1.0P
Pump Head	1	2	1	1	2
Speed of Evacuation	15L/Min	30L/Min	30L/Min	20L/Min	60L/Min
Ultimate Pressure	0.075Mpa	0.095Mpa	0.08Mpa	0.08Mpa	0.08Mpa
Vacuum	250mbar	50mbar	200mbar	200mbar	200mbar
Pressure	30 Psi Positive or negative pressure	 Negative pressure	30 Positive, Positive or negative pressure	 Negative pressure	30 Positive, Positive or negative pressure
Inlet	φ6mm	φ6mm	φ6mm	φ6mm	φ6mm
Outlet	φ6mm	Silencer	φ6mm	Silencer	φ6mm
Working Temp.	7-40℃				
Body Temp.	<55℃				
Noise	<60dB				
Motor Power Consumption	75W	160W			
Power Supply	AC110/220V±10%, 50/60Hz				
Diaphragm	NBR				
Valves	/	NBR			
Net Weight(kg)	4	10	6.6	6.2	10
Gross Weight(kg)	4.44	10.25	8.4	8.17	10.38
External Size(L*W*H) mm	195*98*156	300*120*235	210*160*235	215*120*235	300*160*235
Package Size(L*W*H) mm	325*210*230	410*230*345	400*220*330	355*215*375	415*255*340

Standard Peristaltic Pump



Introduction:

Peristaltic pumps are mainly used for various liquid transfer. The peristaltic pump driver provides power to drive the pump head to run, and the rotor in the pump head rotates, relying on the pumping efficiency generated by the alternate extrusion and release of several rotors along an elastic hose to work. The squeezed fluid in the tube produces flow output, and when the tube returns to its original state by its own elasticity after the pressure disappears, the volume increases, a vacuum is generated, the fluid is sucked in, and the cycle is repeated.

Features:

- * Full speed function: realize fast filling and emptying.
- * Speed regulation function: The speed can be adjusted manually, or controlled through an external control interface.
- * Direction function: reversible forward and reverse.
- * Display function: display the current speed, direction and status.
- * Power-off memory function: memorize the working state before power-off (continuous work for more than 5s)

Technical Parameters:

Model	SPP-100-2J	SPP-300-2J
Speed Range	0.1-100rpm	0.1-300rpm
Speed Resolution	0.1rpm	0.1-99.9rpm:0.1rpm; 100-300rpm:1rpm
Adjusting Method	Membrane button continuous adjustment	
Display	LED displays current speed	
Power	≤30w	≤75w
Flow Range	0.0002-380ml/min	0.06~1140ml/min
External Size	254*140*140mm	
Protection Class	IP31	
Pump Model	YZ15A	
Suitable Pump Hose	13# 14# 19# 16# 25# 17# 18#	
Ambient Temperature	10°C-40°C	
Relative Humidity	≤80%	
Atmosphere Pressure	860hPa-1060hPa	
Power Supply	100-240V 50/60HZ	100-270V 50/60HZ
Full Speed Function	Fast filling and emptying	
Speed Adjustable Function	Manual speed adjustment	
Direction Function	Reversible	
Display Function	Display current speed, direction and status	
Power-off memory function	Memory of working status before power failure (working continuously for more than 5 seconds)	
Standard Accessories	YZ15A pump head, 2 meters of 14#pump hose	
Optional Accessory	Foot switch	
Packing Size	390mm*340mm*240mm	
Gross Weight	3.3Kg	

Dispensing Peristaltic Pump



DPP-100-BF/ DPP-300-BF



DPP-600-BF

Features:

- * Direction control, reverse direction.
- * With fast cleaning, emptying function, back suction function, prevent liquid dripping.
- * LCD display.
- * The function of communicating with the upper computer or computer.
- * Distribution function includes distribution liquid quantity, distribution times, time interval and other functions.
- * Automatic storage of various user parameters.
- * Can be calibrated for flow and distribution fluid volume to improve accuracy.
- * Forced air cooling heat dissipation, to ensure the normal use of products.

Technical Parameters:

Model	DPP-100-BF	DPP-300-BF	DPP-600-BF
Speed Range	0.1-100rpm	0.1-300rpm	0.1-600rpm
Speed Resolution	0.1rpm	0.1rpm	0.1rpm
Flow Range	0.16μL/min~500mL/min	1.6μL/min~1.5L/min	0.052-3000ml/min
Dispensed Fluid Volume	0.01mL~9.99L	0.01mL~99.99L	
Dispensed Number	0~9999		
Dispensing Interval Time	0.1s~99.9min		
Suction Back Time	0~99.9s		
External Control Input	4~20Ma, 0~5V, 0~10V, 0~10KHz Flow control, forward and reverse, start and stop control		
External Control Output	Start/stop, direction signal, speed signal		
Power Supply	90~264V 50Hz/60Hz		
Power	<40W	<60W	<140W
Working Condition	Ambient temperature: 0~40°C; Relative Humidity: <80%		
Protection Class	IP31		
Adjustable Pump Head	YZ15A, YZ25, YZ II 15, YZ II 25, DG-1, DG-2, DG-4		
Operation Method	Mechanical buttons and knob coding switches complete all operations		
Direction Control	Reversible in both directions		
Full Speed Function	Quick cleaning and emptying function		
Back Suction Function	Prevent liquid from dripping		
Display	128*64 dot matrix Chinese character LCD displays all information		
Communication Function	It has the function of communicating with the host computer or computer		
Flow Function	It can deliver liquid according to the set flow rate		
Distribution Function	Including the functions of dispensing liquid volume, dispensing times, time interval, etc.		
Standard Accessories	YZ15A pump head, 2 meters of 14# pump tube		
Optional Accessories	Foot switch, 4~20mA, 0~5V, 0~10V, 0~10KHz external control		
External Size	300*171*189mm		330*250*190mm
Net Weight	3.2kg		5.0kg
Packing Size	390*340*240mm		450*390*270mm
Gross Weight	4.1Kg		6.8kg

Standard Peristaltic Pump SPP Series



Features:

- * LED display.
- * Support RS485 / MODBUS communication protocol, analog control (0-5V, 0-10V, 4-20mA...) foot switch control.
- * Program control.
- * Memory function——data will be stored in time after power off.
- * Full speed function——one button to control full speed operation, used for quick cleaning, filling and emptying tubes, etc.

Technical Parameters:

Model	SPP-BT100M	SPP-BT300M	SPP-BT600M
Pump Head	YZ1515x, YZ2515x, DG series(only SPP-BT100M)		
Speed Range	0.1-100rpm(Reversible)	0.1-300rpm(Reversible)	0.1-600rpm(Reversible)
Speed Resolution	0.1rpm		
Flow Range	0.0015-380ml/min	0.007-1140ml/min	0.007-2280ml/min
Filling Precision	<±0.5%		
Display	4-LED display		
Back Suction Speed	10~100rpm	10~300rpm	
Optional Accessory	Foot switch		
Environmental Conditions	Temperature: 0 ~ 40 ℃; Humidity: < 80%, no condensation		
Consumption	22W	35W	50W
Power Supply	AC110/220V±10%, 50/60Hz		
Instrument Size(W*D*H)	234*154*143mm		254*184*150mm
Package Size(W*D*H)	393*243*243mm		403*283*253mm
Gross Weight	5.15kg		5.8kg

Pump Head:



Pump Parameters:

Standard Peristaltic Pump SPP Series		Model	SPP-BT100M	SPP-BT300M	SPP-BT600M
		Speed Range	0.1-100rpm	0.1-300rpm	0.1-600rpm
		Tubing	(Reversible)	(Reversible)	(Reversible)
Pump Head&Single channel flow	YZ1515x	13#,14#,19#, 16#,25#,17#,18#	0.007-380ml/min	0.007-1140ml/min	0.007-2280ml/min
	YZ2515x	15#,24#	0.17-290ml/min	0.17-870ml/min	0.17-1740ml/min
	2*YZ1515x	13#,14#,19#, 16#,25#,17#,18#	0.007-380ml/min	0.007-1140ml/min	0.007-2280ml/min
	2*YZ2515x	15#,24#	0.17-290ml/min	0.17-870ml/min	0.17-1740ml/min
	DG-1(6)	0.5*0.8, 1*1, 2*1, 2.4*0.8, 3*1	0.002~36ml/min	/	/
	DG-1(10)		0.0015~27ml/min	/	/
	DG-2(6)		0.002~36ml/min	/	/
	DG-2(10)		0.0015~27ml/min	/	/
	DG-4(6)		0.002~36ml/min	/	/
	DG-4(10)		0.0015~27ml/min	/	/

Remark: Customers can choose any one model hose as the standard configuration and the standard length is 2 meters.

Intelligent Flow Rate Peristaltic Pump FPP Series



Features:

- * Storage function——user data storage function:(9 sets of filling data) , support RS485/MODBUS communication protocol, analog control ((0-5V, 0-10V, 4-20mA...).
- * External control function——Multiple mode selection: communication mode, analog mode, foot switch control.Provide customized services.
- * Memory function——data will be stored in time after power off.
- * Calibration function——intelligent flow calibration: after setting the target flow, input the actual flow value, and the system will automatically carry out flow calibration to ensure the flow accuracy.
- * Full speed function——one button to control full speed operation, used for quick cleaning, filling and emptying tubes, etc
- * Suckback function——By setting Suckback angle and Suckback speed to prevent liquid dripping and ensure fluid accuracy.
- * Lock screen function——lock screen design, error proof touch, application more secure.
- * LCD touch screen, real-time display of operation status and working parameters.
- * Whole housing design-stainless steel housing, sturdy and durable , multi-face seamless whole housing design, Long service life, high cost performance.

Technical Parameters:

Model	FPP-BT100LC	FPP-BT300LC	FPP-BT600LC
Pump Head	YZ1515x, YZ2515x, DG series(only FPP-BT100LC)		
Speed Range	0.1-100rpm(Reversible)	0.1-300rpm(Reversible)	0.1-600rpm(Reversible)
Speed Resolution	0.1rpm		
Flow Range	0.0015-380ml/min	0.007-1140ml/min	0.007-2280ml/min
Filling Precision	<±0.5%		
Display	LCD		
Back Suction Angle	10°~720°		
Back Suction Speed	10~100rpm	10~300rpm	
Optional Accessory	Foot switch		
Environmental Conditions	Temperature: 0 ~ 40 ℃; Humidity: < 80%, no condensation		
Consumption	22W	35W	50W
Power Supply	AC110/220V±10%, 50/60Hz		
Instrument Size(W*D*H)	212*140*240mm		
Package Size(W*D*H)	363*253*353mm		
Gross Weight	6kg		6.9kg

Pump Head:



YZ1515X

DG Series

YZ2515X

Pump Parameters:

Standard Peristaltic Pump SPP Series		Model	FPP-BT100LC	FPP-BT300LC	FPP-BT600LC
		Speed Range	0.1-100rpm (Reversible)	0.1-300rpm (Reversible)	0.1-600rpm (Reversible)
		Tubing			
Pump Head& Single channel flow	YZ1515x	13#,14#,19#, 16#,25#,17#,18#	0.007-380ml/min	0.007-1140ml/min	0.007-2280ml/min
	YZ2515x	15#,24#	0.17-290ml/min	0.17-870ml/min	0.17-1740ml/min
	2*YZ1515x	13#,14#,19#, 16#,25#,17#,18#	0.007-380ml/min	0.007-1140ml/min	0.007-2280ml/min
	2*YZ2515x	15#,24#	0.17-290ml/min	0.17-870ml/min	0.17-1740ml/min
	DG-1(6)	0.5*0.8, 1*1, 2*1, 2.4*0.8, 3*1	0.002~36ml/min	/	/
	DG-1(10)		0.0015~27ml/min	/	/
	DG-2(6)		0.002~36ml/min	/	/
	DG-2(10)		0.0015~27ml/min	/	/
	DG-4(6)		0.002~36ml/min	/	/
	DG-4(10)		0.0015~27ml/min	/	/

Remark: Customers can choose any one model hose as the standard configuration and the standard length is 2 meters.

Dispensing Peristaltic Pump DPP Series



Features:

- * Storage function—user data storage function:(9 sets of filling data) , support RS485/MODBUS communication protocol, analog control ((0-5V, 0-10V, 4-20mA...).
- * External control function—Multiple mode selection: communication mode, analog mode, foot switch control.Provide customized services.
- * Memory function—data will be stored in time after power off.
- * Calibration function—intelligent flow calibration: after setting the target flow, input the actual flow value, and the system will automatically carry out flow calibration to sure the flow accuracy.
- * Full speed function—one button to control full speed operation, used for quick cleaning, filling and emptying tubes, etc
- * Suckback function—By setting Suckback angle and Suckback speed to prevent liquid dripping and ensure fluid accuracy.
- * Lock screen function—lock screen design, error proof touch, application more secure.
- * LCD touch screen, real-time display of operation status and working parameters.
- * Whole housing design-stainless steel housing, sturdy and durable , multi-face seamless whole housing design, Long service life, high cost performance.

Technical Parameters:

Model	DPP-BT100FC		DPP-BT300FC	DPP-BT600FC
Pump Head	YZ1515x, YZ2515x, DG series(only DPP-BT100FC)			
Speed Range	0.1-100rpm(Reversible)	0.1-300rpm(Reversible)		0.1-600rpm(Reversible)
Speed Resolution	0.1rpm			
Flow Range	0.0015-380ml/min	0.007-1140ml/min		0.007-2280ml/min
Filling Precision	<±0.5%			
Display	LCD			
Back Suction Angle	10°~720°			
Back Suction Speed	10~100rpm	10~300rpm		
Optional Accessory	Foot switch			
Environmental Conditions	Temperature: 0 ~ 40 °C; Humidity: < 80%, no condensation			
Consumption	22W	35W	50W	
Power Supply	AC110/220V±10%, 50/60Hz			
Instrument Size(W*D*H)	212*140*240mm			
Package Size(W*D*H)	363*253*353mm			
Gross Weight	6kg			6.9kg

Pump Head:



Pump Parameters:

Standard Peristaltic Pump SPP Series		Model	DPP-BT100FC	DPP-BT300FC	DPP-BT600FC
		Speed Range	0.1-100rpm	0.1-300rpm	0.1-600rpm
		Tubing	(Reversible)	(Reversible)	(Reversible)
Pump Head& Single channel flow	YZ1515x	13#,14#,19#, 16#,25#,17#,18#	0.007-380ml/min	0.007-1140ml/min	0.007-2280ml/min
	YZ2515x	15#,24#	0.17-290ml/min	0.17-870ml/min	0.17-1740ml/min
	2*YZ1515x	13#,14#,19#, 16#,25#,17#,18#	0.007-380ml/min	0.007-1140ml/min	0.007-2280ml/min
	2*YZ2515x	15#,24#	0.17-290ml/min	0.17-870ml/min	0.17-1740ml/min
	DG-1(6)	0.5*0.8, 1*1, 2*1, 2.4*0.8, 3*1	0.002~36ml/min	/	/
	DG-1(10)		0.0015~27ml/min	/	/
	DG-2(6)		0.002~36ml/min	/	/
	DG-2(10)		0.0015~27ml/min	/	/
	DG-4(6)		0.002~36ml/min	/	/
	DG-4(10)		0.0015~27ml/min	/	/

Remark: Customers can choose any one model hose as the standard configuration and the standard length is 2 meters.

Dispensing Peristaltic Pump BT-F Series

Features:

- * Color LCD display, touch screen and keypad for operating.
- * LF-Touch-OS software system, efficient and stable, with good human-computer interaction mode, convenient product customization and upgrade.
- * Three types of working mode: volume dispensing mode, time dispensing mode, copy dispensing mode.
- * Automatically store five groups of working parameters.
- * Precious controlling technology for motor's rotating angle increases the dispensing accuracy comparing to traditional time dispensing mode caused by factors such as the slow start of the motor.
- * Start/stop, reversible direction, full speed, adjust speed, state memory (power-down memory).
- * Speed resolution is 0.1rpm.
- * Display and control flow rate, accumulate dispensing volume automatically.
- * Calibration function.
- * The operating expert system guides users setting parameters correctly.
- * Intelligent temperature-control technology reduces working noise.
- * External high-low electrical level controls the start/stop, reversible direction and easy dispensing function, optically coupled isolator, external analog adjusts the rotate speed.
- * RS485 communication interface, MODBUS protocol is available, easy to connect other equipment.
- * Internal double-deck isolation structure, circuit board with conformal coating makes it dust-proof and moisture-proof.
- * Super anti-interference feature, wide input voltage range, acceptable for the complex power environment .
- * ABS plastic housing, creative streamlined appearance, beautiful and simple.
- * Can drive multi-channels and various types of pump heads.
- * Connect foot switch control start-stop for dispensing volume.



Technical Parameters

Model	BT101F	BT301F	BT601F
Flow Range	0.0001~720ml/min	0.005~1750ml/min	0.006~3000ml/min
Rotation Range	0.1~150rpm	0.1~350rpm	0.1~600rpm
Speed Resolution	0.1rpm		
Dispensed Liquid Volume Range	0.05ml~9999l		
Dispensed Frequency Range	1 to 999 times, "0" means infinite loop		
Dispensed Interval Time	0.1~999.9 seconds/minute/hour, time unit is adjustable		
Speed Accuracy	<±0.2%		
Power Supply	AC100~240V, 50Hz/60Hz		
Power	<30W	<40W	<50W
External Control Interface	External control input level 5V, 12V (standard), 24V (optional); external control analog 0-5V (standard), 0-10V, 4-20mA (optional)		
Communication Interface	RS485 communication, compatible with Modbus protocol		
Working Environment	Ambient temperature 0~40℃, relative humidity <80%		
Protection Level	IP31		
Overall Dimensions (L*W*H)	261*180*197mm		
Drive Weight	4.5kg	4.7kg	4.9kg
Packing Size	430*290*320mm		
Gross Weight	8kg		

Pump Head:



DG type



DT type



YZ15/YZ25



YT15/YT25

Applicable Pump Head, Hose& Flow Parameters

Driver Model	Applicable Pump Head	Number Of Channels	Applicable Hose	Single Channel Flow Rate(ml/min)
BT101F	DG/DS (6 rollers)	1,2,4	Wall0.8~1mm, ID≤3.17mm	0.00016~49
	DG/DS (10 rollers)	1,2,4	Wall0.8~1mm, ID≤3.17mm	0.00011~32
	YZ15/YZ15T	1,2	13#14#19#16#25#17#18#	0.005~641
	YT25	1	114#116#15#24#35#36#	0.024~750
BT301F	YZ15/YZ15T	1	13#14#19#16#25#17#18#	0.005~1495
	YT25	1	114#116#15#24#35#36#	0.024~1750
BT601F	YZ15/YZ15T	1	13#14#19#16#25#17#18#	0.005~2562
	YT25	1	114#116#15#24#35#36#	0.024~3000

Remark: Customers can choose any one model hose as the standard configuration and the standard length is 2 meters.

Flow Rate Peristaltic Pump BT-L Series

Features:

- * Color LCD display, touch screen and keypad for operating.
- * LF-Touch-OS software system, efficient and stable, with good human-computer interaction mode, convenient product customization and upgrade.
- * Start/stop, reversible direction, full speed, adjust speed and state memory (power-down memory).
- * Speed resolution 0.1rpm.
- * Flow display, flow control and flow accumulation.
- * Flow calibration function.
- * Easy dispensing function, it realizes the repeat timing quantitative dispensing without the time controller.
- * Intelligent temperature control function to minimize peristaltic pump noise, 45 decibel super mute design.
- * External high-low electrical level controls the start/stop, reversible direction and easy dispensing function, optically coupled isolator, external analog adjusts the rotate speed.
- * RS485 interface, MODBUS protocol is available, easy to connect other equipment.
- * The internal structure adopts double-deck isolation design, and the circuit board with conformal coating makes it dust-proof and moisture-proof.
- * Super anti-interference feature, wide input voltage range, acceptable for the complex power environment.
- * ABS plastic housing, creative streamlined appearance, concise and beautiful.
- * Can drive multi-channels and various types of pump heads.



Technical Parameters

Model	BT101L	BT301L	BT601L
Flow Range	0.0001~720ml/min	0.005~1750ml/min	0.006~3000ml/min
Rotation Range	0.1~150rpm	0.1~350rpm	0.1~600rpm
Speed Resolution	0.1rpm		
Speed Accuracy	<±0.2%		
Power Supply	AC100~240V, 50Hz/60Hz		
Power	<30W	<40W	<50W
External Control Interface	External control input level 5V, 12V (standard), 24V (optional); external control analog 0-5V (standard), 0-10V, 4-20mA (optional)		
Communication Interface	RS485 communication, compatible with Modbus protocol		
Working Environment	Ambient temperature 0~40℃, relative humidity <80%		
Protection Level	IP31		
Overall Dimensions (L*W*H)	261*180*197mm		
Drive Weight	4.5kg	4.7kg	4.9kg
Packing Size	430*290*320mm		
Gross Weight	8kg		

Pump Head:



DG type



DT type



YZ15/YZ25



YT15/YT25

Applicable Pump Head, Hose& Flow Parameters

Driver Model	Applicable Pump Head	Number Of Channels	Applicable Hose	Single Channel Flow Rate(ml/min)
BT101L	DG/DS(6 rollers)	1,2,4	Wall 0.8~1mm, ID≤3.17mm	0.0002~49
	DG/DS(10 rollers)	1,2,4	Wall 0.8~1mm, ID≤3.17mm	0.00011~32
	YZ15/YZ15T	1,2	13# 14# 19# 15# 25# 17#18#	0.005~641
	YT25	1	114#116#15#24#35#36#	0.024~750
BT301L	YZ15/YZ15T	1,2	3#14#19#16#25#17#18#	0.005~1495
	YT25	1	114#116#15#24#35#36#	0.024~1750
BT601L	YZ15/YZ15T	1,2	13#14#19#16#25#17#18#	0.005~2562
	YT25	1	114#116#15#24#35#36#	0.024~3000

Remark: Customers can choose any one model hose as the standard configuration and the standard length is 2 meters.

Standard Peristaltic Pump BT-S Series

Features:

- * 128*32 LCD screen, Chinese and English switching, simple parameter setting, intuitive status display.
- * It can realize start and stop, speed regulation, timing operation and other operations remotely through the Lead Fluid APP software, and has monitoring functions such as shutdown alarm, pump tube replacement reminder and so on (optional)
- * Delay start and delay stop function.
- * Start/stop, reversible direction, full speed, adjust speed, state memory (power-down-memory).
- * External analog speed regulation, external control signal control start and stop, positive and negative, physical isolation of external control signal.
- * External control signal supports 5-24v wide voltage input.
- * External speed control signal type (voltage or current) can be switched through the control panel.
- * RS485 communication interface, MODBUS protocol is available, support communication parameter setting easy to connect other equipment.
- * Set multiple control parameters for ODM customization application.
- * Circuit board with conformal coating makes it dust-proof and moisture-proof.
- * Super anti-interference feature, wide input voltage range, acceptable for the complex power environment .
- * ABS plastic housing, creative streamlined appearance, beautiful and simple.



Technical Parameters

Model	BT101S	BT301S	BT601S
Flow Range	0.0001~720ml/min	0.005~1750ml/min	0.006~3000ml/min
Rotation Range	0.1~150rpm	0.1~350rpm	0.1~600rpm
Speed Resolution	0.1~100rpm: 0.1rpm; 100~600rpm: 1rpm		
Speed Accuracy	<±0.5%		
Power Supply	AC100~240V, 50Hz/60Hz		
Power	<30W	<40W	<50W
External Control Interface	External control input level 5V, 12V (standard), 24V (optional); external control analog 0-5V (standard), 0-10V, 4-20mA (optional)		
Communication Interface	RS485 communication, compatible with Modbus protocol		
Working Environment	Ambient temperature 0~40℃, relative humidity <80%		
Protection Level	IP31		
Overall Dimensions (L*W*H)	261*180*197mm		
Drive Weight	4.5kg	4.7kg	4.9kg
Packing Size	430*290*320mm		
Gross Weight	8kg		

Pump Head:



DG type



DT type



YZ15/YZ25



YT15/YT25

Applicable Pump Head, Hose& Flow Parameters

Driver Model	Applicable Pump Head	Number Of Channels	Applicable Hose	Single Channel Flow Rate(ml/min)
BT101S	DG/DS (6 rollers)	1,2,4	Wall 0.8~1mm, ID≤3.17mm	0.00016~49
	DG/DS (10 rollers)	1,2,4	Wall 0.8~1mm, ID≤3.17mm	0.00011~32
	DT10-18/28	1,2	13#14#, Wall 0.8~1mm, ID≤3.17mm	0.00023~64
	YZ15/YZ15T	1,2	13# 14# 19# 16# 25# 17# 18#	0.005~641
	YT25	1	114#116#15#24#35#36#	0.024~750
BT301S	YZ15/YZ15T	1,2	13# 14# 19# 16# 25# 17# 18#	0.005~1495
	YT25	1	114#116#15#24#35#36#	0.024~1750
BT601S	YZ15/YZ15T	1,2	13# 14# 19# 16# 25# 17# 18#	0.005~2562
	YT25	1	114#116#15#24#35#36#	0.024~3000

Remark: Customers can choose any one model hose as the standard configuration and the standard length is 2 meters.

Safety Storage Cabinet

Features:

- * Two-layer anti-fire steel plate with 38mm between two steel plates for insulation.
- * Main body material: 1.0mm steel plate painted with epoxy resin.
- * Safety: Three-linkage lock. The door has two keys and is available to use padlock which realize safe management of double-locked with two key holders.
- * 50mm height anti-leakage liquid tank ensures no liquid overflow.
- * Specific warning labels for different kinds of safety storage cabinet.
- * Installed with double air vents which are set with anti-fire devices.
- * Adjustable anti-leakage shelves.
- * An electrostatic grounded conductive port for easy connection to an electrostatic ground wire.

Flammable Chemicals Storage Cabinet



Technical Parameters:

Model	BKSC-4Y	BKSC-12Y	BKSC-22Y	BKSC-30Y	BKSC-45Y	BKSC-60Y	BKSC-90Y
Capacity	4 gallon(15L)	12 gallon(45L)	22 gallon(83L)	30 gallon(114L)	45 gallon(170L)	60 gallon(227L)	90 gallon(340L)
Material	Double-layer anti-fire cold-rolled steel						
Adjustable Shelf	1 pc		3 pcs	1 pc	2 pcs		
Door	Single/Manual			Double/Manual			
External Size (W*D*H) mm	430*430*560	590*460*890	600*460*1650	1090*460*1120	1090*460*1650	860*860*1650	1090*860*1650
Package Size (W*D*H) mm	505*505*585	665*535*915	680*540*1790	1170*540*1260	1170*540*1790	940*940*1790	1170*940*1790
Gross Weight	28kg	50kg	93kg	101kg	138kg	170kg	200kg

BIOBASE series yellow safety cabinet for storing all kinds of flammable materials, with flashing point below 45°C.

Combustible Chemicals Storage Cabinet



Technical Parameters:

Model	BKSC-4R	BKSC-12R	BKSC-22R	BKSC-30R	BKSC-45R	BKSC-60R	BKSC-90R
Capacity	4 gallon(15L)	12 gallon(45L)	22 gallon(83L)	30 gallon(114L)	45 gallon(170L)	60 gallon(227L)	90 gallon(340L)
Material	Double-layer anti-fire cold-rolled steel						
Adjustable Shelf	1 pc		3 pcs	1 pc	2 pcs		
Door	Single/Manual			Double/Manual			
External Size (W*D*H) mm	430*430*560	590*460*890	600*460*1650	1090*460*1120	1090*460*1650	860*860*1650	1090*860*1650
Package Size (W*D*H) mm	505*505*585	665*535*915	680*540*1790	1170*540*1260	1170*540*1790	940*940*1790	1170*940*1790
Gross Weight	28kg	50kg	93kg	101kg	138kg	170kg	200kg

BIOBASE series red safety cabinet for storing various kinds of flammable materials with flashing points above 45°C.

Weak Acid and Alkali Chemicals Storage Cabinet



Technical Parameters:

Model	BKSC-4B	BKSC-12B	BKSC-22B	BKSC-30B	BKSC-45B	BKSC-60B	BKSC-90B
Capacity	4 gallon(15L)	12 gallon(45L)	22 gallon(83L)	30 gallon(114L)	45 gallon(170L)	60 gallon(227L)	90 gallon(340L)
Material	Double-layer anti-fire cold-rolled steel,PP tray						
Adjustable Shelf	1 pc		3 pcs	1 pc	2 pcs		
Door	Single/Manual			Double/Manual			
External Size (W*D*H) mm	430*430*560	590*460*890	600*460*1650	1090*460*1120	1090*460*1650	860*860*1650	1090*860*1650
Package Size (W*D*H) mm	505*505*585	665*535*915	680*540*1790	1170*540*1260	1170*540*1790	940*940*1790	1170*940*1790
Gross Weight	28kg	50kg	93kg	101kg	138kg	170kg	200kg

BIOBASE series blue safety cabinet for storing weak acid, weak alkali and weak corrosive items.

Strong Acid & Alkali Storage Cabinet



Features:

- * Padlock design.
- * Adjustable shelves.
- * Anti-corrosive materials for strong acid and alkali.
- * Customizable.

Technical Parameters:

Model	BABC-4P	BABC-12P	BABC-20P	BABC-28P	BABC-30P	BABC-45P	BABC-60P	BABC-90P
Capacity	4 gallon(15L)	12 gallon(45L)	20 gallon(75L)	28 gallon(105L)	30 gallon(114L)	45 gallon(170L)	60 gallon(227L)	90 gallon(340L)
Material	pp							
Adjustable shelf	Optional	1 pc		2 pcs				
Door	Single/Manual		Double/Manual					
External Size (W*D*H) mm	430*430*560	590*460*890	910*590*890	910*600*900	1090*460*1120	1090*460*1650	860*860*1650	1090*860*1650
Package Size (W*D*H) mm	515*515*695	675*545*1025	995*675*1025	995*685*1035	1175*545*1255	1175*545*1785	945*945*1785	1173*943*1785
Gross Weight	16kg	30kg	46kg	48kg	58kg	72kg	90kg	107kg

Toxic Chemical Storage Cabinet



Features:

- * Two layers of fireproof steel plates with 38mm thermal insulation between the two steel plates.
- * Main body material: 1.0mm steel plate, epoxy resin spraying.
- * Security: Equipped with electronic password lock and mechanical lock.
- * 50mm high leak-proof liquid tank ensures no liquid spillage.
- * Installed with dual air outlets with fire protection.
- * Customizable.

Technical Parameters:

Model	CSC-12D	CSC-22D	CSC-30D	CSC-45D	CSC-60D	CSC-90D
Capacity	12gallon (45L)	22gallon (83L)	30gallon (114L)	45gallon (170L)	60gallon (227L)	90gallon (340L)
Standard Shelf	1pc	3pcs	1pc	2pcs	2pcs	2pcs
External Size (W*D*H)mm	590*460*890	600*460*1650	1090*460*1120	1090*460*1650	860*860*1650	1090*860*1650
Package Size (W*D*H)mm	665*535*915	680*540*1795	1170*540*1260	1170*540*1790	940*940*1790	1170*940*1790
Gross Weight	50kg	93kg	101kg	138kg	170kg	200kg

Flammable & Toxic Substances Integrated Storage Cabinet



Introduction:

Professional storage solutions for items requiring strict temperature control and high security.

Feature:

- * Microcomputer timer switch for automated fan operation.
- * Real-time temperature/humidity monitoring with alarm triggers for deviations.
- * Four steel casters for mobility; thermal insulation with rockwool.
- * Dual-lock management system.
- * Cold-rolled steel casing with epoxy powder coating; PP resin inner lining.
- * Three-tiered PP resin shelves with color-coded PVC strips (red/blue/yellow) for hazard classification (alkaline/acidic/flammable).

Technical Parameters:

Model	CSC-1840Y	CSC-1840B
Material	Shell:Cold-rolled steel; Inner liner:PP	
Doors	2	
Shelves	Three-tiered PP resin shelves with color-coded PVC strips	
Lock	Electronic password lock + mechanical lock	
Function	Automatic ventilation, temperature and humidity alarm	
Power Supply	AC110/220V,50/60Hz	
Internal Size(W*D*H)	794*470*1524mm	
External Size(W*D*H)	900*510*1840mm	
Net Weight	125kg	
Package Size(W*D*H)	994*604*1970mm	
Gross Weight	144kg	

Gas Cylinder Cabinet



BKSC-1Q



BKSC-2Q



BKSC-3Q

Introduction:

The gas cylinder cabinet is a metal container used to improve local exhaust ventilation, protect steel cylinders (gas cylinders) from fire outside the cabinet and protect surrounding objects from internal fire.

Features:

- * Cabinet body: It adopts high-quality cold-rolled steel plate, which is treated with pickling and phosphating, and the surface is electrostatically sprayed to achieve the effect of anti-acid and alkali and anti-rust.
- * Door panel: It adopts detachable hinges, and the window is tempered glass.
- * Ventilation holes: There are 4 ventilation holes on each side to facilitate gas circulation.
- * Fixed chain: Internal fixed chain is used to prevent the cylinder from tipping over.
- * Pedal: There are adjustable pedals at the bottom of the cabinet to facilitate the loading and unloading of gas cylinders.

Technical Parameters:

Model	BKSC-1Q	BKSC-2Q	BKSC-3Q
Capacity	40L(1 bottle)	80L(2 bottles)	120L(3 bottles)
Door Type	Single door	Double door	
External Size(W*D*H)	600*450*1900mm	900*450*1900mm	1200*450*1900mm
Package Size(W*D*H)	674*544*2030mm	994*544*2030mm	1294*544*2030mm
Net Weight	61kg	85kg	102kg
Gross Weight	78kg	105kg	124kg

Optional Alarm Apparatus:

NO.	NO.1	NO.2
Power Supply	AC110/220V 50/60Hz	
Control Model	When the internal sensor detects a gas leak, the cabinet will automatically trigger an alarm, and the top fan will start operating automatically to expel the gas outdoors through the exhaust duct.	Monitoring mode: Press the monitoring button to enter the monitoring mode and conduct real-time detection. Time control mode: Press the time control button, the indicator light will turn on, and the controller will activate the fan for 5 minutes every 15 minutes.
Alarm Type	Audible and visible alarm	
Identifiable Gas	Methane, acetylene, hydrogen, coal gas, etc.	

Medical Drying Cabinet

Introduction:

Medical drying cabinet is a large-capacity medical drying equipment developed by our company according to the needs of medical and scientific research institutes. It is used to dry reusable medical products such as surgical instruments, anesthesia instruments, glassware, and catheter endoscopes. The operation is simple and flexible, the drying temperature setting range is 40°C~80°C, and the drying time setting range is 1min~999min. Users can freely set drying procedures suitable for medical institutions, scientific research institutes, laboratories, biopharmaceuticals and other medical, scientific research and production units according to their needs.

Application:

Suitable for disinfection supply centers, operating rooms and other departments that require dry items.

Feature:

- * Made of high-quality 304 stainless steel, with low bacterial adhesion rate, safe and convenient to use.
- * Insulation interlayer, effectively prevent heat loss.
- * With a glass window, you can observe the internal working conditions at any time.
- * Reasonable air duct and circulation system to ensure good temperature uniformity.
- * Shelf height is adjustable.
- * Using brand motor and fan blades, the wind speed is strong, which is conducive to the renewal and circulation of air in the inner cavity.
- * It can centrally handle a large number of required drying items, and can simultaneously dry surgical instruments, anesthesia pipes, and respiratory treatment items.
- * Inch PLC human-computer interaction control system, flexible and convenient operation, safe and stable work.


Technical Parameters:

Model	BKGZ-400	BKGZ-600
Capacity (L)	400	600
Material	S30408	
Door	Double-opening tempered glass visual airtight door	
Temperature Range	40~80°C	
Time Setting	1~999min	
Power Supply	AC220V, 50/60Hz(Standard); AC380V, 50/60Hz(Three-phase, Optional)	AC380V,50/60Hz (Standard); AC220V, 50/60Hz (Single-phase, Optional)
Consumption	5.8kW	6.6kW
Standard Accessories	9*shelves;9*trays;2* catheter holders	
Optional Accessories	2*humidification bottle holders	
External Size (W*D*H)	950*550*2170mm	950*750*2170mm
Package Size (W*D*H)	1060*870*2350mm	1060*1050*2350mm
Net Weight	320kg	350kg
Gross Weight	380kg	420kg



Pathology Lab Equipment

Flow Chart

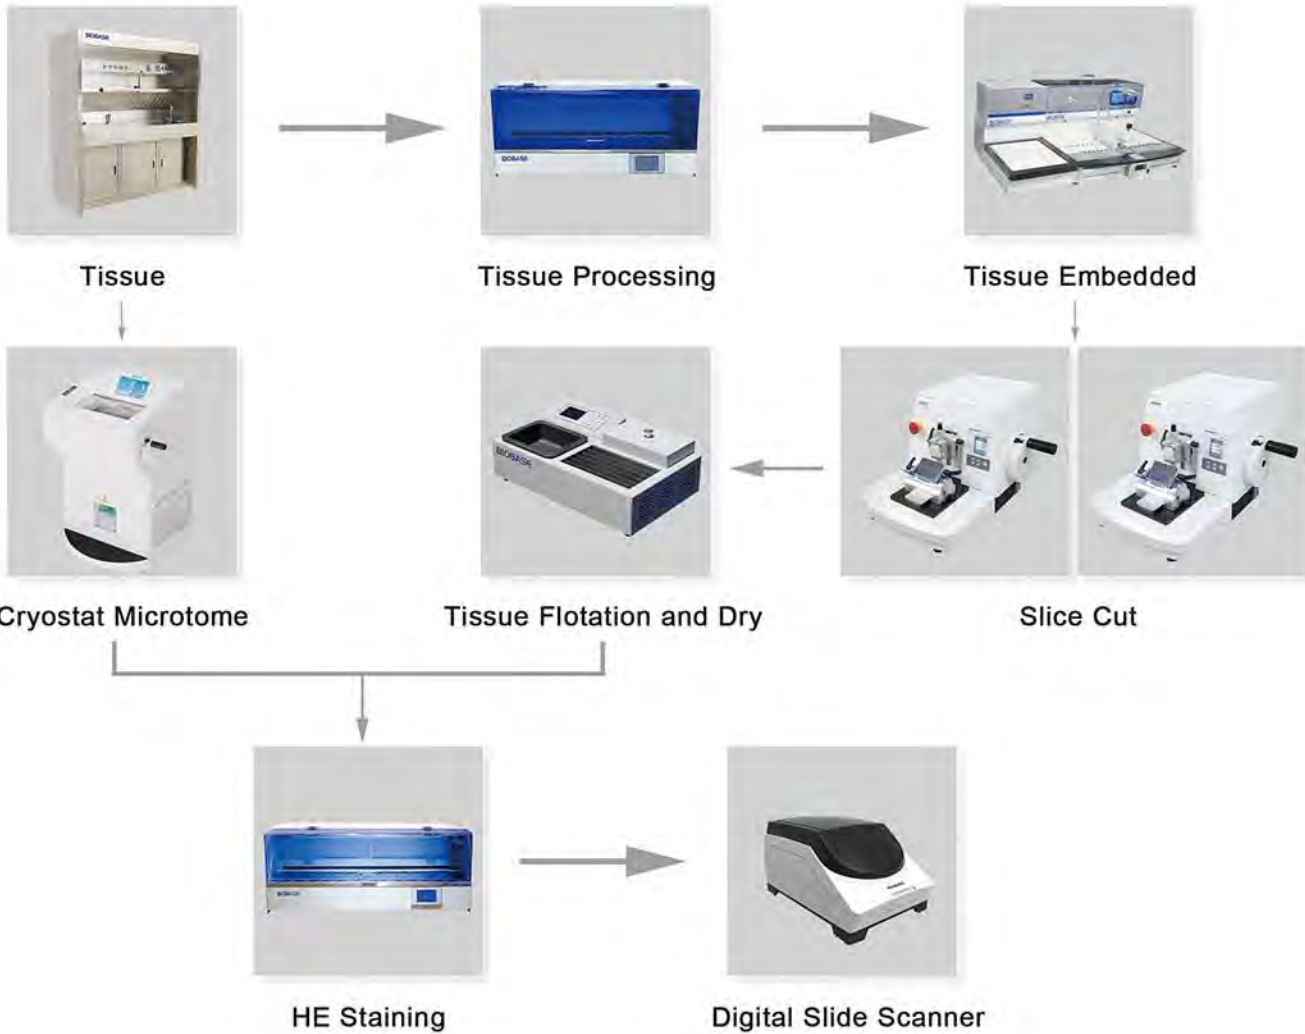

Content

258	Consumables	268	Tissue Flotation Water Bath & Slide Dryer
259	Automated Tissue Processor	271	Tissue Flotation Water Bath
261	Manual Rotary Microtome	272	Slide Dryer(Hot Plate)
263	Semi-Automatic Microtome	273	Automated Tissue Stainer
264	Automatic Microtome	274	Paraffin Dispenser
265	Cryostat Microtome	275	Slides Cabinet
266	Tissue Embedding Center		

Consumables

Feather	Leica	808	E1	N1
Disposable Microtome Blade			Blade Holder	Blade Holder
120	16A	16B	18	19
Steel Knife	Disposable blade holder		Standard specimen clamp	Universal cassette clamp
35	07	36	15	14
Diamond lettering pen	Embedding frame	Disposable blade handle	Sharpening powder	Forceps
01	02	05	24	25
Tissue embedding cassette	Plastic cassette with cover	Embedding mold	Glass cover	Glass slide
26	30	28	27	23
Plastic slide basket	Tissue processing basket	Copper slide basket	Stainless steel slide basket	Slide staining vessel
11	10	20	13	08
Plastic slide storage box	Wooden slide storage box	Paraffin block	Slide mailer (5pcs/box)	Cryo-pin
38	21	31	32	33
Slide clamp	Color plastic tray	Harris、Eosin	Neuter balata	Cryo-embedding medium

Automated Tissue Processor



Features:

- * 5.5-inch large LCD touch screen, real-time display of equipment working status.
- * Automatic drying function, intelligent control of hot air system, good drying effect, energy saving and durability.
- * The dyeing processing method can be customized, which can meet the requirements of various dyeing methods, various users, and various specimens.
- * Fully enclosed structure, environmentally friendly efflux air purification system, efficient treatment of toxic and harmful gases.

Technical Parameters:

Model	BK-TS1B
Cup Number	12pcs (9pcs reagent cup, 3pcs paraffin cup)
Tissue Protective Cup	1~7th cup can be set
Single Cup Capacity	1100ml
Single Cup Processing Time	1 st cup:0~99h59min; other cups:0~23h59min
Agitation Frequency	0~6 times/min, adjustable
Dripping Time	0~59s, adjustable
Processing Basket Capacity	50pcs of dehydration cassette
Program Storage	8 sets
Noise	60dB(A)
Power	600W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
External Size(W*D*H)	1020*410*450mm
Package Size(W*D*H)	1130*560*640mm
Net Weight	63kg
Gross Weight	88kg



Features:

- * 5.5-inch large LCD touch screen, real-time display of the device working status
- * Rich man-machine dialogue interface, with online help function, easy to learn
- * Tank surface dripping time can be adjusted, reduce the chance of channeling, prolong the use of reagents, reduce pollution
- * Manual operation can be inserted at will, and automatically enter the original running state, convenient to check or add specimens during operation

Technical Parameters:

Model	BK-TS2B
Cup Number	12pcs (9pcs reagent cup, 3pcs paraffin cup)
Tissue Protective Cup	1~7th cup can be set
Single Cup Capacity	1800ml
Single Cup Processing Time	1 st cup:0~99h59min; other cups:0~23h59min
Agitation Frequency	0-6times/min, adjustable
Dripping Time	0-59s, adjustable
Processing Basket Capacity	100pcs of dehydration cassette
Program Storage	8 sets
Noise	60dB(A)
Power	600W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
External Size(W*D*H)	1135*465*490mm
Package Size(W*D*H)	1260*580*690mm
Net Weight	78kg
Gross Weight	102kg

Automated Tissue Processor

Introduction:

This automated tissue processor programmatically controls the immersion of human, animal, or plant tissue samples in solvents for standardized histological processing including dehydration, clearing, and paraffin infiltration as critical pre-analytical steps for pathological examination.

Features:

- * HD Touchscreen with Intuitive UI:Multi-language support, full real-time parameter display, and high-sensitivity touch operation.
- * Programmable Scheduling: Set start times for arbitrary time slots within a weekly cycle.
- * Power-Off Memory: Retains pre-interruption settings upon power restoration.
- * Delay-Start Heating: Energy-efficient operation enabled via smart temperature control.
- * Dual Activated Carbon Filtration: Effectively neutralizes exhaust odors, maintaining indoor air quality.
- * High-Throughput Processing: Handles ≥200 specimens/batch, enhancing diagnostic efficiency and data accuracy.

Technical Parameters:

Model	BK-TS4
Reagent Bottle Number	12 bottles (Bottles 1-10: Dehydration solvents; Bottle 14: Xylene; Bottle 15: Alcohol)
Single Bottle Capacity	3.5L
Single Reagent Processing Time	0~99h59min, adjustable
Paraffin Bath Number	3
Paraffin Bath Temperature	50~80°C, adjustable
Temperature Control Accuracy	±2°C
Processing Chamber Volume	4.4L
Sample Processing Capacity	≥200 samples/batch
Vacuum Pressure	<0.1 MPa
Noise	≤60dB(A)
Power Consumption	1000W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
Standard Accessories	Dehydration Basket *1; washing bottles*2; reagent bottles*10; activated carbon bottles*2
External Size(W*D*H)	685*640*1300mm
Package Size(W*D*H)	750*800*1500mm
Net Weight	120kg
Gross Weight	170kg



Introduction:

This automated tissue processor programmatically controls the immersion of human, animal, or plant tissue samples in solvents for standardized histological processing including dehydration, clearing, and paraffin infiltration as critical pre-analytical steps for pathological examination.

Features:

- * The device has a high-definition color LCD touch screen and is programmable for 20 routines, simplifying operation and monitoring.
- * It automates the entire process from sample transfer to dehydration, reducing manual work and enhancing efficiency.
- * With an organizational basket capacity of 100 embedding cassettes, it can be upgraded to a double-basket configuration, enabling processing of up to 200 cassettes.
- * Powered by a high-performance AC constant-speed motor, it ensures stable and quiet operation with high torque for accurate dehydration.
- * The permanent magnet synchronous motor facilitates thorough tissue-solvent and wax mixing, ensuring effective dehydration.
- * The wax tank features a digital constant-temperature control system with high precision and an electrode-oxidized inner surface for anti-pollution and corrosion resistance.
- * An activated carbon filter and exhaust system minimize air pollution, and a vacuum extraction device enhances tissue permeation and dehydration.

Technical Parameters:

Model	BK-TS6
Cup Number	12pcs (9pcs reagent cup, 3pcs paraffin cup)
Single Cup Capacity	2300ml
Single Cup Processing Time	0~99h59min
Single Paraffin Cup Capacity	1800ml
Agitation Frequency	5min/time
Dehydration Basket Size	Φ127*110mm
Dehydration Basket Capacity	100 cassettes
Program Storage	20sets
Noise	≤60dB(A)
Power Consumption	400W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
Standard Accessories	Dehydration Basket *1; reagent cups*9; paraffin cups*3; activated carbon bag*1
Optional Accessories	Dehydration Baskets *2
External Size(W*D*H)	Φ800*630~760mm
Package Size(W*D*H)	Main instrument: 940*940*820mm; Reagent bottle: 470*640*570mm
Net Weight	75kg
Gross Weight	Main instrument:100kg; Reagent bottle:32kg



Manual Rotary Microtome



- Features:**
- * Blades and wax blocks can be placed in the groove on the top of the cover, which is easy to use.
 - * Cross-roller guide rails to ensure long-lasting operation of the equipment.
 - * High-precision micro-feeding system to achieve stable and high-precision slicing.
 - * The wax block holder can be adjusted in any direction in three-dimensional space, which is easy and accurate to use.
 - * The right wheel turns and stops immediately, and can be locked at any position to ensure the safety and convenience of slicing.
 - * The counterweight design of the right runner makes slicing light and fast.
 - * Precise tool holder lateral movement function, the position of the same sample changes very little after changing the blade edge, the base of the tool holder has a scale, which is convenient for the positioning of the tool holder.
 - * The knife guard covers the full length of the blade to avoid the potential risk of injury during operation. When changing the blade, the ejector easily pushes the blade out and removes it safely.
 - * Large-capacity removable waste chute, easy to clean.

Technical Parameters:

Model	BK-2258
Sectioning Thickness Range	0~60μm
Trimming Thickness Range	0~60μm
Mini. Sectioning Thickness	0.5μm
Precision	±5%
Max Specimen Size	50*70mm
Specimen Stroke	Horizontal:28mm, vertical:52mm
Tool Holder Stroke	The maximum forward and backward movement of the tool holder base is 60mm, and the maximum left and right movement of the tool holder is 23mm.
Sample Adjustment Direction	Horizontal 8° Vertical 8° Rotation 360°
External Size(W*D*H)	570*470*300mm
Net Weight	29kg
Packing Size(W*D*H)	600*590*530mm
Gross Weight	42kg



- Introduction:**
- Microtome is used for sectioning thin and uniform tissue slices. The BK-2178 Microtome can section slices and trimmings between 0 and 60μm with a minimum adjustable index value of 0.5μm, which enables fast and accurate slicing operations. Equipped with a lengthening blade adapter and tool post to protect the safety of the operator and enable better tool retracting.
- Features:**
- * Precision cross-roller guide, equipped with stainless steel holder, to ensure long-lasting operation of the equipment.
 - * Equipped with multi-angle adjustment device, easy to use. (Optional embedding chuck)
 - * Magnetic removable waste chute, easy to clean.
 - * Two-piece storage board, which can place blade embedding box and other related disposable items.
 - * Large hand wheel double lock, and can be single-locked at any point, also double-locked at the highest point and any point, to ensure the safe exchange of knives and samples.

Technical Parameters:

Model	BK-2178
Sectioning Thickness Range	0~60μm
Trimming Thickness Range	0~60μm
Mini. Sectioning Thickness	0.5μm
Precision	±5%
Max Specimen Size	50*70mm
Specimen Stroke	Horizontal: 28mm, vertical: 52mm
Tool Holder Stroke	The maximum movement of the tool holder base is 60mm, and the maximum left and right movement of the tool holder is 23mm.
Sample Adjustment Direction	Horizontal 8° Vertical 8° Rotation 90°
External Size(W*D*H)	540*470*310mm
Net Weight	29kg
Packing Size(W*D*H)	660*590*600mm
Gross Weight	45kg

Semi-Automatic Microtome

Introduction:

Microtome is used for sectioning thin and uniform tissue slices. The BK-2238 Microtome can section slices between 0 and 100μm and and trimmings between 0 and 600μm with a minimum adjustable index value of 0.25μm, which enables fast and accurate slicing operations. Equipped with a lengthening blade adapter and tool post to protect the safety of the operator and enable better tool retracting.



Features:

- * Precision cross-roller guide, equipped with stainless steel holder, to ensure long-lasting operation of the equipment.
- * Equipped with multi-angle adjustment device and embedding chuck.
- * With sectioning/trimming, sectioning counting, retraction display(retraction range, feed travel of small hand wheel, feed direction of hand wheel) function.
- * Magnetic removable waste chute, easy to clean.
- * Two-piece storage board, which can place blade embedding box and other related disposable items.
- * Large hand wheel double lock, and can be single-locked at any point, also double-locked at the highest point and any point, to ensure the safe exchange of knives and samples.

Technical Parameters:

Model	BK-2238
Sectioning Thickness Range	0.25~100μm
Trimming Thickness Range	1~600μm
Retraction Range	0~200μm
Mini. Sectioning Thickness	0.25μm
Precision	±5%
Velocity of Small Hand Wheel	25μm, 50μm, 75μm, 100μm, 125μm
Max Specimen Size	70*70mm
Specimen Stroke	Horizontal: 28mm, vertical: 70mm
Tool Holder Stroke	The maximum movement of the tool holder base is 60mm, and the maximum left and right movement of the tool holder is 23mm.
Sample Adjustment Direction	Horizontal 8° Vertical 8° Rotation 90°
Power Supply	AC110/220V, 50/60Hz
Power	100W
External Size(W*D*H)	610*470*340mm
Net Weight	37kg
Packing Size(W*D*H)	730*590*590mm
Gross Weight	55kg

Automatic Microtome



Introduction:

Microtome is used for sectioning thin and uniform tissue slices. The BK-2228 Microtome can section slices between 0 and 100μm and and trimmings between 0 and 600μm with a minimum adjustable index value of 0.25μm, which enables fast and accurate slicing operations. Equipped with a lengthening blade adapter and tool post to protect the safety of the operator and enable better tool retracting.

Features:

- * Precision cross-roller guide, equipped with stainless steel holder, to ensure long-lasting operation of the equipment.
- * Equipped with multi-angle adjustment device, easy to use. (Optional embedding chuck)
- * Magnetic removable waste chute, easy to clean.
- * Two-piece storage board, which can place blade embedding box and other related disposable items.
- * Large hand wheel double lock, and can be single-locked at any point, also double-locked at the highest point and any point, to ensure the safe exchange of knives and samples.

Technical Parameters:

Model	BK-2228
Sectioning Thickness Range	0.25~100μm
Trimming Thickness Range	1~600μm
Retraction Range	0~200μm
Mini. Sectioning Thickness	0.25μm
Automatic Sectioning Speed	35~140pcs/min
Precision	±5%
Max Specimen Size	70*70mm
Specimen Stroke	Horizontal: 28mm, vertical: 70mm
Tool Holder Stroke	The maximum movement of the tool holder base is 60mm, and the maximum left and right movement of the tool holder is 23mm.
Sample Adjustment Direction	Horizontal 8° Vertical 8° Rotation 90°
Power Supply	AC110/220V, 50/60Hz
Power	150W
External Size(W*D*H)	500*470*340mm
Net Weight	45kg
Packing Size(W*D*H)	730*620*590mm
Gross Weight	65kg

Cryostat Microtome

Applications:

It is an essential product for rapid sectioning of pathological tissues, and is mainly suitable for quick frozen sectioning in large, medium and small hospitals, medical colleges, research institutes, animal husbandry, histology, pathology, forensic identification, etc.



Features:

- * This machine adopts a more reasonable structural design suitable for scientific research, clinical, large, medium, small, and hospital pathological frozen sections.
- * Four key cooling points are designed, all of which can be automatically adjusted according to the temperature required for slicing to ensure the speed and quality of slicing.
- * The mechanical parts of the slicer are all made of high-quality materials, precision processed and assembled, and the core is a closed structure, free of maintenance.
- * Knife feeding and retracting are electric control.
- * There is no need to turn on day and night, no need to pre-cool, and it will enter the frozen state within ten minutes after turning on.
- * The trimming thickness and slice thickness can be set by yourself.
- * It has two functions of automatic defrosting and manual defrosting.
- * Editing and slicing can be freely converted.
- * It has lighting and ultraviolet disinfection functions, and the freezer is equipped with a water pipe, which is convenient for cleaning.

Technical Parameters:

Model	BK-2328
Section Thickness Range	1~100μm
Trimming Thickness Range	10~400μm
Retraction Range	0~200μm
Chamber Temp. Range	-10℃ to -40℃
Specimen Head Temp. Range	-10℃ to -40℃
Time to The Lowest Temperature	60min
Lowest Temp. of Refrigerating Table	-45℃
Lowest Temp. of Refrigerating Table with Peltier Refrigeration	-60℃
Max Specimen Size	φ55mm
Specimen Vertical Stroke	60mm
Specimen Horizontal Stroke	20mm
Electric Coarse Feed	Rapid 0.7mm/s, slow 0.35mm/s
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
Power	1500W
External Size(W*D*H)	770*840*1190mm
Packing Size(W*D*H)	860*930*1400mm
Net Weight	160kg
Gross Weight	198kg

Tissue Embedding Center

Features:

- * Fully automatic program control, can be preset to start on any day within a week
- * The temperature control adopts a single-chip microprocessor controller, and the temperature setting is simple
- * Using a new type of heating element, fast heating, uniform heating, energy saving and reliable
- * Double overheating protection device, safe and reliable
- * With memory function, automatically retain the preset temperature after operation
- * Novel appearance, split design, embedding machine, freezing table, random combination
- * Enlarging the left and right boxes, suitable for all kinds of dehydration baskets, the inner and outer boxes are separated, easy to clean and maintain
- * Equipped with a metal hose magnifying glass, it is suitable for very small sample tissue operations



Technical Parameters:

Model	BK-TEV
Thermal Temperature Range	RT~80℃
Control Temperature Precision	±3℃
Timing Range	0~24h
Paraffin Chamber Size	650*130*97mm
Thermal Storage Size	240*240*57mm, two pcs
Working Area Size	700*93mm
Pre-Cooling Table Size	69*59mm
Power	≤1400W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
External Size(W*D*H)	735*693*413mm
Net Weight	45kg
Packing Size(W*D*H)	880*850*650mm
Gross Weight	72kg

Tissue Cooling Center

Features:

- * Environmentally friendly fluorine-free refrigerant is selected, with low noise and fast cooling effect
- * The temperature control adopts a single-chip microprocessor controller, and the temperature setting is simple
- * With temperature control mode and super cooling mode, high temperature control accuracy
- * The cooling temperature can be adjusted to achieve the ideal cooling effect



Technical Parameters:

Model	BK-CPIV
Temperature Control Range	5 to -20℃(Max to -28℃)
Control Temperature Precision	±1℃
Working Area Size	360*300mm
Number of Embedding Cassettes	50pcs
Power	300W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
External Size(W*D*H)	350*630*400mm
Net Weight	23kg
Packing Size(W*D*H)	500*800*590mm
Gross Weight	43kg

Remark: The above two products should be used together.

Tissue Embedding Center



Features:

- * Fully automatic program control, can be preset to start any day within a week.
- * The temperature control adopts a single-chip microprocessor controller, and the temperature setting is simple.
- * Using a new type of heating element, the heating is fast, the heating is uniform, and the energy saving is reliable.
- * Equipped with a small cooling platform, the base mold paraffin can be quickly pre-cooled.

Technical Parameters:

Model	BK-TEI
Thermal Temperature Range	RT~80℃
Control Temperature Precision	±3℃
Timing Range	0~24h
Paraffin Chamber Size	350*145*80mm
Thermal Storage Size	205*145*60mm, two pcs
Working Area Size	500*145mm
Power	1100W
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 60Hz(Optional)
External Size(W*D*H)	525*550*500mm
Net Weight	36kg
Packing Size(W*D*H)	650*660*660mm
Gross Weight	43kg

Tissue Flotation Water Bath &Slide Dryer



Applications:

It is suitable for medical diagnosis, biological research, epidemic prevention, forensic identification.

Features:

- * Integrating spreading, baking and roasting slices in one, compact structure (small space occupation), novel shape and easy operation.
- * The film drying box can dry the film at a constant temperature and can accommodate 3 dyeing racks.
- * The louver-style grilling table top has a large capacity (60 slides are actually arranged), easy to put and take out, and the grilling effect is better.
- * High-brightness LCD display, real-time display of sheet spreading and drying sheet temperature, simple and clear.
- * Highly sensitive temperature control integrated unit, high precision and reliable performance.
- * With over-temperature alarm function.
- * Using new heating software, fast heating, uniform heating, small thermal inertia, reliable energy saving.
- * With memory function, automatically retain the set temperature after operation.
- * The work surface is spray-coated, corrosion-resistant.

Technical Parameters:

Model	BTH-VI
Temperature Range	RT~99℃
Temperature Precision	±1℃
Over Temperature Alarm Range	1~5℃
Water Tank Size	220*150mm*65mm
Drying Plate Size	260*150mm
Oven Size	200*100*110mm
Power	≤680W
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 60Hz(Optional)
External Size(W*D*H)	590*340*225mm
Package Size(W*D*H)	670*430*260mm
Net Weight	12kg
Gross Weight	13.5kg

Tissue Flotation Water Bath & Slide Dryer



Applications:



Medical Diagnosis



Biological Research



Epidemic Prevention



Forensic Identification

Features:

- * It integrates spreading and drying, compact structure (small footprint), novel shape and easy operation.
- * The louver-type drying table has a large capacity (actually arranges 60 slides), is easy to put and take out, and has a better drying effect.
- * High-brightness LCD display, real-time display of sheet spreading and drying sheet temperature, simple and clear.
- * Highly sensitive temperature control integrated unit, high precision and reliable performance.
- * With over-temperature alarm function.
- * Using new heating software, fast heating, uniform heating, small thermal inertia, reliable energy saving.
- * With memory function, automatically retain the set temperature after operation.
- * The work surface is spray-coated, corrosion-resistant.

Technical Parameters:

Model	BTH-V
Temperature Range	RT~99℃
Temperature Precision	±1℃
Over Temperature Alarm Range	1~5℃
Water Tank Size	220*150*65mm
Drying Plate Size	260*150mm
Power	≤450W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
External Size(W*D*H)	500*330*140mm
Package Size(W*D*H)	780*490*300mm
Net Weight	10kg
Gross Weight	12kg



Features:

- * Integrate tissue flotation water bath and slide dryer, compact structure and easy operation
- * High-brightness LCD display, real-time display of temperature.
- * Highly sensitive temperature control integrated unit, high precision and reliable performance.
- * With over-temperature alarm function
- * Using new heating materials, heating fast, uniform heating, low thermal inertia, energy saving and reliable.
- * With memory function. The set temperature is automatically retained.
- * Louver-type drying table, easy to operate, better drying effect
- * The work surface is sprayed for corrosion resistance.

Technical Parameters:

Model	BTH-I
Temp. Range	RT~99℃
Temp. Precision	±1℃
Environmental Temp. Range	0~40℃
Over-Temp. Alarm Range	1~5℃
Drying Area	344*260mm
Bath Tank Size(W*D*H)	304*207*52mm
Display	LCD
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
Consumption	600W
External Size(W*D*H)	695*400*210mm
Package Size(W*D*H)	780*490*300mm
Net Weight	15kg
Gross Weight	17kg

Tissue Flotation Water Bath



Features:

- * High-brightness LCD display, real-time display of temperature.
- * Highly sensitive temperature control integrated unit, high precision and reliable performance.
- * With over-temperature alarm function
- * Using new heating materials, heating fast, uniform heating, low thermal inertia, energy saving and reliable.
- * With memory function. The set temperature is automatically retained.
- * The work surface is sprayed for corrosion resistance.

Technical Parameters:

Model	BT-I
Temp. Range	RT~99℃
Temp. Precision	±1℃
Over-temp. Alarm Range	1~5℃
Environmental Temp. Range	0~40℃
Bath tank Size(W*D*H)	240*180*55mm
Display	LCD
Power Supply	AC220V±10%, 50/60Hz(Standard); AC110V±10%, 60Hz(Optional)
Consumption	200W
External Size(W*D*H)	345*340*130mm
Package Size(W*D*H)	410*410*200mm
Net Weight	6kg
Gross Weight	7.5kg

Slide Dryer (Hot Plate)



BH-I



BH-II

Features:

- * High-brightness LCD display, real-time display of temperature.
- * Highly sensitive temperature control integrated unit, high precision and reliable performance.
- * With over-temperature alarm function
- * Using new heating materials, heating fast, uniform heating, low thermal inertia, energy saving and reliable.
- * With memory function. The set temperature is automatically retained.
- * The work surface is sprayed for corrosion resistance.
- * Louver table, 65°inclination Angle, large capacity. (Only for BH-II)

Technical Parameters:

Model	BH-I	BH-II
Temp. Range	RT~99℃	
Temp. Precision	±1℃	
Environmental Temp. Range	0~40℃	
Over-temp. Alarm Range	1~5℃	
Drying Area	345*260mm	
Number of Slides	40	65
Display	LCD	
Power Supply	AC220V±10%, 50/60Hz(Standard); AC110V±10%, 60Hz(Optional)	
Consumption	200W	
External Size(W*D*H)	345*340*130mm	
Package Size(W*D*H)	410*410*200mm	
Net Weight	6kg	
Gross Weight	7.5kg	

Automated Tissue Stainer



Features:

- * 5.5-inch large LCD touch screen, real-time display of equipment working status.
- * Automatic drying function, intelligent control of hot air system, good drying effect, energy saving and durability.
- * The dyeing processing method can be customized, which can meet the requirements of various dyeing methods, various users, and various specimens.
- * Fully enclosed structure, environmentally friendly efflux air purification system, efficient treatment of toxic and harmful gases.

Technical Parameters:

Model	BK-RS1A
Cup Number	14pcs (1st is drying cup, 8th is washing cup)
Single Cup Capacity	1200ml
Each Cup Processing Time	0-59min
Dripping Time	0-30s
Slides Capacity	72pcs
Program Storage	8 sets
Noise	60dB(A)
Power	1000W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
External Size(W*D*H)	1200*480*450mm
Package Size(W*D*H)	1250*510*530mm
Net Weight	72kg
Gross Weight	102kg

Introduction:

BK-RS3 automatic tissue stainer, composed of a sample transfer system and a staining system, automates sample processing. Samples on glass slides are sequentially processed in designated tanks, achieving automatic washing, staining, and drying, with real-time operational data display for timely operator control. It's widely used in histology, pathology, and biology for automatic staining of paraffin and frozen sections on glass slides.



Features:

- * With a high-definition color LCD touch screen that switches between Chinese and English interfaces easily.
- * Equipped with stain quality control and an AAT function to adjust staining time based on usage, ensuring consistent results.
- * Offers audio-visual alerts and automatic screen/LED light control.
- * Supports multiple staining methods (e.g., HE, Pap), programs, and an open reagent system.
- * USB Port: Enables easy file upgrades and data export.
- * Program-controlled to prevent specimen damage, with infrared detection for operation guidance.
- * Automatically adjusts water supply during operation, with a rear water pressure valve for cleaning needs.
- * Fully automated from sample transfer to staining and washing, enhancing work efficiency.
- * Processes up to 600 slides/hour, with a 30-rack capacity and support for 15 concurrent programs.
- * Hydrophobic racks reduce reagent carry-over and cross-contamination, with a tank shaking function to minimize residue.
- * Monitors exhaust and includes activated carbon filtration to reduce air pollution.

Technical Parameters:

Model	BK-RS3
Cup Number	26
Reagent Stations	19
Washing Stations	4
Oven Chamber	1
Single Cup Capacity	380ml
Single Cup Processing Time	0~59min59s
Oven Temperature Range	RT~70℃
Loading Capacity	Up to 15 staining racks
Slides per Rack	30
Loading/Unloading Stations	1/1
Programs Storage	15
Noise	≤60dB(A)
Consumption	400W
Power Supply	AC220V,50/60Hz(Standard); AC110V, 60Hz(Optional)
Standard Accessories	Reagent cups*19; washing cups*4; staining racks*10; inlet pipe assembly*1; PVC water pipe 4m; ventilation pipe*1; activated carbon filter*1
External Size(W*D*H)	1200*640*600mm
Package Size(W*D*H)	1350*780*830mm
Net Weight	110kg
Gross Weight	140kg

Paraffin Dispenser




Features:

- * The LCD screen displays the heating status.
- * Adopt new heating element, heating fast, energy saving and reliable.
- * Paraffin valve intelligent control heating control, to ensure smooth wax.
- * Imported temperature measuring integrated block, high precision, stable performance.
- * With memory and automatic recovery function, automatically save preset temperature after running.
- * Full computer automatic control program, intelligent digital temperature controller, real-time temperature display.

Technical Parameters:

Model	BK-RLY
Capacity	12L
Temp. Range	RT~100℃
Temp. Precision	±1℃
Consumption	1000W
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz
External Size(W*D*H)	330*430*550mm
Net Weight	14kg
Packing Size(W*D*H)	440*560*730mm
Gross Weight	29kg

Slides Cabinet

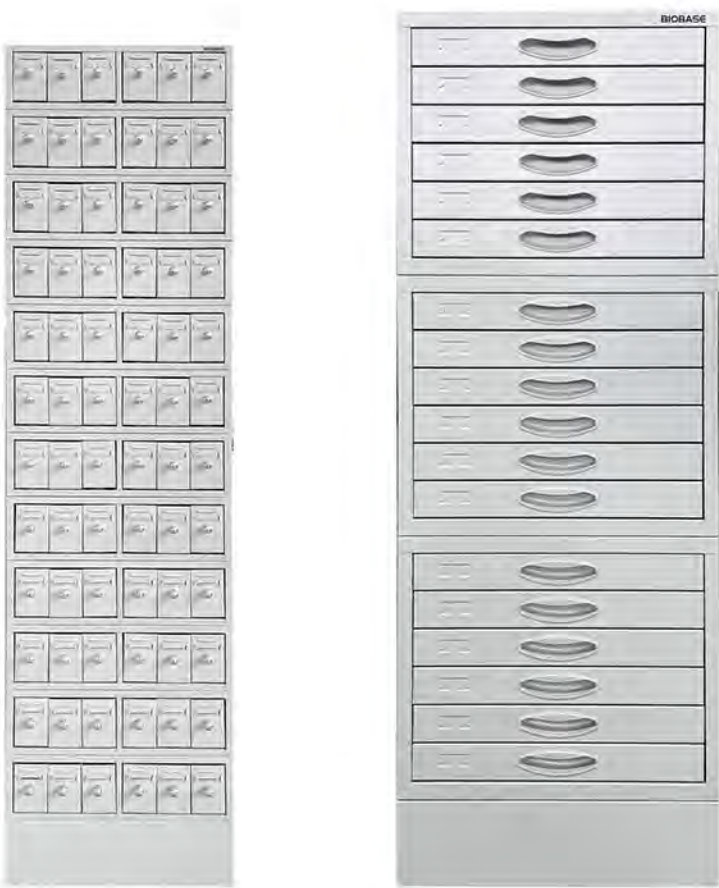

BKC-E1-1

BKC-E2-1/E3

Technical Parameters:

Model	BKC-E1-1	BKC-E2-1	BKC-E3
Capacity	72 drawers Loading: 64800pcs glass slides	18 drawers Loading: 12000pcs paraffin block	18 drawers Loading: 9000pcs glass slides
Material	Cabinet	Cold-rolled steel plate Surface treatment: degreasing and oil removal, surface conditioning, zinc-based phosphating, passivation, powder coating	
	Drawer	Cold-rolled steel plate	
	Slot	Special slot for metal die opening	
	Marking Groove	Integral stamping forming	
External Size(W*D*H)	403*478*1625mm	450*478*1295mm	
Package Size(W*D*H)	470*550*430mm*3 470*550*555mm*1	505*535*445mm*2 505*535*570mm*1	
Net Weight	21.6kg*3	22.2kg*2	20.5kg*2
	23.52kg*1	24.21kg*1	22.51kg*1
Gross Weight	23.26kg*3	23.38kg*2	22.21kg*2
	25.18kg*1	24.24kg*1	24.22kg*1

Blood Bank Instrument
Blood Collection Chair

Features:

- * Manual or electric control type for your choice.
- * Made of high-strength fiber material and poly-layer paint, more durable, easy to clean.
- * Designed with people-oriented idea, to meet the donor's sense of security and comfort, to alleviate the psychological pressure, to ensure an easier and enjoyable process.
- * Mattress using a high-quality medical polyurethane foam molding leather, easy for clean and maintenance, anti-static and anti-fouling properties superior to other similar products.



Technical Parameters:

Model	BK-BC100	BK-BC100A
Seat Section Size(mm)	1800*580	
Seat Section Height(mm)	480	
Backing Board Turning Angle	0~70°	
Chair Backward and Forward Tilt Angle	8°~15°	
Leg Plate Turning Angle	0~90°	
Handrail Swing Out Angle	0°~45°	
Handrail's Moving Distance	100mm	
Handrail Board Size	500*160mm	
Lifting Speed	/	3~25mm/s
Power Supply	/	AC110/220V±10%, 50/60Hz
Reading Lamp Power	/	60W
Standard Accessories	Hand operation, handrail rack, small table	
Optional Accessories	LED hose-type reading lamp; movable assistant desk; soft velvet cover	
Load Capacity	220kg	
Packing Size(W*D*H)	1500*780*600mm	
Gross Weight	65kg	75kg

Blood Collection Monitor



BCM-4



BCM-12Z

Introduction:

Blood collection monitor has the functions of weighing, zero point calibration, fluid collection control, oscillation and so on. It is an ideal equipment for blood collection, which is suitable for blood centers, blood stations, hospitals and other blood collection and supply units.

Features:

- * Microcomputer control is adopted to realize the integration of weighing and collecting liquid.
- * Built-in large capacity lithium battery, long battery life.
- * With automatic sound and light alarm function, when the amount of liquid reaches the predetermined value or the predetermined time, the alarm prompts.
- * The gentle swing mode is safer for platelets and red blood cells that are easily damaged in the blood.
- * Using new type of weighing sensor, weighing more accurate.
- * Constant speed motor, low noise, long service life.
- * The liquid collection digital display is displayed in milliliters without calculation and conversion, which is more convenient and convenient to use.

Technical Parameters:

Model	BCM-4	BCM-12Z
Measuring Range	0~1200ml	0~1200ml
Display	LED	3.5-inch color LCD touch screen
Resolution	1ml	
Liquid Proportion	1.05g/ml	
Collection Speed	0.5-3ml/s	
Static Error	±2g	
Swing Angle	13±2°	
Swing Frequency	30±2r/min	
Alarm	Collection finish, Automatic sound and light dual alarm	Collection finish, Automatic sound and light dual alarm; Clamp obstruction
Obstruct Pipeline	/	Outer diameter φ3 ~ φ6mm, wall thickness: 0.5mm
Obstruct Resistance	/	<14N
Ambient Temperature	5°C~40°C	
Battery	Lithium battery, 12V, 5000mAh, 3 hours of battery life	/
Consumption	17W	30W
Power Supply	100~240V, 50/60Hz	
External Size(W*D*H)	190*240*165mm	285*240*190mm
Net Weight	2.5kg	3.5kg
Packing Size(W*D*H)	380*260*290mm	
Gross Weight	3.5kg	5.5kg

Smart Weighing Instrument For Blood Collection



BCM-12A



BCM-12B

Features:

- * Unique modern sensor and LED display.
- * Preset volume of blood collection function.
- * Taring and calibrating function, ensure measuring accuracy.
- * Soft shaking mode, improving the survival of effective components in the blood.
- * Shaking auto stops when bags are taken away during collection and restart working after bags are remounted.
- * If collection volume is preset, the balance will stop shaking when there is 10ml gap and get into accurate measuring status.
- * Automatic alarm when reaching the preset value.
- * Humanization design and reasonable structure is convenient for operation.

Technical Parameters:

Model	BCM-12A	BCM-12B
Measuring Range	0~1200ml	
Measuring Accuracy	2%	
Display Accuracy	1ml	
Liquid Proportion	1.05g/ml	
Collection Speed	0.5~3ml/s	
Swing Frequency	30~32 r/min	
Swing Angle	13±2°	
Alarm	Audio and visual alarm	Audio and visual alarm with interrupter
Interrupter Thrust	/	≤14N
Consumption	12W	40W
Power Supply	AC110/220V±10%, 50/60Hz	
External Size(W*D*H)	218*172*160mm	275*230*210mm
Packing Size(W*D*H)	310*260*210mm	330*280*260mm
Net/Gross Weight	2.8kg/3.5kg	4.2kg/5.5kg

Blood Collection Monitor



Features:

- * 7.0 inch HD IPS touch screen, Chinese and English guided graphic operation interface, easy to complete blood collection.
- * The screen also displays the blood collection weight and volume.
- * Microcomputer program control, automatic clamping line, accurate collection of blood volume.
- * There is an alarm when the flow rate is too high and too low, and the flow rate range can be set.
- * Real-time display of blood collection progress and completion.
- * According to the blood collection volume requirements, the corresponding collection preset value can be quickly selected.
- * Automatically record and store up to 999 pieces of collected data, which can be exported and stored in a computer to achieve data information management.
- * Standard of scanning gun.

Technical Parameters:

Model	BCM-12C
Measuring Range	20~1200ml
Preset 4 Gears Collection Presets	100ml
	200ml
	300ml
	400ml
Display	7.0-inch HD IPS touch screen
Resolution	1ml
Liquid Proportion	1.05g/ml
Collection Speed	0.5~3ml/s
Static Error	±1%
Swing Angle	13±2°
Swing Frequency	30~32r/min
Alarm	Buzzer alarm sound
Obstruct Pipeline	Outer diameter φ3~φ6mm, wall thickness: 0.5mm
Obstruct Resistance	≥14N
Ambient Temperature	0~40℃, relative humidity less than 85%
Consumption	50W
Power Supply	AC110/220V±10%, 50/60Hz
External Size(W*D*H)	380*220*150mm
Net Weight	5.2kg
Packing Size(W*D*H)	470*300*250mm
Gross Weight	7kg

Handheld Blood Bag Tube Sealer



Introduction:

High-frequency electron tube self-excited high-frequency oscillation instants to generate high-frequency electromagnetic field, so that the plastic internal polar molecules polarization and friction with each other to produce heat phenomenon, and then achieve the purpose of welding plastic, the welding temperature is uniform. It is applied to the sealed heat sealing of the catheters of medical PVC blood collection bags. It is mainly suitable for the blood transfusion departments of hospitals at all levels, the body collection departments and component departments of blood stations, blood banks as well as medical scientific research institutions.

Features:

- * Equipped with a transistor high-frequency generator and filtering-shielding design, it emits minimal radiation.
- * Boasting multiple voltage safeguards, a stable circuit, it ensures long-term use.
- * The heat-sealing process is fully automated, eliminating the need for manual time adjustment.
- * With a user-friendly design, it's compact, lightweight, portable, and easy to operate.
- * No preheating required. It can seal rapidly, ideal for mobile blood collection tubes.
- * The heat-sealing head has a pre-set groove-shaped cut, allowing easy separation by hand post-sealing.
- * Fitted with a reliable anti-splash protector, it's easy to clean.
- * Its wrapped heat-sealing head design provides a flat seal, preventing hemolysis.
- * With a wide-voltage design, it's compatible with global power supplies and can be paired with various standard plugs.
- * Featuring a high-security rechargeable battery, long-distance transport is worry-free.
- * It can operate with or without an external power source, making it perfect for mobile emergency scenarios.

Technical Parameters:

Model	BK-HS01
Radio Frequency Output	40.68MHz±10KHz
Sealing Radio Frequency (RF) Consumption	30W
Battery	24V, 4000mAH
Number of Heat Sealings	It takes 3 hours to fully charge the battery, and it can perform 800~1000 heat sealings (depending on the ambient temperature).
Sealing Type	Automatic
Sealing Time	1~2.5s
Suitable Materials	PE or PVC, with an outer diameter of 2~7mm and a wall thickness of ≤1.5mm
Power Supply	Input: AC100~240V, 50Hz/60Hz, 0.7A; Output: DC 24V
Consumption	Working: 150W; Standby: 3W
Components	Heat sealing handle + control box
Standard Accessories	Canvas portable bag, 2-meter-long connecting cable, charger
External Size(W*D*H)mm	145*205*55
Packing Size(W*D*H)mm	215*315*115
Net Weight(kg)	2
Gross Weight(kg)	4

Blood Bag Tube Sealer



BJPX-PR

BJPX-PR-II

Features:

- * Fast response, instant heat sealing.
- * Status indicator light for easy monitoring of machine operation.
- * Automatic heat sealing for more convenient operation.
- * A carefully designed heat dissipation structure effectively reduces chamber temperature, ensuring long-term continuous operation.
- * Unique high-frequency protection design ensures safe use.
- * Suitable for pipes with a maximum diameter of 6mm, precise heat sealing time control ensures uniform seal thickness.
- * White safety cover is easily removed and cleaned without special tools.
- * Spark protection prevents sparks from damaging samples during operation.

Technical Parameters:

Model	BJPX-PR	BJPX-PR-II
Heat Sealing Method	Automatic heat sealing	
Voltage Regulation	Manual pressure regulation with 3 adjustable levels	Automatic pressure regulation
Applicable Tube Diameter (mm)	Infusion tube with an outer diameter of φ3~φ6, δ≤1 (wall thickness)	
Heat Sealing Time	1~4s (Manual adjustment)	0.1~9.9s (Automatic adjustment)
Rated Power	≤360W	
Power Supply	Standard: AC220V 50/60Hz; optional: AC110V 50/60Hz, external transformer	AC220V 50/60Hz; AC110 50/60Hz, these two voltages can be switched.
Product Size	352*172*240mm	380*180*170mm
Net Weight	6.6kg	8kg
Packing Size	430*240*290mm	430*240*290mm
Gross Weight	7.7kg	10kg



Features:

- * Ceramic-coated metal heat-sealing head for rapid heat sealing.
- * Easy-tear seam at the heat-sealed joint for easy separation.
- * Automatically identifies different pipe thicknesses, facilitating heat sealing of various pipe profiles.
- * Safe and effective splash protection device; easy to disassemble and clean.
- * Different status indicator lights monitor usage status in real time.
- * Built-in measuring tape for easy visual measurement of heat-sealed pipe length.

Technical Parameters:

Model	BK-TH10
RF Source Type	High-frequency transistor
Power Regulation	External rotating five-speed adjustment
Applicable Tube Diameter (mm)	Outer diameter of φ2~φ6.2, δ≤1 (wall thickness)
Heat Sealing Time	0.5~2s
Triggering Method	Mechanical trigger
Splash Guard	Yes
Working Indicator	LED light
Power	≤250W during operation, ≤10W during standby
Power Supply	AC90~264V 50/60Hz
Product Size(W*D*H)	165*305*155mm
Net Weight	5kg
Packing Size(W*D*H)	245*365*210mm
Gross Weight	6.5kg

Blood Bag Tube Sealer



BK-HSI



BK-HSII

Feature:

- * Microcontroller control, instrument control programmed, instrument automatically adjusts voltage.
- * Heat sealing without hemolysis, using imported components to ensure instrument reliability.
- * The machine feet have suction cups, suitable for use in blood collection vehicles.
- * Automatic heat sealing tube, firmly sealed, easy to separate at the heat sealing point.
- * Splash protection: transparent splash protection film to prevent blood from splashing into the operator's eyes during hot sealing, ensuring the safety of operators.
- * Convenient cleaning: The white safety cover allows for easy disassembly and cleaning without the need for specialized tools.
- * Heat sealing voltage: automatic voltage regulation.

Technical Parameters:

Model	BK-HSI	BK-HSII
Material	aluminium alloy	stainless steel
Output Voltage	automatic voltage regulation	
Sealing Type	automatic heat sealing	
Sealing Time	0.1-9.9 seconds	
Tube Size	plastic pipe with an outer diameter of 4mm and a wall thickness of ≤ 1mm	
Power Supply	AC220V, 50Hz	
External Size(L*W*H)(mm)	300*200*160mm	300*180*150mm
Packing Size(L*W*H)(mm)	470*320*260mm	
Net Weight(kg)	8kg	7kg
Gross Weight(kg)	9kg	8kg

Blood Bag Tube Sealer



Application:

The blood bag tube sealer is a compact equipment to seal the blood bags, infusion bags, urine bags by high frequency sealing system. It's widely used in blood-bank, hospital, biological industry, etc.

Features:

- * No hemolysis.
- * With suction feet to avoid moving, can be used in blood collecting vehicle.

Technical Parameters:

Model	BK-BTS1
Sealing time	2~4s
Sealing type	Automatic
Diameter of tube	Ø2-6mm (tube wall thickness≤1.5mm)
Power Supply	AC110V~260V, 0.7A
Consumption	150W
External Size (W*D*H)	320*180*130mm
Package Size (W*D*H)	430*235*235mm
Net/Gross Weight	7kg

Blood Plasma Extractor



Applications:

It is used to extract blood components from centrifuge bags. It is widely used in hospitals, blood stations, etc. After the plasma in the blood bag is stratified, the pressure of the plasma extractor can squeeze out different components of the blood from top to bottom.

Features:

- * Manual separation, easy to operate.
- * Using a transparent splint, it is easy to observe the separation of plasma and red blood cells.
- * The body is made of 304 brushed stainless steel, which is beautiful and easy to clean and disinfect.

Technical Parameters:

Model	BJPX-FJ
Body Material	Stainless Steel
Clamping Force	≥20N
Applicable Blood Bag	100ml,200ml,300ml,400ml
Net Weight	2.5kg
External Size	170*280*250mm
Packing Size	380*260*290mm
Gross Weight	3.5kg

Blood Thaw Machine

Introduction:

Blood Thaw Machine is suitable for blood centers, clinical transfusion departments, hospitals, blood products production units, using microcomputer control, temperature digital display, arbitrary setting, automatic constant temperature, swing function. Widely used for the rapid melting of frozen blood components and biological products. Applicable to hospital blood testing department, blood centers, blood banks and other industries.



Features:

- * High definition touch screen, sensitive operation.
- * Real-time temperature curve display.
- * Traceability management system, real-time record storage temperature data in the melting process.
- * A variety of thawing modes are available to adapt to thawing and rewarming of frozen plasma, platelets and blood products with different volumes.
- * Double circulation system, more constant temperature in the melting process, effectively eliminate the precipitation of fibrin, protect the active components of plasma.
- * Disintegrated water tank, convenient for regular deep cleaning and disinfection of equipment.
- * Equipped with a code scanning device, which can scan and record the thawing data of each bag of plasma, including thawing start and end date, time, and temperature data information during thawing.(Optional)
- * Standby automatic water refill, one key cleaning function, with temperature and water level protection function. (Only for BJPX-PT12 and BJPX-PT24)
- * Dual use of one machine to realize the fast switching between dry and wet thawing. (Only for optional isolated water type)
- * The waterproof bag is made of medical composite material, which ensures the thermal conductivity of the thawing bag and the contact area between the thawing bag and the plasma bag. (Only for optional isolated water type)

Technical Parameters:

Model	BJPX-PT6	BJPX-PT12	BJPX-PT24
Thawing Type	Standard: Water bath type Optional: Isolated water type		
Temp. Range	37.0±3.0℃		
Temp. Resolution	±0.1℃		
Water Storage Capacity	20kg±5%	58kg±5%	98kg±5%
Max Thawing Quantity	6pcs	12pcs	24pcs
Thawing Time	10~15min		
Ambient Temp.	18℃~30℃		
Consumption	1000VA	2000VA	3600VA
Power Supply	AC220V 50/60Hz		
External Size	550*500*470mm	600*540*970mm	720*600*990mm
Package Size	670*620*695mm	744*714*1200mm	860*745*1210mm
Net Weight	25kg	55kg	80kg
Gross Weight	42kg	75kg	105kg



Introduction:

BJPX-PT8 is suitable for blood centers, clinical transfusion departments, hospitals, blood products production units, using microcomputer control, temperature digital display, arbitrary setting, automatic constant temperature, swing function. It is widely used for the rapid melting of frozen blood components and biological products.

Features:

- * Special shape design of main control panel, easy to observe, control, ergonomic.
- * Microcomputer PID precision temperature control technology, high temperature control precision.
- * Digital display temperature, swing frequency, time.
- * The liner is made of high quality rust-proof wire drawing stainless steel.
- * Configuration of leakage current, overvoltage protector.
- * With overtemperature alarm, the temperature in the box exceeds the set temperature 1℃ will start the alarm.
- * Independent overtemperature control system design, with double protection function, to ensure the safety of use.

Technical Parameters:

Model	BJPX-PT8
Display	Touch screen
Temp. Range	37.0±1℃
Temp. Resolution	±0.1℃
Thawing Quantity	3 layers(1~12pcs)
Swing Frequency	60±5 times/min or Automatic frequency modulation
Swing Mode	Continuous left and right reciprocating, horizontal swing
Ambient Temp.	18℃~30℃
Power Supply	AC220±22V, 50/60Hz/ 2100VA
Internal Size	298*238*233mm
External Size	832*558*498mm
Package Size	935*665*665mm
Net Weight	60kg
Gross Weight	80kg

Note: The relevant data were measured when the ambient temperature was 25℃ and the relative humidity was less than 85%.

Hemocytometer



Introduction:

Hemocytometer is a microcomputer binary-decade 12-group counter integrated with counting, analysis and monitoring, which can simultaneously display twelve groups of data and totals, accurate and reliable, to meet the need of manual counting of clinical blood routine, especially fits for the small and middle size hospitals.

Features:

The instrument corresponds to the common eight kinds of blood cell on the eight counting keys, such as neutrophilic segmented granulocyte(NSG), lymphocyte(LYM), monocytes(MONO), eosinophil(E), basophil(B), neutrophil(NEU), myeloid, metamyelocyte. If the above eight kinds of blood cell need counting, you can directly press the corresponding count key to count.

Technical Parameters:

Model	BK-CC10
Function	Cell count and percentage calculation
Maximum Count Category	12 groups
Count Capacity of Every Group	0~99
Count Capacity of Total	0-9999
Display	LED
Button Sound	Yes
Power Supply	100-240VAC, 50Hz/60Hz
Power	5W
External Size(W*D*H)	178*135*60mm
Package Size(W*D*H)	300*200*150mm
Net Weight	0.25kg
Gross Weight	0.7kg

Platelet Agitator



Introduction:

The main working principle of the platelet agitator is to utilize oscillation to enhance platelet function, prompting platelets to release more active substances and growth factors, thereby promoting platelet aggregation and adhesion.

Features:

- * Mold-injected tray with a smooth, burr-free surface to effectively protect blood bags.
- * LCD screen displays the operating speed of the equipment.
- * Equipped with an AC servo motor for smooth operation.
- * Uses a speed-adjustable motor for quiet and stable performance.
- * Stainless steel frame with an easy-to-clean surface.

Technical Parameters:

Model	BPA-SD08
Layer Count	8
Layer Capacity	2*200ml
Oscillation Amplitude	35mm
Oscillation Frequency	60 oscillations per minute
Operation Mode	Reciprocating left and right, horizontal oscillation
Timing Range	0~9999min
Power Supply	AC100~240V 50/60Hz
Single-layer Size(W*D*H)	400*280*40mm
External Size(W*D*H)	423*330*502mm
Package Size(W*D*H)	534*439*650mm
Net Weight	25kg
Gross Weight	33kg

Blood and Fluid Warmer



BK-TW201



BK-TW101



BK-TW102

Introduction:

By heating the continuous flow of liquid, the heat in the heat exchanger is transferred to the liquid in the pipe through the extended infusion pipeline to achieve the purpose of heating the liquid. The product is not in contact with the liquid. It is not used for the heating of analgesics, chemotherapy drugs, insulin and other drugs.

Features:

- * The temperature accuracy of instrument is $\pm 0.1^{\circ}\text{C}$
- * Preheating time is less than 2 minutes, rapid heating reduces waiting time
- * With door opening alarm, high and low temperature alarm devices that trigger when the monitored temperature deviates by 0.5°C from the set point, with a flashing alarm light and an accompanying beep signal (BK-TW102)
- * With high temperature alarm, low temperature alarm, system error alarm, overtime alarm, heating prompts (BK-TW101/201)
- * The protection level against water intrusion is IPX I type, water drops falling vertically have no harmful effects
- * With dual hardware and software triple temperature protection, ensuring safe use of the equipment
- * The heating instrument operates at a noise level of $\leq 65\text{dB(A)}$ during normal operation
- * Two temperature units are available, which can be switched between degrees Celsius and degrees Fahrenheit
- * Medical-grade heating silicone tubes ensure safe use, wrapping the entire pipeline to deliver effective temperature directly to the patient, with a variety of tube diameters and lengths available for selection (BK-TW101/201)

Technical Parameters:

Model	BK-TW201	BK-TW101	BK-TW102
Display	LCD display		LED display
Temp. Range	32~42°C		RT+5~45°C
Temp. Resolution	0.1°C		
Temp. Fluctuation	$\pm 0.5^{\circ}\text{C}$		
Temp. Uniformity	/		$\pm 1.0^{\circ}\text{C}$
Preheating Time	$\leq 2\text{min}$		$\leq 2\text{min}$ (From $25\pm 2^{\circ}\text{C}$ to 35°C)
Environment Temperature	5~40°C		5~30°C
Temp. Error	$\pm 0.5^{\circ}\text{C}$		$\pm 1.0^{\circ}\text{C}$
Timing Range	0~99h/Continuous		
Consumption	180W	120W	85W
Power Supply	AC 110/220V, 50/60Hz		
External Size (L*W*H)	104*45*170mm	94*45*170mm	77*35*177mm
Packing Size (L*W*H)	240*225*220mm		250*205*100mm
Net Weight	0.8kg	0.7kg	0.5kg
Gross Weight	2.0kg	1.9kg	1.1kg



BK-TW110



BK-TW210

Introduction:

This product is primarily used for warming and maintaining the temperature of fluids (Excluding analgesics, chemotherapy drugs and insulin) administered to the human body. (Non-contact with blood or medication)

Features:

- * BK-TW110 is single-channel blood and fluid warmer, BK-TW210 is dual-channel blood and fluid warmer.
- * Dry heating method, short preheating time, rapid heating.
- * High-quality heating tube assembly, full-wrapped heating, fast heating in cold environment.
- * Heating tube assembly is plug-and-play, convenient and fast.
- * Directly heat conventional blood transfusion and infusion lines, no special consumables required, cost saving.
- * Real-time display of set temperature, real-time temperature, alarm information, working status, etc.
- * With over temperature alarm, under temperature alarm, no liquid alarm function.

Technical Parameters:

Model	BK-TW110	BK-TW210
Channel Count	Single-channel	Dual-channel
Adjustable Temp. Range	32.0~42.0°C	
Temp. Accuracy	0.1°C	
Preheating Time	$\leq 2\text{min}$ (From 20°C to 36°C)	
Display	LED	
Display Information	Heating time, set temperature, heating temperature, alarm information indication	
Inner Diameter of Heating Tube	Standard: 3.5~5mm Optional: 6~7mm	
Safety Control	The system has built-in alarm test function, and the alarm function can be tested on the panel to see if it is normal	
Over-temperature Alarm	An alarm will sound if the actual temperature of the heating pipe exceeds the preset temperature by 2°C	
Under-temperature Alarm	An alarm will sound if the actual temperature of the heating pipe falls below the preset temperature by 3°C .	
Heating Tube Structure	Three-cavity silicone flexible heating sleeve, integrated with 4 sets of heating wires, two sets of independent temperature sensors	
Power	60VA	80VA
Power Supply	AC 100~240V, 50~60Hz	
External Size (W*D*H)	172*95*175mm	195*115*175mm
Packing Size (W*D*H)	250*220*230mm	
Net Weight	1.7kg	2.3kg
Gross Weight	2.1kg	2.7kg

Pulse Oximeter



Instruction:

Finger-clamp pulse oximeter is an economical and affordable instrument that accurately detects pulse rate and blood oxygen saturation through fingers. It also displays a volume waveform chart to ensure accuracy. The unique PI index effectively reflects the pulsating blood flow.

The self-adjusting finger clip and one-button design are easy to operate.

The screen is adjustable in 5 levels of brightness, small in size, easy to carry, suitable for daily use, and can measure your health at any time.

Application:

It is suitable for families, clinics, oxygen bars, sports health care (used before and after exercise, not recommended for use during exercise), community medical care, etc. It is suitable for patients aged 15-60. This product is not suitable for continuous monitoring of patients.

Features:

- * OLED display, high brightness, wide viewing angle, clearer display.
- * Adjustable display direction, 360 degree direction display.
- * Small size, light weight, easy to carry.
- * Automatic shutdown in 8 seconds without finger
- * Low power consumption, two AAA batteries can be used for 50 hours.
- * Anytime, anywhere, non-invasive and painless, easy to operation.

Technical Parameters:

Model	PO-40A	PO-50B
SpO ₂ Range	70%~99%	35%~100%
SpO ₂ Accuracy	±2%	±1% (90%~99%); ±2% (70%~89%)
Pulse Rate(PR)Range	30bpm~250bpm	25bpm~250bpm
Pulse Rate(PR)Accuracy	±1bpm	
Display	OLED	
Display Refresh Frequency	1s	
Calculation Time	8s	
Fuse	466 Series, 0.5A6.3V	
Power Supply	DC3V (2*AAA Battery)	
External Size(W*D*H) mm	57*31*30	63*37*32
Package Size(W*D*H) mm	89*60*40	80*65*48
Gross Weight(g)	44 (Without battery)	54 (Without battery)

Vein Finder



Introduction:

Vein finder could display the dynamic digital image of blood vessel directly on the screen in real time, which can help healthcare professionals to verify the vein directly and clearly and ease the pain for the patients.

Principle of imaging:

The oxyhemoglobin and deoxyhemoglobin in the blood have a stronger absorption rate of infrared light than other tissues. According to this principle, the imager uses infrared light source to illuminate, and after the processing of infrared special camera system and photoelectric signal processing system, the clear blood vessel image is displayed on the screen in real time.


Feature:

- * Infrared special 5 million pixels HD camera, no deviation, no delay, high image definition.
- * Narrow band infrared light source, no radiation, no damage.
- * 6.5-inch industrial HD display, advanced image processing technology, can realize vascular visualization.
- * Two kinds of image enhancement and color enhancement mode, clear venous angiography, improve the success rate of venipuncture.
- * The support can be folded and retractable, and the screen can be flipped freely to facilitate vein observation at different angles.
- * It is suitable for auxiliary observation and search of subcutaneous veins, auxiliary venipuncture, outpatient transfusion, etc.

Technical Parameters:

Model	BK-VIA100
Function	Observe and search for subcutaneous vessels and auxiliary venipuncture
Display	6.5-inch industrial HD display
Camera	Infrared special 5 million pixels HD camera
Optimal Operating Distance	Adjustable focus
Light Source	760~940nm dual light source
Operating System	Windows system, vascular enhancement processing software
Image Mode	Multiple color modes and image enhancement
Software Functions	Image flip, enhance, freeze and video, playback and other functions
Language	Chinese and English
Interface	USB (Export clinical pictures and video data, software upgrade)
Power Supply	AC100~240V 50/60Hz
Consumption	60W
External Size (W*D*H)	500*240*210mm
Net Weight	4kg
Package Size (W*D*H)	600*350*350mm
Gross Weight	12kg

Intelligent Centrifuge Balancer

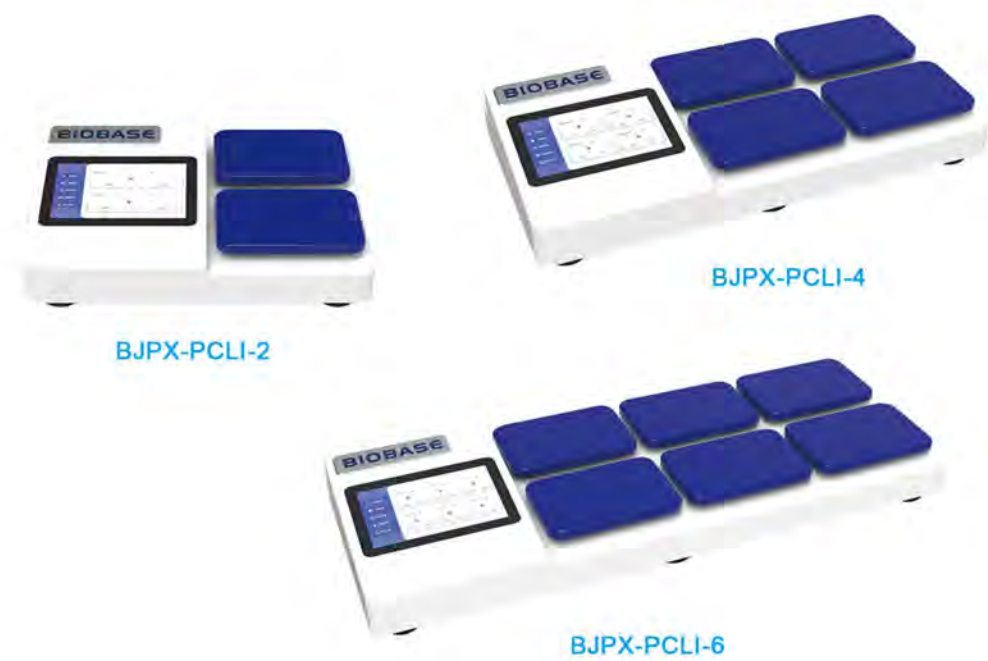

Features:

- * Microcomputer processing technology with program memory ensures high accuracy.
- * Each pallet weighing system is independently controlled.
- * Customize the specific gravity coefficient and easily convert between g and ml.
- * Directly display the weight and weight difference of each pallet.
- * Directly calibrate the weighing panel.
- * 7.0-inch true-color touchscreen display.

Technical Parameters:

Model	BJPX-PCLI-2	BJPX-PCLI-4	BJPX-PCLI-6
Display	7.0-inch touch screen		
Pallet Number	2	4	6
Weighing Range	0~5000g		
Resolution	1g		
Repeatability	±1g		
Linear	±1g		
Ambient Temperature	5~30℃		
Single Pallet Size	124*180mm		
Rated Power	8W		
Power Supply	AC100~240V 50/60Hz		
External Size(L*W*H)	420*320*120mm	610*320*120mm	800*320*120mm
Net Weight	7kg	10kg	13kg
Packing Size(L*W*H)	650*480*305mm	840*480*305mm	1030*480*305mm
Gross Weight	27kg	30kg	33kg

Low Temperature Blood Operating Cabinet




Features:

- * The operating space features a sloped, trapezoidal structure for optimal ergonomics.
- * Microcomputer-based precision temperature control technology ensures high temperature accuracy, a real-time digital display of the tabletop temperature, over- and under-temperature alarms, and convenient parameter settings.
- * The product is equipped with a built-in multi-function socket for powering external devices to meet your work needs.
- * The tabletop is crafted from high-quality brushed stainless steel for an attractive appearance and enhanced ease of use and cleaning.
- * Protection for personnel: leakage current and overvoltage protectors are included.
- * Protection for samples: over- and under-temperature alarms are included.
- * Product self-protection: The compressor features delayed start and high-temperature protection.

Technical Parameters:

Model	BJPX-PX
Display	3.5-inch color LCD touch screen
Refrigerant	R290
Refrigeration Mode	Forced air cooling
Temperature Control Range	2~8℃
Temperature Display Resolution	0.1℃
Ambient Temperature	10~28℃
Refrigerating Chamber Size(L*W*H)	420*280*50mm
Timing Range	1~999min
Standard Accessories	Lamp, UV lamp, 10x observation mirror
Rated Power	800W
Power Supply	Standard: AC220V 50Hz; Optional: AC110V 50Hz, AC110V 60Hz
External Size(L*W*H)	1460*720*1570mm
Net Weight	185kg
Packing Size(L*W*H)	1620*880*1750mm
Gross Weight	235kg

Low Temperature Blood Operating Bench

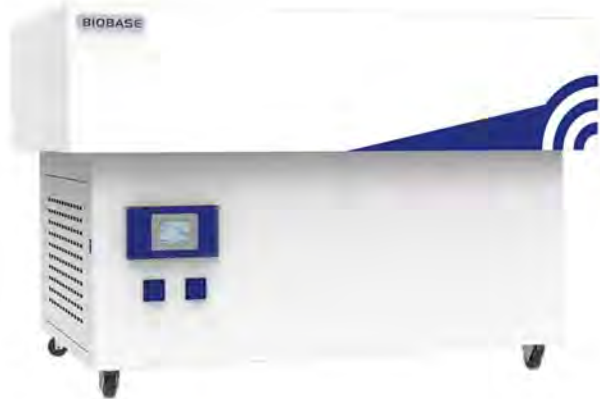

Introduction:

The Blood low-temperature workstation adopts microcomputer control, real-time temperature digital display, convenient functional parameter setting, automatic constant temperature.It is widely used in blood transfusion departments and clinical blood transfusion to provide a suitable blood matching environment and avoid cross infection.


Features:

- * The scientific and reasonable design of the operating countertops can effectively avoid the blood sample slipping off the table.
- * Using microcomputer precision temperature control technology, high temperature control precision, real-time digital display table temperature, with ultra-low temperature alarm, convenient parameter setting.
- * Product countertop is made of high-quality stainless steel wire drawing process, appearance beautiful, use more convenient clean.
- * Equipped with leakage current and over voltage protector.
- * The compressor has the function of delay starting and high temperature protection.

Technical Parameters:

Model	BJPX-PD
External Size(W*D*H)mm	1350*880*860
Internal Size(W*D*H)mm	1310*820*20
Display	Touch display
Temp. Range	2~8℃
Temp. Resolution	±0.1℃
Refrigeration Type	Air cooling
Consumption	1800W
Power Supply	AC220±10%, 50/60Hz
Packing Size(W*D*H)mm	1500*1050*1010
Net/Gross Weight(kg)	175/205

Sealer
Automatic Sealer

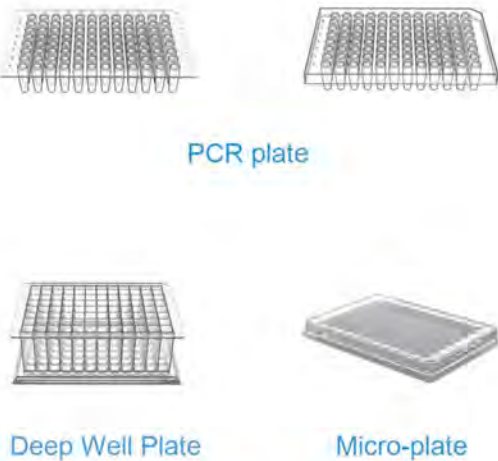

Introduction:

BK-AF96 Automatic Sealer is a full-automatic equipment for sealing PCR plate, deep well plate, micro-plate, etc. It is mainly used for sealed storage of heat-sensitive substances, which can effectively prevent sample loss and cross contamination.

Features:

- * Fully automatic and one key operation, no need of additional manual operation.
- * Adapts to varieties of plate types.
- * Adjustable sealing pressure.
- * A variety of communication interfaces are reserved, which can be quickly connected to other machines.
- * Each roll of film can seal more than 350 plates(reference).

Technical Parameters:

Model	BK-AF96
Positions	1pc
Method	Cold Seal
Speed	<16s/plate
Operating Mode	Manual plate change, automatic sealing
Application	PCR plate, deep well plate and micro-plate conforming to SBS standard(customizable)
Control Mode	Buttons
Interface	USB
Consumption	75W
Power Supply	100-240V, 50/60Hz
External Size (L*W*H) mm	310*380*410
Package Size (L*W*H) mm	454*382*464
Net Weight	16.5kg
Gross Weight	20.5kg

Automatic Sealing and Capping Machine

Introduction:
BH-FM01 seals various special membranes on various microplates (PCR plates, nucleic acid extraction plates, enzyme-labeled plates, etc.) by means of heat sealing, in order to prevent evaporation, leakage and cross-contamination of reagents during testing or transportation.

Application:
Widely used in bio-medicine, inspection institutions, hospitals, reagent manufacturers, universities and other places.

- Features:**
- * 4.3-inch touch screen, easy to operate.
 - * Real-time observation of the operating state of the instrument, can be used as a single machine.
 - * Customize the sealing temperature as required.
 - * Complete the whole process automatically, with stable results and good repeatability.
 - * Suitable for a variety of heat sealing films.
 - * Multifunctional limit column to prevent heat seal film offset.
 - * With emergency stop function and standby function.

Technical Parameters:

Model	BH-FM01
Temp. Range	RT~210℃
Temp. Precision	±1℃
Heating Rate	Heat to 170 ℃ in 240 seconds
Cooling Keep	When sealing the film, the heating body drops temperature :≤3℃, and rises to the preset temperature within 20s.
Sealing Membrane Time	0.1~15s
Film Sealing Time Accuracy	0.1s
Pressure Level	1~5 level can be set, multi-level adjustable
Plate Type	Deep well plate, PCR plate, ELISA plate, etc. Optional: ELISA plate adapter, 384 well plate adapter,PCR plate adapter
Consumption	400W
Power Supply	Standard: 220V 50/60Hz Optional: 110V 50/60Hz
External Size	325*176*262mm
Package Size	530*230*290mm
Net/Gross Weight	10.5/11.5kg



Introduction:
BK-AG96 automatic sealing and capping machine adopts a vertical compression design, the sealing and capping effect is tight and does not leak, which effectively avoids sample loss and cross-contamination; Mainly used for PCR experiments, it can be used for the sealing film of un-skirted PCR plate, semi-skirted PCR plate, full skirted PCR plate, and the capping of 8-strip PCR tubes; One-button start, the whole process is simple, fast, convenient and safe.

Application:
It can be applied to medical inspection institutions such as hospitals, disease prevention and control centers, mobile inspection laboratories, etc.

- Features:**
- * One-button start.
 - * Simple and fast operation.
 - * Safe and labor-saving.
 - * Capping/sealing speed≤4s.

Technical Parameters:

Model	BK-AG96
Throughput	8-96, suitable for 8-strip PCR tubes and 96-well PCR plates
Start Method	Button
Speed	Capping\sealing speed≤4s
Function	8-strip PCR tubes capping, 96-well PCR plate capping, PCR plate sealing film
Adapter	2 types, 8-strip PCR tubes and 96-well PCR plates, can be customized
Pressure	Peak pressure: 300kg
Power Supply	100-240V 50/60Hz
External Size (W*D*H)	277*194*230mm
Net Weight	9.2kg
Package Size (W*D*H)	300*260*340mm
Gross Weight	12kg

Manual Medical Sealer



Features:

- * Carbon steel spray-coated housing, aluminum alloy pressure plate, high temperature resistance, aging resistance, long service life.
- * Equipped with a long pressing handle, more labor-saving.
- * With temperature adjustment function, it can adapt to different packaging materials.
- * With over-temperature protection function.
- * Adopt high-quality alloy blades, cutting is smooth and flat.
- * The effective sealing packaging bag width can reach 280mm.

Technical Parameters:

Model	MS-H1
Shell Material	Carbon steel spray
Accessories Material	Aluminum alloy, 304 stainless steel
Heat Sealing Temperature	60~220℃, can be adjustable
Seal Width	10mm
Seal Method	Manual pressing
Input Power	300W
External Size	370*300*130mm
Power Supply	AC220V 50/60Hz
Net Weight	5.5kg
Packing Size	420*380*160mm
Gross Weight	6.2kg

Automatic Medical Sealer



MS-10



MS-30P


Features:

- * Automatic fast continuous heat sealing technology is adopted to improve the packaging efficiency
- * High temperature ceramic plate is adopted, which heats up quickly, heats evenly, can be dry-burned, and has a long service life
- * Intelligent temperature control temperature is adjustable from room temperature to 220℃, and the working temperature is accurately controlled by ±1℃
- * It has a fault prompt function, which can monitor the operation of the machine in real time during operation
- * The floating constant pressure pressing system design is suitable for the sealing needs of high and low temperature sterilization packaging bags, paper-plastic three-dimensional bags and paper-paper bags
- * Printing function for model MS-30P

Technical Parameters:

Model	MS-10	MS-30P
Shell Material	Casing carbon steel spray-coated	Casing carbon steel spray-coated
Accessory Material	Aluminum alloy, 304 stainless steel	Aluminum alloy, 304 stainless steel
Heat Sealing Temperature	RT~220℃, can be adjustable	RT~220℃, can be adjustable
Sealing Width	12mm	12mm
Sealing Speed	≥10m/min	≥10m/min
Sealing Margin	0~40mm	0~40mm
Screen	Digital tube display	7-inch color touch screen
Control System	/	Industrial system
Printing System	/	Printing module can be ejected from the side to replace the ink cartridge
Printing Mode	/	Needle type, single line
Information Export	/	USB
Input Power	400W	400W
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz	
External Size	540*240*188mm	540*240*188mm
Net Weight	11kg	12kg
Packing Size	615*315*260mm	615*315*260mm
Gross Weight	14kg	15kg

Automatic Medical Sealer

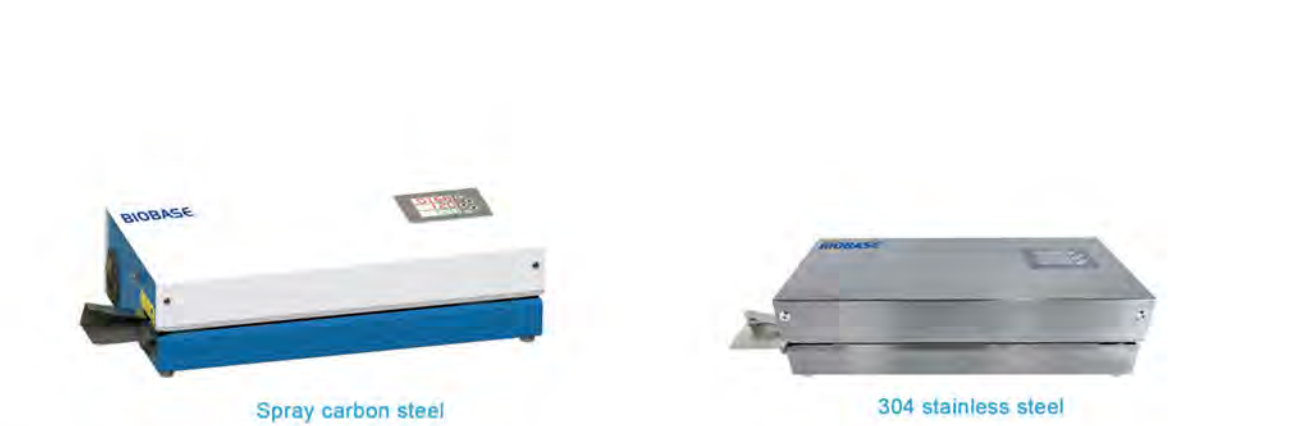

Features:

- * Auto-control function, continuous operation; substitution of manual sealing machine;
- * Microcomputer Temperature controller, accuracy ±1%, working temperature range 60~220℃;
- * Fast heating, 40 seconds required from room temperature to 180℃;
- * Adjustable fixed-force system, suitable for sealing paper-plastic bags, 3D paper-plastic bags and paper-paper bags;
- * Advanced flat ceramic heating components, high-temperature stability, long life expectancy and high heat efficiency.


Technical Parameters:

Model	MS100-L
Seal Speed	10m/min
Seal Width	12mm
Seal Margin	0~35mm adjustable
Display	LED screen
Machine Shell Material	Spray carbon steel(standard) or 304 stainless steel(optional)
Consumption	500W
Power Supply	AC110/220V±10%, 50/60Hz
External Size (W*D*H)	490*240*120mm
Packing Size (W*D*H)	600*380*260mm
Net/Gross Weight	11/12kg

Printing Medical Sealer

Features:

- * Temperature controlled by a microcomputer, accuracy ±1%, working temperature range is 60~220℃;
- * Automatic fault detection and alarm;
- * Fast heating, 40 seconds required from room temperature to 180℃;
- * Automatic temperature reduction operated by a fan connected to temperature control system, reducing the waiting time;
- * Adjustable fixed-force system, suitable for sealing 3D paper-plastic bags and paper-plastic bags of any sickness;
- * Advanced flat ceramic heating components, high-temperature stability, long life expectancy and high heat efficiency.

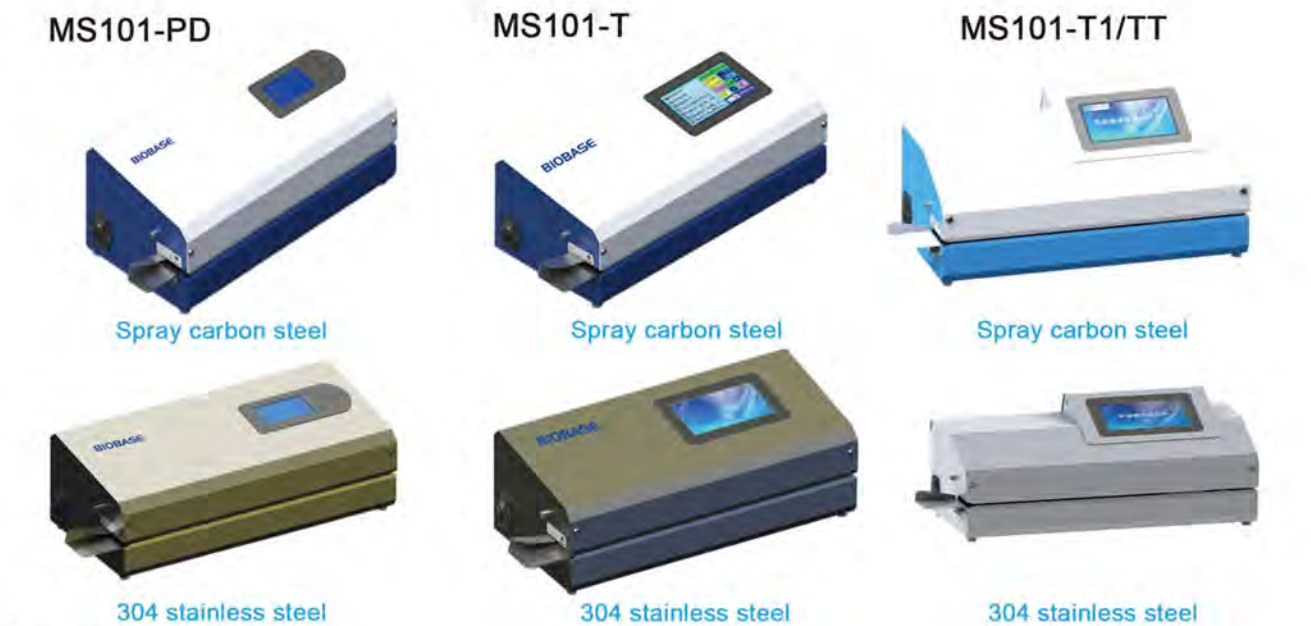

Printing System Features:

- * Print function can be disabled or partially activated;
- * Sterilizing and expire date auto adjust; Automatic faults alarm display during working;
- * Adjustable character font and style, easy to print more information on narrower bags;
- * The system provides the required minimum width of the bag based on the content of print, easier for users to define the print content or select appropriate bag; Auto alarm when width is insufficient;
- * With sealing detection mode;

Technical Parameters:

Model	MS101-PD	MS101-T	MS101-TT
Seal Speed	10m/min		
Seal Width	12mm		
Seal Margin	0~35mm adjustable		
Display	4.3" color LCD screen	7 "color LCD touch screen	
Machine Shell Material	Spray carbon steel(standard) or 304 stainless steel(optional)		
Other Functions	/	/	Double line printing
Consumption	500W		
Power Supply	AC110/220V±10%, 50/60Hz		
External Size (W*D*H)	560*260*220mm		
Packing Size (W*D*H)	670*360*340mm		720*360*340mm
Gross Weight	19kg		22kg

Pharmacy Instrument

Disintegration Tester

Introduction:

The disintegration tester is a pharmacopeial instrument designed to assess the disintegration time of tablets, capsules, and pills in compliance with the Chinese Pharmacopoeia. It is critical for quality control of solid dosage forms and pharmaceutical formulation development. By measuring disintegration duration, it evaluates drug release kinetics to ensure in vivo performance meets specifications. This instrument plays a vital role in production monitoring, quality assurance, and formulation optimization.



- Features:**
- * Dual-basket system for simultaneous disintegration testing.
 - * Two independent baskets enable parallel experiments.
 - * Electronic temperature sensors monitor and display real-time water bath and vessel temperatures.
 - * Automatic temperature control at 37.0°C (pharmacopeia-compliant) with customizable presets.
 - * Programmable lifting cycle duration (default: 15 minutes; adjustable bidirectionally).
 - * User-friendly capacitive touchscreen with high-resolution interface.
 - * Overheat alarm and automatic protection for water bath temperature.

Technical Parameters:

Model	BBJ-2
Basket	2 pcs
Beaker Capacity	1000ml
Basket Lifting Frequency	30~31 times/min
Basket Lifting Height	55±1mm
Minimum Spacing	25±1mm
Mesh Size	Standard 2mm,(0.425mm, 1mm is optional)
Temp. Range	RT~45°C
Temp. Precision	±0.5°C
Timing Range	1~900min
Time Precision	±0.5min
Working Time	>24h
Power Consumption	550W
Power Supply	AC220V, 50Hz(Standard); AC220V/110V, 60Hz(Optional)
External Size(W*D*H) mm	400*320*440
Package Size(W*D*H) mm	470*370*500
Net Weight(kg)	16
Gross Weight(kg)	19

Dissolution Tester

Introduction:

The dissolution tester is widely used in pharmaceutical production to evaluate the rate and extent of drug release (dissolution) for tablets, capsules, and granules, as stipulated by the Chinese Pharmacopoeia. Accurate measurement of dissolution is critical for quality control, making the calibration and technical performance optimization of dissolution testers highly significant.



- Features:**
- * Dual-function electric lifting and tilting of the test head.
 - * Intuitive human-machine interface for simplified operation.
 - * Pre-settable parameters with automatic storage, no reset required upon restart.
 - * High-precision rotation control with stable operation and low energy consumption.
 - * Integrated sensors and optimized software/hardware control ensure rapid heating, high accuracy, and easy temperature calibration.
 - * Independent timer control for flexible start, pause, and reset functions.
 - * Self-diagnostic alarms and overheat protection.

Technical Parameters:

Model	BRC-3
Basket	3pcs
Speed Range	20~200rpm
Speed Precision	±2rpm
Temp. Range	RT~45.0°C
Temp. Precision	±0.3°C
Timing Range	1~999min
Time Precision	±0.5min
Working Time	>24h
Paddle Swing Amplitude	≤0.3mm
Basket Swing Amplitude	≤0.8mm
Power Consumption	600W
Power Supply	AC220V,50Hz(Standard); AC220V/110V, 60Hz(Optional)
External Size(W*D*H)mm	540*380*550
Package Size(W*D*H)mm	590*450*600
Net Weight(kg)	56
Gross Weight(kg)	62

Tablet Friability Tester

Introduction:

The friability tester is designed to evaluate the mechanical stability, abrasion resistance, and collision resistance of uncoated tablets during production, packaging, storage, and transportation. It also assesses the friability of coated tablets and capsules.



Features:

- * Single-channel dual-drum system with synchronous operation and automatic shutdown.
- * High-quality colorless transparent acrylic drum for clear observation.
- * Preconfigured parameters compliant with pharmacopeial standards for rotation counts and speed, ensuring user-friendly operation.
- * Intelligent control of drum rotation speed and cycle counts for precise performance.
- * LCD display with time-sharing readouts of preset and real-time values.

Technical Parameters:

Model	BCS-2
Cylinder Number	2
Cylinder Radius	Φ286mm
Cylinder Depth	39mm
Tablet Fall Height	156mm
Rotating Speed	30rpm
Rotating Accuracy	±1rpm
Rotation Count	100turns
Consumption	20W
Power Supply	AC220V,50Hz(Standard); AC220V/110V, 60Hz(Optional)
External Size(W*D*H) mm	370*300*340
Package Size(W*D*H) mm	510*410*510
Net Weight(kg)	8
Gross Weight (kg)	12

Tablet Hardness Tester



Introduction:

The tablet hardness tester is designed to measure the crushing hardness of tablets.

Features:

- * High-precision pressure sensor ensures accurate and reproducible testing.
- * High-definition LCD display with intuitive interface provides clear prompts and quantitative metrics for user-friendly operation.
- * Flexible measurement modes: Manual single-tablet testing or automatic continuous testing.
- * Automated functions: Tablet pressing, real-time display, auto-locking, auto-reset, cyclic testing, linear error correction, and fault diagnosis.
- * Historical data query for automatic continuous testing, facilitating efficient data management.
- * Automatic ejection travel calculation minimizes downtime during testing.
- * Quick and precise measurement of tablet diameter.

Technical Parameters:

Model	BYD-2
Test Range	2~200N/500N(0.2~20kg), Customize: 2~500N(0.2~50kg)
Resolution	0.1N, 0.01kg
Accuracy	±0.5%
Tablet Test Diameter	2~40mm
Repeatability	±1%
Number of Tablets per Test Group	≤100
Consumption	40W
Power Supply	AC220V,50Hz(Standard); AC220V/110V, 60Hz(Optional)
External Size(W*D*H) mm	400*240*160
Package Size(W*D*H) mm	510*360*310
Net Weight(kg)	8
Gross Weight (kg)	12

Clarity Tester



Introduction:
 The clarity tester is designed to inspect the transparency of injectables and bottled liquid medications.

- Features:**
- * Dual-sided design for simultaneous two-person operation.
 - * High-precision light sensors and shading technology for precise control of dedicated tri-color fluorescent lamps.
 - * Flicker elimination, adjustable illuminance, high detection resolution, and minimized visual fatigue.
 - * Automated functions: Timed testing, alarm triggers, and continuous automated analysis.

Technical Parameters:

Model	BCM-2
Lamp	2*8W fluorescent lamp
Illumination Range	1000~4000LUX
Time Range	1~99s
Consumption	20W
Power Supply	AC220V,50Hz(Standard); AC220V/110V, 60Hz(Optional)
External Size(W*D*H) mm	680*410*500
Package Size(W*D*H) mm	810*610*610
Net Weight(kg)	10
Gross Weight (kg)	16

Transparency Tester

Introduction:
 The transparency tester is designed to measure the transparency of gelatin and other translucent materials.

- Features:**
- * Environmental interference elimination: ensures stable results by minimizing ambient light impact.
 - * Standardized glass tube: facilitates easy sample loading and retrieval.
 - * Sealed light source system: reduces external environmental effects.
 - * User-friendly operation: simplified controls and reliable performance.
 - * Safety compliance: powered by a national standard single-phase three-hole AC socket with secure grounding.

Technical Parameters:

Model	BTM-1
Test Range	20~500mm
Accuracy	±5mm
Glass Tube Capacity	500 mL
Operating Temperature	18~28°C
Storage Temperature	-10~50°C
Relative Humidity	20%~80%
Consumption	100W
Power Supply	AC220V,50Hz(Standard); AC220V/110V, 60Hz(Optional)
External Size(W*D*H) mm	600*200*630
Package Size(W*D*H) mm	700*300*750
Net Weight(kg)	6
Gross Weight (kg)	9



Benchtop Thickness Tester

Introduction:
 Widely used in universities, pharmaceutical industries, drug testing institutes, and research facilities for quality control and R&D.

- Features:**
- * Measure the wall thickness and top thickness of various capsules and the diameter and thickness of various tablets, pills, etc.
 - * High-precision testing with domestically manufactured premium dial indicators.

Technical Parameters:

Model	BHD-2
Thickness Range	0~30mm
Thickness Test Precision	±0.01mm
Measurable Capsule Size	00, 0, 1, 2, 3, 4,5
External Size(W*D*H) mm	200*80*50
Package Size(W*D*H) mm	250*130*100
Net Weight(kg)	1
Gross Weight (kg)	1.5



Disintegration Tester

Disintegration tester is used for detecting disintegration of solids under prescriptive conditions.



Features:

- * Auto-diagnose, auto-alarm.
- * Stainless steel basket and paddle.
- * Micro processor and LCD Display.
- * Each beaker can work alone.
- * Water circulating in the bath to keep the temperature conformity with magnetic pump.

Technical Parameters:

Model	BK-BJ1	BK-BJ2	BK-BJ3	BK-BJ4
Basket	1pc	2 pcs	3 pcs	4 pcs
Beaker Capacity	1000ml			
Basket Lifting Frequency	30~31 times/min			
Stroke Height	55±1mm			
Minimum Spacing	25±2mm			
Mesh Size	Standard 2mm			
Temp. Range	RT~50℃			
Temp. Precision	±0.3℃			
Timing Range	1~900min			
Time Precision	±0.5min			
Working Time	>24h			
Power Consumption	600W			
Power Supply	AC220V/110V±10%, 50/60HZ			
External Size (W*D*H) mm	260*300*440	400*320*440	540*320*440	600*320*440
Package Size (W*D*H) mm	360*400*530	510*410*535	640*400*530	700*400*530
Gross Weight (kg)	12	18.5	23	28

Dissolution Tester

Dissolution tester is used for detecting pharmic dissolution from tablet, capsule etc. in prescriptive menstruum.



Features:


- * Auto-diagnose, auto-alarm.
- * Stainless steel basket and paddle.
- * Micro processor and LCD Display.
- * The head part of the instrument can be turned over smoothly and flexibly(Rise and fall for BK-RC8).
- * Water circulating in the bath to keep the temperature conformity with magnetic pump.

Technical Parameters:

Model	BK-RC1	BK-RC3	BK-RC6	BK-RC8
Basket	1 pc	3 pcs	6 pcs	8 pcs
Speed Range	20~200rpm			
Speed Precision	±2rpm			
Temp. Range	RT +45.0℃			
Temp. Precision	±0.3℃			
Timing Range	5~900min	5~900min	1~999min	1~999min
Time Precision	±0.5min			
Working Time	>24h			
Paddle Swing Amplitude	±0.5mm			
Basket Swing Amplitude	±1.0mm			
Power Consumption	600W	600W	1200W	1200W
Power Supply	AC110/220V±10%, 50/60Hz			
External Size(W*D*H)mm	260*300*480	510*300*480	960*320*480	680*540*480
Package Size (W*D*H)mm	490*395*560	750*400*565	1210*440*550	930*660*530
Gross Weight(kg)	18.5	30	44	74

Tablet Friability Tester

It is used for detecting friability/abrasion of tablet.

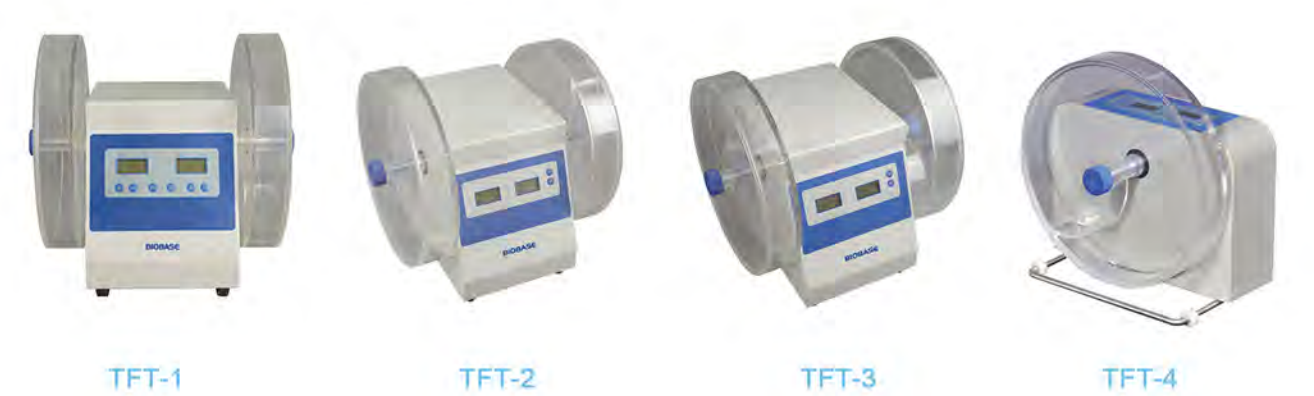

Features:

- * Automation: auto-test, auto-diagnose, auto-alarm.
- * Intelligently control the rotating speed of cylinder and revolutions.
- * One cylinder runs synchronously. Auto stop at timing point. (only for TFT-4)
- * Single path and double cylinder, synchronous operation and automatic stop.
- * The revolution of the drum can be preset at any time, either preset or real data is displayed on the LCD.
- * Microprocessor unit is used to control all operations, high accuracy is achieved in testing rotary speed and circle number.

Technical Parameters:

Model	TFT-1	TFT-2	TFT-3	TFT-4
Cylinder Number	2			1
Cylinder Radius	Φ286			
Cylinder Depth	39mm			
Tablet Fall Height	156mm			
Rotating Speed	20~100rpm	25rpm		
Rotation Count	5~900 turns	100 turns	5~900 turns	10-900 turns
Consumption	40W	20W		50W
Power Supply	AC110/220V±10%, 50/60Hz			
External Size(W*D*H)mm	370*300*340			300*200*340
Package Size(W*D*H)mm	450*410*535			420*315*435
Gross Weight(kg)	12			8

Tablet Hardness Tester

Tablet hardness tester is used to measure the crushing hardness of tablets.



Features:

- * LCD Display. High-precision pressure sensor ensures the precision and reproducibility of test.
- * Easy operation: Manual loading and manual tablet compressing for THT-1, manual single tablet and automatic continuation for THT-2/3.
- * Automatic display, automatic latching, automatic reset, automatic cycle test, automatic linear error correction and automatic fault diagnosis.
- * Unit conversion function, can realize the conversion before or after the tests.
- * Strong data processing ability; statistics, analysis, printing and display are available for test result. (only for THT-2)
- * Built-in printer. (only for THT-2)

Technical Parameters:

Model	THT-1	THT-2	THT-3
Test Range	2~200N(0.2~20kg)	2~200N/500N(0.2~20kg) Customize: 2~500N(0.2~50kg)	
Resolution	0.1N 0.01kg		
Accuracy	±0.5%		
Probe Procession Range	2~20mm	2~40mm	
Consumption	10W	40W	
Power Supply	AC110/220V±10%, 50/60Hz		
Dimensions(W*D*H)mm	280*180*110	500*400*160	400*240*140
Package Size(W*D*H)mm	420*305*230	550*350*250	500*350*250
Gross Weight(kg)	6	12	10

Thaw Tester

BTT-1 and BTT-4B thawing time limit tester is used to inspect the condition of thawing, softening or dissolution of solid preparations such as suppositories or vaginal tablets under the prescribed conditions.



BTT-1



BTT-4B

Features:

- * LCD Display
- * Three-beaker, three-path, three-path synchronization. Manual overturn for BTT-1, automatic overturn for BTT-4B.
- * Transparent sleeve, stainless steel net racks.
- * Automatic temperature control, automatic time keeping.
- * Timing overturn indication forecast and fault alarm. (only for BTT-4B)
- * Magnetic water pump circulating water flow uniform heat system is adopted, and bath temperature is uniform.
- * Double-functional head which can lift and descend electrically and turn over manually. (only for BTT-4B)

Technical Parameters:

Model	BTT-1	BTT-4B
Number of Sleeve	3 pieces	
Hyaline Sleeve Inner Size	Φ52*H60mm	
The Net Frame of Stainless Steel	2 pieces/diameter 50mm/each 39 holes of 4mm	
Automatic Time Range	10~900min	
Time Precision	±0.5min	
Temperature Control Range	20~45°C	
Temperature Control Precision	±0.5°C	
Volume of Beaker	5L*3	
Power Supply	AC110/220v±10%, 50/60Hz	
Package Size(W*D*H) mm	770*510*830	750*480*850
Gross Weight(kg)	45	64

Tablet Four-usage Tester

Four function: test hardness of tablet, friability/abrasion, disintegration and dissolution rate. It is a very ideal multi-purpose drug test instrument.

Features:

- * Auto-control, auto-detection, auto-diagnosis and auto-alarm.
- * Auto-temperature control and high temperature control precision.
- * Auto-time control and auto-timing shutdown.
- * Auto-display, auto-latching, auto-reset and auto-cyclic test.
- * Automatic control of friability and high control precision for cylinder rotation speed and number of turns.
- * Hardness high-precision pressure sensor, digital display of hardness value.
- * Continuous measurement of tablet hardness value, manual tablet feeding, motor control and automatic compression.
- * Two-path disintegration operates at the same time, automatic timing shutdown.
- * Imported SUS316 stainless steel is adopted for dissolution rotation baskets and paddle rods, etc.



Technical Parameters:

Model	TFUT-3
Temperature Range	(20~40°C)±0.3°C
Speed Range	(20~200rpm)±2rpm
Automatic Time Range	(1~900min)±0.5min
Stations of Dissolution	3
Paddle Radial Run-out	±0.5mm
Basket Radial Run-out	±1.0mm
Basket Assemblies	2
Nacelle Back and Forth Frequency	(30~32)times/min
Nacelle Back and Forth Range	(55±2)mm
Drum	1
Drum's Inner Size	Φ286*H39mm
Tablet Fall Height	156mm
Rotating Speed	(25±1)times/min
Rotating Count	(100±1)turns
Hardness Range	(25~199)±1N
Diameter Range	(3~40)mm
Power Supply	AC110/220V±10%, 50/60Hz
DimensionsW*D*H)mm	520*380*470
Packing Size(W*D*H)mm	700*440*680
Gross Weight(kg)	45

Clarity Tester

It tests clarity of injection and bottled medicine liquid.



CT-1



CT-2

Features:

- * Flash eliminated. Illumination is adjustable.
- * Time and alarm automatically. Test continuously.
- * CT-1 is one side for one operator. CT-2 are two sides for two operators.
- * The three-primary-color fluorescent lamp is controlled by good lighting sensor, electronic inductor and shading.

Technical Parameters:

Model	CT-1	CT-2
Lamp	Three-primary-color fluorescent lamp	
Illumination Range	1000~6000LUX	1000~4000LUX
Time Range	1~99s	
Consumption	40W	
Power Supply	AC110/220V±10%, 50/60Hz	
Package Size(W*D*H) mm	735*260*595	735*520*595
Gross Weight(kg)	14	20

Gel Strength Test System



Gel strength test system is mainly used to measure the gel strength of gelatin under the stipulated environment. It consists of: 1. Gel Strength Tester; 2. Constant Temperature Bath; 3. Refrigerator.

Features:

- * High-definition LCD Display.
- * Powerful data processing ability. submit mean value, final value or peak value automatically.
- * Four kinds of sampling measurement modes: single-step, maintaining, circulating and automatic.
- * Automatic measurement mode can help you obtain the value of gel strength faster, more accurately and more realistically.
- * 5 kinds of sampling speeds: 0.1mm/s, 0.2mm/s, 0.5mm/s, 1mm/s and 2mm/s.
- * Sampling depth can be preset arbitrarily (1~60mm).
- * Professional high-precision pressure sensor.
- * High-precision mechanical drive matches with 4-class shockproof design.
- * Automatic correction of non-linear error, automatic fault diagnosis alarm, automatic outrange protection and automatic error correction prompt.
- * Embedded micro printer, standard serial printing, convenient storage of experimental data. (Only for GGST-3)

Technical Parameters:

Model	GGST-2	GGST-3
Test Range	5~1000 Bloom g	
Test Accuracy Range	±0.3%	
Resolution	1Bloom g	
Travel	1~60mm	
Travel Accuracy	≤±0.1mm	
Measured Diameter of Cylinder	12.700±0.010mm	
Consumption	60W	
Power Supply	AC110/220V±10%, 50/60Hz	
Standard Accessory	Constant Temperature Bath; Refrigerator	
Package Size (W*D*H)	360*360*530mm (Gel Strength Tester); 680*540*355mm (Constant Temperature Bath); 580*480*390mm (Refrigerator)	
Gross Weight	12kg (Gel Strength Tester); 25kg (Constant Temperature Bath); 21kg (Refrigerator)	

Automatic Laser Particle Size Analyzer



Application:

The particle size analyzer is a relatively general particle size analyzer that measures the size of powder particles according to the principle of light scattering. It has a wide dynamic range, fast measurement speed, and easy operation, making it ideal for measuring powder and liquid droplets with a wide particle size distribution. As a new type of particle size testing instrument, particle size analyzer has been widely used in other powder processing and application fields. Its application is of great significance to improve product quality and reduce energy consumption.

Features:

- * Advanced optical design: Converging Fourier transform test technology is used to ensure the maximum range of short focal lengths and effectively improve the resolution of the instrument; the uniqueness of the high-density detection unit makes it have a strong ability to detect small particles. A full range of seamless super power tests.
- * Anti dry ultrasound: ultrasonic anti-dry function can be realized to avoid damage to the ultrasonic in the absence of water for wet method.
- * Dust proof and shockproof design.
- * Sample residue-free design and bubble-free design for wet method.
- * Mis-operation protection: The instrument has a self-protection function for mis-operation, and the instrument does not respond to mis-operation.
- * Dry Wet Switching: one button automatic switching of software. (BPSA-6100D)

Technical Parameters:

Model	BPSA-2020L	BPSA-5100H	BPSA-5200H	BPSA-6100C	BPSA-6100D
Test Method	Dry method	Wet method	Wet method	Wet method	Dry and wet method
Test Range	0.1~800μm	0.1~800μm	0.1~1000μm	0.1~2000μm	Dry method: 0.1~1500μm; wet method: 0.01~1500μm
Number of Detector Channels	87	76	86	96	Dry method: 96; wet method: 127
Accuracy Error	<1% (D50 value of standard sample)	<0.5% (D50 value of standard sample)	<0.5% (D50 value of standard sample)	<0.5% (D50 value of standard sample)	<0.5% (D50 value of standard sample)
Repeatability Error	<1% (D50 value of standard sample)	<0.5% (D50 value of standard sample)	<0.5% (D50 value of standard sample)	<0.5% (D50 value of standard sample)	<0.5% (D50 value of standard sample)
Dispersion	High-pressure air dispersion; mechanical stepless speed-regulating vibration feeding; oil-free silent air compressor with dust filtration function, continuously adjustable from 0.1-0.8MPa; can filter moisture from the air.				Dry method: High-pressure air dispersion; mechanical stepless speed-regulating vibration feeding; oil-free silent air compressor with dust filtration function, continuously adjustable from 0.1-0.8MPa; can filter moisture from the air. Wet method: Ultrasonic frequency: f=40KHz, power: p=80W, time: adjustable; equipped with ultrasonic anti-dry-burning feature. Integrated circulation and stirring design, speed: 100~3950rpm adjustable. Rated circulation flow rate: 0~10L/min adjustable; Rated power: 25W.
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V, 50/60Hz				
Product Size(W*D*H)	700*495*300mm	980*410*450mm	800*280*335mm	800*280*335mm	1040*505*335mm
Net Weight	35kg	30kg	38kg	38kg	50kg
Packing Size(W*D*H)	840*390*500mm 580*380*440mm 430*430*590mm 450*450*720mm 350*350*400mm	940*420*520mm		1200*500*500mm	1200*380*520mm 700*400*530mm 430*430*590mm 350*350*400mm 450*450*795mm
Gross Weight	41kg 21kg 10kg 30kg 12kg	45kg		55kg	52kg 33kg 10kg 12kg 38kg

Automatic Laser Nanoparticle Size Analyzer



Introduction:

The BPSA-N9 laser nanoparticle size analyzer is widely used for particle characterization of samples such as organic or inorganic nanoparticles, emulsions, polymers, micelles, viral antibodies, and proteins, as well as for the detection and analysis of sample system stability and particle aggregation tendency.

Features:

- * Full DC power supply: Utilizes an external DC adapter, eliminating the need for internal 220V AC mains power, thus reducing AC interference and ensuring more stable and safer measurements.
- * High sensitivity and high signal-to-noise ratio: Equipped with a Hamamatsu low-darkness counting, high-sensitivity professional-grade PMT detector, providing strong photon signal capture capabilities and guaranteeing accurate and high-resolution results.

- * Professional analysis software: Includes built-in international standard algorithms such as cumulant method, NNLS, and Continua, ensuring results are highly consistent with mainstream international equipment.
- * High-precision temperature control: Dual-channel temperature control for the sample cell and laser achieves an accuracy of $\pm 0.1^{\circ}\text{C}$, ensuring constant temperature operation, preventing temperature drift, and improving accuracy and repeatability.
- * Stable optical path system: A constant-temperature, high-power semiconductor laser + fiber optic path, compact in size and highly resistant to interference, ensuring stable and reliable results.

Technical Parameters:

Model	BPSA-N9
Test Method	Wet method
Test Range	0.5~10000nm
Concentration Range	0.1~100mg/ml
Accuracy Error	<1%
Repeatability Error	<1%
Scattering Angle	90°
Sample Cell	10*10*40mm, 1~4ml(With temperature control protection)
Temperature Range	0-90°C(Temperature accurate to $\pm 0.1^{\circ}\text{C}$)
Test Speed	<5 minutes/time(Excluding sample dispersion time)
Power Supply	Standard: AC220V, 50/60Hz; optional: AC110V, 50/60Hz
Product Size(W*D*H)	440*245*228mm
Net Weight	9.5kg
Packing Size(W*D*H)	560*450*380mm
Gross Weight	22kg

Laboratory Test Sieve



BK-TS200/300



BK-TS200X

Application:

Lab test sieve is suitable for particles distribution analysis. It is primarily used to determine particle size distribution for particles, powder and liquid in laboratory and quality control department.

Features:

- * Screen mesh size range: from 2 mesh to 2800 mesh.
- * Timing range: 0~99min59s, time can be set from seconds to hours freely.
- * Typically requires 50~150g of sample material.

Technical Parameters:

Model	BK-TS200	BK-TS200X	BK-TS300
Working Layer	1~8 layers		
Screen Mesh Size	0.003~12.5mm		
Diameter	200mm		300mm
Material	Stainless steel 304		
Timing Range	0~99min59s		
Speed	1440r/min		
Power Consumption	125W		180W
Power Supply	AC 220V, 50Hz(Standard); 220V, 60Hz; 110V, 60Hz(Optional)		
Standard Accessory	Lid and Base(Except BK-TS300)		
External Size(W*D*H)	400*300*370mm	390*340*340mm	435*390*370mm
Package Size(W*D*H)	460*380*430mm	470*410*570mm	530*470*420mm
Net Weight	33kg	30kg	40kg
Gross Weight	35kg	40kg	42kg

Screen Mesh:

Number of Mesh	Aperture (mm)	Number of Mesh	Aperture (mm)	Number of Mesh	Aperture (mm)
2	12.5	45	0.4	220	0.065
3	8	50	0.355	240	0.063
4	6	55	0.315	250	0.061
5	5	60	0.28	280	0.055
6	4	65	0.25	300	0.050
8	3	70	0.224	320	0.045
10	2	75	0.2	325	0.043
12	1.6	80	0.18	340	0.041
14	1.43	90	0.16	360	0.040
16	1.25	100	0.154	400	0.0385
18	1	110	0.15	500	0.0308
20	0.9	120	0.125	600	0.026
24	0.8	130	0.112	800	0.022
26	0.71	140	0.105	900	0.020
28	0.68	150	0.100	1000	0.015
30	0.6	160	0.096	1800	0.010
32	0.58	180	0.09	2000	0.008
35	0.50	190	0.08	2300	0.005
40	0.45	200	0.074	2800	0.003

Melting Point Apparatus
Melting Point Tester



Introduction:

Melting point tester adopts capillary tube as sample tube and liquid temperature transfer mode prescribed in Pharmacopoeia. It is suitable for testing melting points of pharmaceutical, chemical reagents, spices, dye etc.

Features:

- * Equipped with thermo sensitive mini printer.
- * Automatic magnetic stirring system, oil bath temperature is uniform.
- * High-precision temperature sensor, can correct non-linear error automatically.
- * Automation: automatic measurement, automatic diagnosis and automatic alarm.
- * Full-automatic frequency converting control, has high temperature control precision and small linear error of heating rate.

Technical Parameters:

Model	MPTD-1
Melting Point Test Range	RT~290°C
Heating Rate	Four levels: 0.5°C/min; 1°C/min; 1.5°C/min; 3.0°C/min
Deviation of Linear Heating Rate	<5%
Temperature Transfer Medium	Methyl silicone oil
Liquid Cup for Temperature Transfer	250ml beaker in tall form
Melting Point Test Precision	≤±0.5°C, melting point <200°C ≤±1.0°C, melting point >200°C
Indicating Value Resolution	0.1 °C
Operational Environment Temperature	18°C~28°C
Interface	Standard serial printing interface, with micro-printer
Power Supply	AC 220V, 50/60Hz(Standard); 110V, 50/60Hz(Optional)
External Size(W*D*H)	200*320*305mm
Package Size(W*D*H)	410*295*430mm
Net Weight	5kg
Gross Weight	8kg

Video Melting Point Apparatus



Features:

- * Android system with 10.1 inch touch screen, provides melting videos playback.
- * 720P HD camera for clear observation.
- * Use PID & PWM to control temperature.
- * The light source brightness and detection sensitivity can be adjusted to better measure dark color samples.
- * It can measure 4 samples at the same time.
- * Audit tracking function is optional, which meets the relevant requirements of the National Pharmacopoeia, GMP, GLP, and FDA/21CFR Part 11, and has user management permissions.

Technical Parameters:

Model	BK-P685	BK-P682
Measurement Range	R.T.~400℃	R.T.~360℃
Measurement Mode	Automatic/visual (high-definition camera, video capture, playback monitoring)	
Measurement Methods	200	150
Number of Users	200	150
Audit Trail	Optional (FDA)	
Electronic Signature	YES	
Resolution	0.01℃	
Linear Heating-up Rate	0.1℃/min~20℃/min	
Accuracy	≤200℃±0.3℃; >200℃±0.5℃	
Repeatability	0.3℃ (heating rate:1.0℃/min)	
Linear Heating Rate Error	±10%	
Number of Capillary	4	
Capillary Dimensions	Outer diameter: Φ1.4mm, inner diameter: Φ1.0mm, length: 90mm	
Height of Sample	3mm	
Operation System	Android	
Date Storage	128G	64G
Display	10.1 inches touch screen	
Graph Storage	40000	20000
Interface	1*RS232, 3*USB, 1*RJ-45, WIFI	
Power Supply	AC 100~240V, 50/60Hz, 150W	
Package Size(W*D*H)	495*493*350mm	
Gross Weight	5kg	

Digital Melting Point Apparatus



Introduction:

The principle of the melting point apparatus is based on the phase transition process of matter, that is, the transition from a solid to a liquid state. When measuring with a melting point meter, first place the sample to be tested in the sample chamber and ensure that the sample is in a solid state. Then, heat is applied to the sample through a heating system, gradually increasing the temperature of the sample. At the same time, the observation system records and displays the temperature change curve of the sample. When the sample reaches its melting point, the solid material begins to melt into a liquid state. This process absorbs heat, causing a noticeable steep drop in the temperature curve. The melting point meter determines the melting point of a substance by monitoring this temperature change.

Features:

- * Can connect to a computer for data transferring.
- * Touch screen.
- * Use PID & PWM to control the temperature.
- * Real time melting curve.
- * Equipped with clock function.
- * Calculate average value of initial and final melting points automatically.

Technical Parameters:

Model	BMP-1B
Measuring Range	RT~320℃
Resolution	0.1℃
Linear Heating-up Rate	0.1℃/min~20℃/min
Temperature Accuracy	±0.4℃(≤200℃), ±0.7℃(>200℃)
Repeatability	0.3℃(Heating rate: 1.0℃/min)
Capillary Size	φ1.4mm(outside diameter), φ1.0mm(inside diameter), 90mm(length)
Sample Loading Height	3mm
Data Storage	/
Interface	RS232, USB
Optional Accessory	Thermal printer
Power Supply	AC 110~240V, 50/60Hz
External Size(W*D*H)	360*290*170mm
Package Size(W*D*H)	500*445*330mm
Gross Weight	11kg

Digital Melting Point Apparatus



Introduction:
 The principle of the melting point apparatus is based on the phase transition process of matter, that is, the transition from a solid to a liquid state. When measuring with a melting point meter, first place the sample to be tested in the sample chamber and ensure that the sample is in a solid state. Then, heat is applied to the sample through a heating system, gradually increasing the temperature of the sample. At the same time, the observation system records and displays the temperature change curve of the sample. When the sample reaches its melting point, the solid material begins to melt into a liquid state. This process absorbs heat, causing a noticeable steep drop in the temperature curve. The melting point meter determines the melting point of a substance by monitoring this temperature change.

- Features:**
 - * PID&PWM controller.
 - * Touch screen.
 - * Equipped with clock function.
 - * The melting curve can be recorded automatically.
 - * It can calculate average value of initial and final melting points automatically.
 - * Can connect to a computer for data transferring.

Technical Parameters:

Model	BMP-2C	BMP-1C
Measuring Range	RT~360℃	RT~400℃
Resolution	0.1℃	
Linear heating-up Rate	0.1℃/min~20℃/min	
Temperature Accuracy	±0.4℃(≤200℃), ±0.7℃(>200℃)	
Repeatability	0.3℃(Heating rate: 1.0℃/min)	
Capillary Size	φ1.4mm(outside diameter), φ1.0mm(inside diameter), 90mm(length)	
Sample Loading Height	3mm	
Data Storage	1000 sets	
Thermal Printer	Standard	Optional
Interface	RS232, USB	
Power Supply	AC 110~240V, 50/60Hz	
External Size(W*D*H)	360*290*170mm	
Package Size(W*D*H)	580*445*320mm	500*445*330mm
Gross Weight	13kg	11kg

Anaerobic Jar

- Features:**
 - * Excellent airtight performance, avoiding any undue leakage.
 - * PMMA material, smooth surface, shock and impact resistant.
 - * Jar and lid are both transparent, sealing between lid and jar consists of an excellent quality O-ring.
 - * Strong jar-lid-clamp construction, guarantee the overall airtight performance.
 - * Colored stainless steel clamp with power electrostatic painting, durable and convenient for experimental management.
 - * Adopting quick snap-shut coupling, enabling quick connection to the system in one swift move.
 - * For BK-AJH series, configuration list: anaerobic jar, 15/25R rack, pressure gauge(standard: oil type, optional: oil-free type); For BK-AJG series, configuration list: anaerobic jar, 15/25 rack.



Technical Parameters:

BK-AJH Series Pumping Type Jar: 3 to 5 minutes every time

Model	Contents	Petri Dish Holder	Package Size(W*D*H)	Gross Weight
BK-AJH015	1 stack of 6 dishes(φ9-10cm) ø=130mm, h=150mm; 1.5 liters	15R	245*215*295mm	2.0kg
BK-AJH025	1 stack of 12 dishes(φ9-10cm) ø=130mm, h=240mm; 2.5 liters	25R	245*215*395mm	2.5kg
BK-AJH035	1 stack of 18 dishes(φ9cm) ø=130mm, h=280mm; 3.5 liters	15/25R	245*215*495mm	3.0kg
BK-AJH050	3 stacks of 6 dishes(φ9cm) ø=240mm, h=120mm; 5 liters	3/15R	370*370*340mm	5.6kg
BK-AJH070	3 stacks of 8 dishes(φ9cm) ø=240mm, h=160mm; 7 liters	3/15R	370*370*370mm	6.0kg
BK-AJH100	3 stacks of 12 dishes(φ9cm) ø=240mm, h=230mm; 10 liters	3/25R	370*370*470mm	7.0kg

BK-AJG Series Hermetic Type Jar: About 4 hours every time

Model	Contents	Petri Dish Holder	Package Size(W*D*H)	Gross Weight
BK-AJG015	1 stack of 6 dishes(φ9-10cm)	15R	245*215*295mm	2.0kg
BK-AJG025	1 stack of 12 dishes(φ9-10cm)	25R	245*215*395mm	2.5kg
BK-AJG035	1 stack of 18 dishes(φ9cm)	15/25R	245*215*495mm	3.0kg
BK-AJG050	3 stacks of 6 dishes(φ9-10cm)	3/15R	370*370*340mm	5.6kg
BK-AJG070	3 stacks of 8 dishes(φ9cm)	3/15R	370*370*370mm	6.0kg
BK-AJG100	3 stacks of 12 dishes(φ9cm)	3/25R	370*370*470mm	7.0kg

Bacterial Colony Counter

Application:

Widely used for bacilli inspection of food, drink, medicine, biological, make-up, health products, water for drink, domestic sewage, and industrial water.

Features:

- * CMOS integrated circuit and LED digital display.
- * An optional built-in data interface is available to connect to a computer for data statistics of colonies.
- * It is composed by counter, probe and count pond, etc.
- * The magnification is variable by adjusting the flecional arm.
- * The pressure-sensing counting system features marker highlighting for colonies and automatic cumulative verification.



Technical Parameters:

Model	BC-50	BC-50A
Phonetic Counting	No	Yes
Amplification	1X, 5X, 10X	
Counter Range	0~9999	
Suitable Petri Dishes	φ50-90-110mm	
Character Height	13mm	
Lamp Power	16W	
Power Supply	AC 220V, 50/60Hz(Standard); 110V, 50/60Hz(Optional)	
External Size(W*D*H)	255*180*110mm	
Package Size(W*D*H)	370*220*330mm	
Net Weight	1.7kg	
Gross Weight	3kg	

Biological Air Sampler

Introduction:

It is designed according to the principle of multi jet holes particle impact and isokinetic sampling. And it gets the consistence of animalcule more accurately. It is an ideal air biological sampler for medicine plant, hospital, biological products, food machining, public place, etc.



PMS-01



BK-BAS-V


Features:

- * Sampling hole has many small holes to reduce particles superposition and reduce error of animalcule count.
- * Programmable, sampling quantity can be set from 0.01 to 9.0m³.
- * LCD screen displays sampling quantity, sampling time, etc.
- * Sampling time can be set automatically.
- * Up to 256 samples data storage of sampling time, sampling volume and other parameters.
- * Easy to change petri dish, just only take down sampling hole to change petri dish. (Diameter: Φ90*15mm)

Technical Parameters:

Model	PMS-01	BK-BAS-V
Sampling Volume	100L/min±5%	
Flow Velocity of Sampling Holes	0.38m/s Basically the same as the clean room(Isokinetic sampling)	
Material	Anodised aluminium	SUS304 stainless steel
Structure	Microprocessor control, low noise pump sampling	
Rechargeable Battery	DC12V/3000mAh	DC14.8V/5000mAh
Operating Time on Battery	6~8h	
Power Supply	AC 110V~220V, 50/60Hz	
External Size(W*D*H)	120*200*340mm	235*220*180mm
Package Size(W*D*H)	180*350*430mm	400*430*240mm
Net Weight	2kg	4.8kg
Gross Weight	6.3kg	8.5kg

Microbial Air Sampler

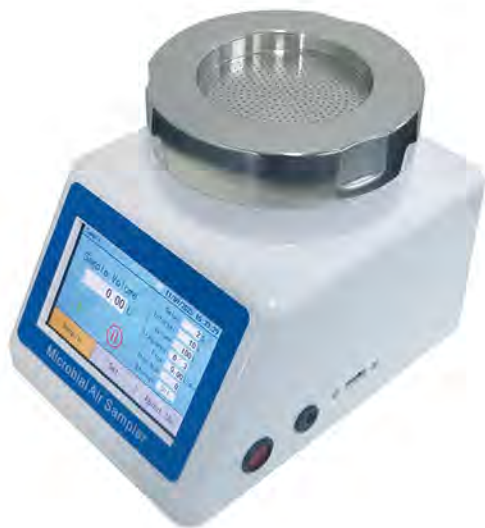

Applications:

It is designed according to the principle of multi jet holes particle impact and isokinetic sampling. And it gets the consistence of animalcule more accurately. It is an ideal air biological sampler for medicine plant, hospital, biological products, food machining, public place, etc.

Features:

- * Sampling hole has many small holes to reduce particles superposition and reduce error of animalcule count.
- * LCD screen displays sampling quantity, sampling time, etc.
- * Sampling time can be set automatically.
- * Easy to change petri dish, just only take down sampling hole to change petri dish. (Diameter: φ90*15mm)
- * With USB interface, can output data easily.
- * Main R &D acquisition chip, sampling flow more stable.

Technical Parameters:

Model	BK-BAS2
Sampling Volume	100L/min, ±5%
Sampling Port	397 mesh, diameter φ0.7mm micropores
Sampling Quantity	1~9999L
Storage Data	5000pcs
Sampling Delay	0~255s(adjustable)
Operating Time on Battery	4h
Power Supply	AC 100~240V, 50/60Hz
External Size(W*D*H)	155*190*155mm
Package Size(W*D*H)	380*175*310mm
Net Weight	1.75kg
Gross Weight	4kg

Microbial Limit Tester



Introduction:

BXD-300 is a device for microbial detection or particle pollution based on the principle of membrane filtration. The microorganism (or particulate matter) in the sample solution is trapped by the filtration effect of the filter membrane. The filter membrane containing microorganisms (or particulate matter) is then transferred into the medium. After the medium was cultured in the incubator, the colonies were counted and identified. Applicable to pharmaceutical, food and beverage, cosmetics, chemical industry, environmental protection water quality monitoring, CDC and so on.

Application:

Widely used in pharmaceutical, cosmetics, water quality monitoring, chemical, CDC, food and beverage industries.

Features:

- * Built-in high-performance diaphragm pump, high flow, low noise.
- * Independent detachable filter head, can be matched with a variety of filter devices.
- * By supporting valve switch, can independently control the flow rate of each filter head.
- * The body adopts 304 mirror stainless steel, conducive to surface sterilization.
- * Detachable filter unit for moist heat sterilization at 121°C.

Technical Parameters:

Model	BXD-300
Filter Bottle	1000ml
Membrane Diameter	Φ50mm
Filter Volume	100ml*3
Air Pump Flow	24L/min
Noise	65dB
Consumption	20W
Power Supply	220/110V , 50/60Hz
External Size	280*215*170mm
Package Size	535*265*290mm
Net Weight	5kg(without filter bottle)
Gross Weight	15kg

Carbon & Sulfur Analyzer



BK-CSA5

Introductions:


High-frequency Infrared Carbon & Sulfur Analyzer can determine the percentage of carbon and sulfur in steel, iron, alloy, nonferrous metal, cement, mineral, glass and other material.

Technical Parameters:


Working Principle	High-frequency inductive combustion and infrared absorption system
Sample Weight (Solid steel)	Standard 0.5g
Accuracy	C/S: 0.1ppm
Analysis Time	25-60s adjustable (normally: 35s)
Working Cycle	24 hours

The difference between BK-CSA5 and BK-CSA6:

Model	BK-CSA5	BK-CSA6
Appearance	Desktop detector, with desktop high-frequency furnace, save space	Separate work station, with vertical high-frequency furnace
Analysis Range	C: 0.0005%-6.0000% (can be extended to 99.999%) S: 0.0005%-0.5000% (can be extended to 99.999%)	C: 0.0001%-10.0000% (can be extended to 99.999%) S: 0.0001%-3.50000% (can be extended to 99.999%)
Analysis Pool	2 pools	2 pools (optional 4 pools)
Consumption	2.2KW	2.5KW
Power Supply	AC220V±10%, 50/60Hz	
Package Size(W*D*H)	1380*760*980mm	1670*750*960mm, 750*580*1430mm
Gross Weight	193kg	150kg, 180kg
Standard Accessories	Main unit, high frequency automatic inductive combustion furnace, electric balance 1000 times effective analysis of spare parts	

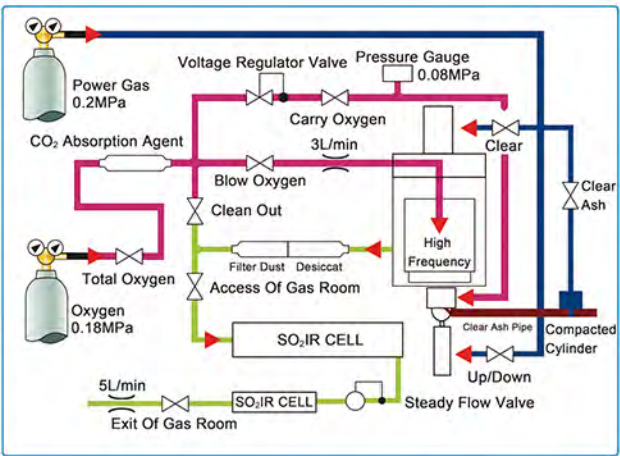

BK-CSA5/BK-CSA6 Gas Circuit Diagram

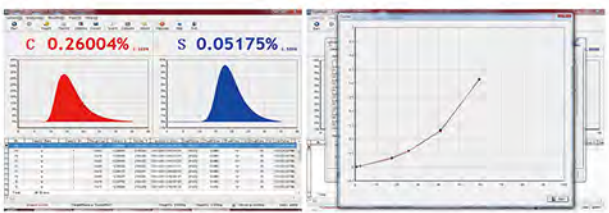

Analysis Software

Using Deliph software compiler, WINDOWS XP, Win7, Win8, Win10 system.
 Using the drop-down menu and shortcut operation, with the functions of multi-user administrator, curve fitting, coefficient correction, treatment of results, printing, system diagnosis and others.

High Frequency Oscillating Circuit
 Current / Voltage / Power / Choosing the way to regulate the furnace temperature, suitable to various materials of samples.



Control Circuit
 Double CPU modular design, high of integration, stable and reliable.
 24 bit high speed sampling chip, high sampling precision.



High Precision Pump
 In response to the input pressure change, to ensure that the analysis of gas flow.
 Constant output, so as to ensure the stable and reliable analysis results.



Infrared Detecting Pool
 Gold-plating carbon sulfur analysis pool and high precision of pyroelectric infrared detector.
 New platinum infrared light source, heating duration, spectral characteristics of high efficiency. Microstepping motor, good thermal stability.



BK-CSA6

COD Analyzer

Features:

- * COD analysis in accordance with EPA 410.4 and ISO 15705:2002 standards.
- * LCD display screen.
- * 2 LED light sources for different COD testing ranges.
- * 2-point calibration.
- * Data capacity of up to 200 sets GLP-compliant.
- * Data stored can be transferred into the computer by USB communication interface.



COD-100

COD-100R Reactor



Features:

- * 21 samples at a time.
- * Settable heating temperature between 100~165 °C .
- * Settable heating time between 0~120 min.
- * Transparent plastic protection shield is equipped to protect the operator.

Technical Parameters:

Model	COD-100
Range	(0~150)mg/L, (0~1500)mg/L
Accuracy	±8%
Repeatability	3%
Fluctuation	6mg/L(20min)
Power Supply	AC220V, 50/60Hz
External Size(W*D*H)	COD-100: 315*225*100mm; COD-100R: 330*228*132mm
Package Size(W*D*H)	COD-100: 370*305*330mm; COD-100R: 575*435*285mm
Net Weight	2kg; 4kg
Gross Weight	4kg; 5.5kg

Portable Turbidimeter



Features:

- * Cold light source, narrowband interference optical system.
- * Large LCD display.
- * Maximum storage capacity: 9,999 records, 250 fixed curves, and 749 user-defined curves.
- * Equipped with a USB port for transferring data records to a computer for file-based storage and printing.
- * Anticorrosive ABS main body, good water and dust resistance.
- * 16-bit single chip microcomputer system.
- * Data protection function of power failure.
- * Could charge lithium-ion battery.

Technical Parameters:

Model	BK-T201	BK-T202
Measuring Range(NTU)	0~400(0~20; 20~100; 100~400NTU)	0~1000(0~20; 20~100; 100~400; 400~1000NTU)
Indication Error(F.S)	≤± 2%	
Repeatability(F.S)	≤± 2%	
Minimum Resolution(NTU)	0.01NTU(0~20); 0.1NTU(20~100); 1NTU(100~400)	0.01NTU(0~20); 0.1NTU(20~100); 1NTU(100~400; 400~1000NTU)
Standard Accessory	Cuvette*3, light shield*1	
Power Supply	AC100~240V, 50/60Hz	
External Size(W*D*H)	80*55*230mm	
Package Size(W*D*H)	410*240*330mm	
Net Weight	1kg	
Gross Weight	2.5kg	

Benchtop Turbidimeter

Features:

- * Measured concentration value can be stored, printed, inquired and uploaded to the computer.
- * Measurement channels can be selected, up to 16 channels (optional, customizable), corresponding to different wavelengths.
- * Measurement method can choose straight line method or broken line method.
- * Various security measures, can set the boot input password.
- * Light intensity can be adjusted, divided into 16 levels, arbitrary Settings.
- * Bilingual system, can be switched between Chinese and English.
- * USB interface, can be connected to the computer.
- * With printing function: test records can be immediately printed or query records printed.



BK-LT6A/BK-LT6B

Technical Parameters:

Model	BK-LT6A	BK-LT6B
Measuring Range(NTU)	0~400	0~1000(0~10; 10~100; 100~400; 400~1000)
Indication Error(F.S)	≤±2%	
Repeatability(F.S)	≤±2%	
Minimum Resolution(NTU)	0.01	
Consumption	30W	
Standard Accessory	Cuvette*2	
Power Supply	AC100~240V, 50/60Hz	
External Size(W*D*H)	380*291*135mm	
Package Size(W*D*H)	480*390*370mm	
Net Weight	2.6kg	
Gross Weight	4.8kg	

BOD Tester



Features:

- * After manually adding the sample solution to be tested,the machine will automatically determinate BOD content in surface water, municipal sewage and industrial waste water.
- * Measurement of BOD in the water with simple and safe mercury-free pressure difference measurement method to prevent mercury poisoning caused by the leakage of mercury column.
- * Choose a 7-inch high-end full-color LCD touch screen with strong reliability, a clear display control interface, full graphics and human-computer interactive operation to provide customers with the most friendly and convenient operation experience.
- * The data can be stored in real time and the data curve can be drawn automatically, without the conversion of the BOD concentration value directly.
- * The test data can be kept without power, and the data of the unexpected power failure data will be saved automatically, and the experimental process will be carried out automatically after the power supply.
- * Intelligent automatic temperature compensation: When the sample temperature is too high or too low, the instrument can wait for the specified delay time to end before starting the measurement, ensuring that the entire testing process is carried out under an appropriate temperature environment.
- * Support 1-6 water samples at the same time, and can detect up to 6 samples at one time.
- * The training time and measurement range can be flexibly set according to actual test requirements, and the maximum support of 4000mg/L water sample is directly tested.
- * The instrument is equipped with the high-end brand mini-thermal line printer, which can quickly print measurement parameters, process data and result data.
- * Extra-large storage can store not less than 10000 sets of test data details, which can be checked by the date of experiment.
- * Support for the on-line processing of test data, and all stored experimental data can be uploaded to the computer by data line.

Technical Parameters:

Model	BK-BOD02
Measurement Range	0-4000mg/L (Subsection Measurement)
Measurement Error	≤ 10%
Sample Quantity	1-6
Storage Space	Test Data Of 10000 Groups
Data Record Interval	24min~12h(Automatically adjusted according to the measurement cycle)
Measurement Period	1-30 Days Adjustable
Display Mode	7-Inch Full-Color LCD Touch Screen
Operation Mode	Touch Screen Full Graphic Human-Computer Interaction Operation
Printer	Thermal printer
Communication Interface	Standard USB
Power Supply	AC100~240V 50/60Hz
Package Size(L*W*H)	Main instrument: 500*450*350mm; Incubation Bottle: 570*410*350mm
Gross Weight	Main instrument: 13kg; Incubation Bottle: 5kg

BOD Tester



BK-BOD804



BK-BOD804S



BK-BOD806S



BK-BOD806



Features:

- * Mercury-free differential pressure method, the experimental process is safe and reliable, and the measurement results are highly accurate.
- * Independent color liquid crystal display, supporting automatic screen-off and one-click wake-up.
- * Each culture bottle operates independently, displays results independently, and is equipped with a large-capacity lithium battery that can be charged independently or charged simultaneously for operation.
- * The measurement results do not require conversion and are directly displayed as BOD concentration. The detection data is automatically printed.
- * The measurement range is wide, with 10 segmented ranges built-in.
- * Automatically generate color data charts, making the detection process more intuitive and clear.
- * Automatically record data, making it convenient to view current and historical data in real time.

Technical Parameters:

Model	BK-BOD804	BK-BOD806	BK-BOD804S	BK-BOD806S
Samples Quantity	4 pieces/batch	6 pieces/batch	4 pieces/batch	6 pieces/batch
Test Head Color	Yellow/ blue/ green(Default color: Yellow)			
Main Display	Color independent display screen		5-inch color touch screen	
Secondary Display	/		1.5-inch color LCD	
Measuring Range	0~4000mg/L			
Stirring Method	Electromagnetic			
Working Method	Work independently			
Resolution	0.1mg/L			
Measurement Period	5 days			
Accuracy	±8%			
Culture Temperature	20℃±1℃			
Data Storage	10,000 groups			
Data Record	1h/time			
Consumption	20W			
Power Supply	AC220, 50/60Hz(Standard); AC110, 50/60Hz(Optional)			
External Size(W*D*H)	200*300*150mm	300*300*150mm	200*300*150mm	300*300*150mm
Net Weight	5kg	6kg	5kg	6kg
Packing Size(W*D*H)	530*450*320mm	530*450*320mm	530*450*320mm	530*450*320mm
Gross Weight	9kg	10kg	9kg	10kg

Total Organic Carbon Analyzer



BK-TOC1500



BK-TOC1700

Features:

- * Equipped with conductivity detector to quantify TOC concentration.
- * BK-TOC1700 is able to work under on-line mode to realize real-time monitoring.
- * Ideal choice to measure and monitor microelectronics water, purified water, water for injection, etc.
- * Automatic sample introduction with one-button setting, no sample contamination, no harm on operator and environment.
- * UV oxidation by UV lamp, no need to add acid, gas or catalytic, greatly reduces the experiment and maintenance cost.
- * 7 inches touch screen with smart UI, easy to operate and read test data.
- * Two software options are available:one is the regular software and the other is the TOC-Lab software which complies with FDA-21 CFR Part11 requirements and USP, EP, JP and CHP.
- * Auto sampler is optional according to different experiment requirements.
- * Online and offline mode can be easily switched. (BK-TOC1700).
- * 8GB large storage capacity, no restriction of data and time.
- * Quick test, each analysis takes less than 3 minutes.
- * All historical records can be traced by searching test date.
- * Data can be retrieved and saved to USB directly.
- * Equipped with Bluetooth printer for quick and easy data printing.
- * Modular design for quick installation and easy maintenance.

Technical Parameters:

Model	BK-TOC1500	BK-TOC1700
Work Model	Offline	Online and offline
Detection Range	0.001~1.5mg/l	
Detection Limit	1ppb	
Max Tolerance	±5%	
Analysis Time	3 min	
Response Time	Within 10 min	
Sample Temperature	1~95°C	
Sample Flow Speed	2ml/min	
Repeatability Tolerance	≤3%	
Drifting	±5%	
Environment Temperature	10-40°C with temperature change±5°C/d	
Relative Humidity	≤85%	
Standard Accessories	Bluetooth printer(default) or regular software	
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional)	
Consumption	100W	
External Size(W*D*H)	440*220*300mm	440*220*405mm
Net Weight	11kg	12.25kg
Package Size(W*D*H)	640*490*440mm	640*490*440 mm
Gross Weight	16kg	19kg

Total Organic Carbon Analyzer



Features:

- * NDIR detector, high sensitivity and stability.
- * Automatic leakage detection system not only avoids the misoperation, but also improves device performance and safety.
- * Optional autosampler.
- * Multi-functional PC software.
- * Precise gas flow control technology improves accuracy.
- * Modular design, simplifying device operation and maintenance.
- * TOC-LAB software is optional, which complies with FDA-21 CFR Part11 requirements and USP.

Technical Parameters:

Model	BK-TOC3000
Method	Wet Chemical Oxidation By UV
Detector	NDIR
Parameters	TC, TIC, TOC, NPOC
Gas Requirement	Nitrogen ≥ 99.995%
Measurement Range	0~10000mg/l(ppm)
Detection Limit	5µg/l(ppb)
Operation Mode	PC software Controlled
Application	Liquid Sample
Repeatability	3%
Maximum Salinity	85g/l
Power Supply	AC220V, 50/60Hz(Standard); AC110V, 50/60Hz(Optional, external transformer)
Consumption	200W
External Size(W*D*H)	460*360*450mm
Net Weight	25kg
Package Size(W*D*H)	660*610*680 mm
Gross Weight	45kg

Total Organic Carbon Analyzer



Features:

- * Auto sample dilution, auto acid-adding and auto gas purging(BK-TOC5000RD).
- * 680°C catalytic oxidation technology with platinum catalyst, especially for seawater test.
- * NDIR detector, high sensitivity and stability.
- * Optional autosampler.
- * Multi-functional PC software.
- * Precise gas flow control technology improves accuracy.
- * PID temperature controlling technology, ensure higher accuracy.
- * Unique three-stage dehydration technology improves drying efficiency.
- * Personalized standard curve management provides great convenience for users.
- * Consumables management reminds users to replace consumables in time.
- * Modular design, simplifying device operation and maintenance.
- * TOC-LAB software is optional, which complies with FDA-21 CFR Part11 requirements and USP.

Introduction:

Total Organic Carbon (TOC) analyzer is an instrument used for the accurate determination of the total amount of organic carbon in a sample. Its core principle involves converting the organic carbon in the sample into easily detectable carbon dioxide (CO₂), followed by quantitative analysis of CO₂ to infer the TOC content in the sample. Widely applied in various fields such as water quality monitoring, environmental governance, food and pharmaceuticals, and electronic semiconductors, this instrument is a key device for assessing the degree of organic pollution, purity, and quality control of samples.

Technical Parameters:

Model	BK-TOC5000RN	BK-TOC5000RD
Measurement Method	High Temperature Catalytic Combustion	
Detector	NDIR	
Analysis Parameter	TC, TIC, TOC, NPOC	
Control Mode	PC software controlled	
Gas Requirement	Oxygen, purity ≥99.995%	
Sample Type	Liquid sample (AS-W20 is optional.)	
Measurement Range	0~1000mg/L, can extend to 0~100,000mg/L (Manually dilution)	0~1000mg/L, can extend to 0~100,000mg/L (Automatically dilution)
Limit of Detection	TC: 50µg/L; IC: 20µg/L	
Measuring Time	TC: around 4min; IC: around 3min	
Max. Permissible Error	TOC: ± 5%; IC: ± 4%	
Repeatability	≤3%	
Injection Volume	TC: 100~500µl; IC: 100~2000µl	
Optional Accessories	Autosampler for liquid sample or solid sample, Enhanced Halogen Removal Device, Enhanced Halogen Removal Device-Metal Wire Mesh	
Power Supply	AC220V±10%, 50/60Hz(Standard); 110V±10%, 50/60Hz(Optional)	
Consumption	700W	
Package Size(W*D*H)	Main Machine: 780*710*610mm; Accessories: 710*230*600mm	
Gross Weight	Main Machine: 59kg; Accessories: 7kg	Main Machine: 63kg; Accessories: 8kg

Colorimeter



BCM-110



BCM-200

Features for BCM-110:

- * Built-in white plate parameters. No need to calibrate each time.
- * Double locating: illuminating locating and precise cross locating.
- * Switchable double measurement end face: large area stable end face and small area measurement for concave-convex end face.
- * New integrating sphere optical path design: eliminating the stray light of main optical path and auxiliary optical path.
- * Equipped with rechargeable-capacity Li-ion battery.
- * Configured CQCS3 software to realize more functions by connecting PC computer.
- * Hand-head structure, small and convenient.

Features for BCM-200:

- * Leading Humanity Design and Convenient Operation, Auto White and Black Calibration at Startup, Structure Design in line with Ergonomics.
- * Stable Measurement Performance.
- * Convenient and Fast Locating.
- * PC Software -CQCS3 Software realize more function expansion.
 - a. The corresponding software serial number and password protection.
 - b. Be able to perform color difference analysis, color difference cumulative analysis, chromaticity index, color sample database management, simulating object color, etc.
- * Advanced Power Management Design.
 - a. Using high capacity Li-ion battery in colorimeter. It can be repeatedly charged.
 - b. Measuring more than 3000 times on one charge.

Technical Parameters:

Model	BCM-110	BCM-200
Illuminating/Viewing Geometry	8/d	
Measuring Aperture	Φ4mm	Φ8mm
Detector	Silicon photoelectric diode	
Color Space	CIEL*a*b*C*h* CIEL*a*b*CIEXYZ	
Color Difference Formula	ΔE*ab ΔL*a*b ΔE*C*h	
Light Source	D65	
Light Source Device	LED blue light excitation	
Display	TFT LCD	
Errors Between Each Equipment	≤0.80ΔE*ab	≤0.50ΔE*ab
Storage	100pcs standards, 20000pcs samples	
Repeatability	Standard deviation within AE*ab 0.08	Standard deviation within AE*ab 0.07
	Average of 30 measurements of standard white plate	Average of 30 measurements of standard white plate
Lamp Life	5 years, more than 1.6 million time	
Charging Time	8 hours-100% electricity	
Measurement Times Before Recharging	3000 times in 8 hours	
Ambient Temp./Humidity Range	-10~40°C, relative humidity 0~85% without condensation	
Data Interface	USB	
Optional Accessory	Miniature thermal printer,	Universal test components, powder
	powder test box	test box, miniature thermal printer
Power Supply	Rechargeable li-ion battery 3.7V@3200mAh	
External Size(W*D*H)	205*67*80mm	205*70*100mm
Package Size(W*D*H)	370*320*160mm	
Net Weight	0.45kg	0.5kg
Gross Weight	4kg	

Spectrophotometric Colorimeter



Application:
Spectrophotometric colorimeter is widely used in plastic, electronic, painting, coating, ink, textile, garment, printing and dyeing, food, medical, cosmetic, industries, scientific research institutes, schools and laboratories. It can measure reflectance spectrum and other color index precisely. BCM-810 spectrophotometer not only can help to perform color matching and color management studies, but also can control product quality management accurately. The instrument is equipped with high-end color management software which can connect PC to achieve more extension functions.

Technical Parameters:

Model	BCM-810
Illumination/Observation System	d/8(diffused illumination, 8-degree viewing angle) Conforms to CIE No.15, GB/T 3978
Integrating Sphere Size	Φ58mm
Light Source	Combined LED sources
Sensor	Silicon photodiode array
Wavelength Range	400~700nm
Wavelength Pitch	10nm
Reflectance Range	0~200%
Measuring Aperture	Φ8mm
Color Space	CIE LAB, XYZ, Yxy, LCh, CIE, LUV
Color Difference Formula	ΔE*ab, ΔE*uv, ΔE*94, ΔE*cmc(2:1), ΔE*cmc(1:1), ΔE*00
Other Chromaticity Data	WI(ASTM E313, CIE/ISO, AATCC, Hunter), YI(ASTM D1925, ASTM 313), metamerism index(Mt), color strength, color stain, color fastness, opacity
Observer	2°/10°


Model	BCM-810
Illuminant	D65, D50, A, C, D55, D75, F1, F2(CWF), F3, F4, F5, F6, F7(DLF), F8, F9, F10(TPL5), F11(TL84), F12(TL83/U30)
Display Data	Spectral value/Graph, Colorimetric value, Color difference value/Graph, Pass/Fail result, Color offset, Color simulation
Measurement Time	1.5s
Repeatability	Spectral reflectance: Standard deviation within 0.1% Colorimetric value: Standard deviation within ΔE*ab 0.04 (Measurement conditions: White calibration plate measured 30 times at 5 seconds intervals after white calibration was performed.)
Inter Instrument Agreement	Within ΔE*ab 0.2 (Average for 12 BCRA Series II color tiles)
Battery	Li-ion battery. 2800 times within 8 hours.
Lamp Life	5 years, more than 1.6 million measurements
Display	3.5 inch TFT LCD, Capacitive touch screen
Interface	USB/RS-232
Data Memory	1000 Standards, 15000 Samples
Ambient Temp.	0~40℃ (32~104°F)
Storage Temp.	-20~50℃ (-4~122°F)
Standard Accessory	Power adapter, Li-ion battery, operating instruction, PC software(Download from office website), data line, white and black calibration cavity, protective cover, wrist strap
Optional Accessory	Universal test components, micro printer, powder test box
External Size(W*D*H)	90*77*230mm
Package Size(W*D*H)	370*170*310mm
Net Weight	600g
Gross Weight	3kg
Notes	The specifications are subject to change without notice

Benchtop Grating Spectrophotometer



Introduction:

The instrument is the bench-top spectrophotometer with excellent repeatability, which is with auto calibration function to guarantee the short term and long-term repeatability even after drastic changes in the environment. Advanced automatic calibration technology greatly improves long-term repeatability of instruments. Under constant temperature, the dE*ab of day 1 and day 30 can still reach 0.015. At any temperature change from 0°C to 40°C, dE*ab can reach less than 0.1.

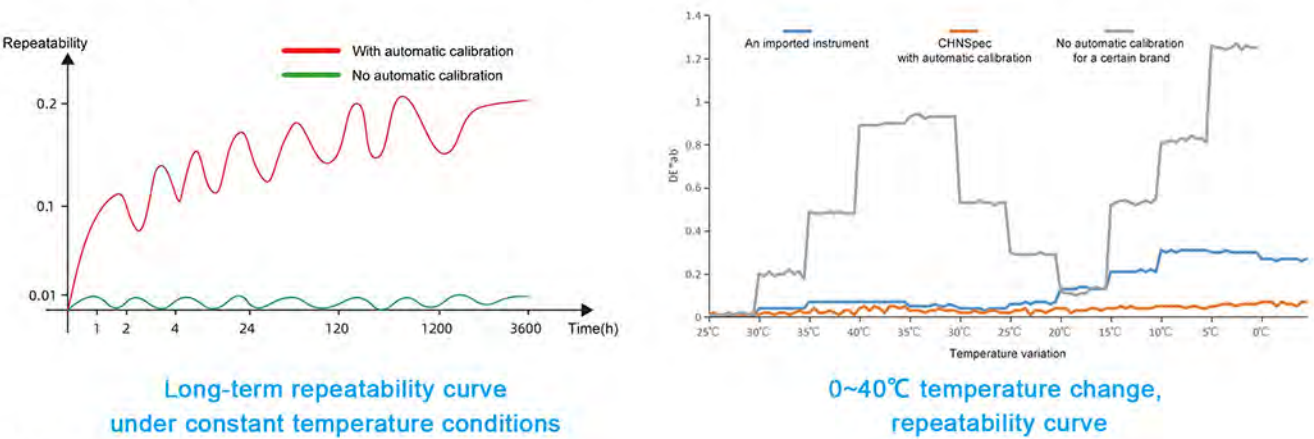

Features:

- * High precision automatic calibration, excellent long-term repeatability, ensure excellent measurement repeatability even after environment changes
- * It has two lamps: pulsed xenon and LED
- * 24 kinds of illuminants and more than 40 measurement indices
- * Temperature and humidity compensation function
- * 7-inch touch screen, Android operate system
- * Dual optical paths spectrum analysis technology
- * Support SCI+SCE simultaneous rapid measurement

Technical Parameters:


Model	BK-GS821
Optical Geometry	Reflectance: d/8(Diffused illumination, 8-degree viewing) Simultaneous measurement of SCI/SCE, conform to CIE No.15, GB/T 3978, GB 2893, GB/T 18833, ISO7724/1, DIN5033 Teil7, JIS Z8722 condition C, ASTM E1164, ASTM-D1003-07 Transmittance d/0(Diffused illumination, 0-degree viewing)
Integrating Sphere Size	152mm
Light Source	Pulse Xenon lamp and LED lamp
Spectrophotometric Mode	Concave Grating
Sensor	Silicon Photodiode Array
Wavelength Range	360~780nm
Wavelength Interval	10nm
Measured Reflectance Range	0-200%, resolution 0.01%

Measuring Aperture	Reflectance: XLAV Φ25.4mm/Φ30mm, LAV Φ15mm/Φ18mm, MAV Φ8mm/Φ11mm, SAV Φ3mm/Φ6mm Users can customize the caliber, automatic identification of caliber switching Transmittance: Φ17mm/Φ25mm
Color Space	CIE LAB, CIE LUV, LCh, Hunter Lab, Yxy, XYZ, Musell, s-RGB, βxy
Color Difference Formula	ΔE*ab, ΔE*CH, ΔE*uv, ΔE*cmc, ΔE*94, ΔE*00, ΔEab(Hunter), 555 color classification
Other Colorimetric Index	WI(ASTM E313-00,ASTM E313-73,CIE,ISO2470/R457, AATCC, Hunter, Taube Berger, Stensby),YI(ASTM D1925,ASTM E313-00,ASTM E313-73), Tint(ASTM E313-00),Metamerism index milm, Stain fastness, Color fastness, ISO brightness, R457, A density, T density, E density, M density, APHA/Pt-Co/Hazen, Gardner, Saybolt, ASTM color, Haze, Total Transmittance, Opacity, Color Strength
Observer Angle	2° and 10°
Illuminant	A, B, C, D50, D55, D65, D75, F1, F2, F3, F4, F5, F6, F7, F8, F9, F10, F11, F12, CWF, U30, U35, DLF, NBF, TL83, TL84, ID50, ID65, LED-B1, LED-B2, LED-B3, LED-B4, LED-B5, LED-BH1, LED-RGB1, LED-V1, LED-V2
Displayed Data	Spectral data, spectral graph, chromaticity data, color difference data, color difference graph, pass/fail judgment, simulated color, color evaluation, haze, liquid chromaticity, color bias
Measuring Time	Single mode < 2s
Repeatability	ΔE*ab≤0.015, Spectral reflectance/transmittance≤0.1%
Inter-instrument Error	XLAV ΔE*ab 0.2
Display	7-inch capacitive touch screen
Spectral Resolution	1.6nm
UV Measurement	Including UV, 400nm cutoff, 420nm cutoff, 460nm cutoff
Transmission Measurement Specification	Sample height and thickness: unlimited height, thickness ≤50mm
Long Term Repeatability	XLAV chromaticity value: standard deviation ΔE*ab within 0.015 (Any temperature change at 20°C±10°C, measure the white calibration plate every hour within 24 hours)
Data Storage	8 GB
Language	Simplified Chinese, English, Traditional Chinese, Russian, Spanish, Portuguese, Japanese, Thai, Korean, German, French, Polish
Operation System	Android
Operating Temperature &Humidity Range	5~40°C (40~104F), relative humidity 80% (at 35°C) no condensation
Storage Temperature &Humidity Range	-20~45°C (-4~113F), relative humidity 80% (at 35°C) no condensation
Standard Accessories	Power adapter, data cable, transmission fixture, USB flash disk, Black cavity, white board, green board, 30mm aperture, 18mm aperture, 11mm aperture, 6mm aperture, support table, colorimetric dish, damping handle
Optional Accessories	Heating Fixture for Transmittance, Vertical Support and Pneumatic ram for downward measurement, Reflectance fixture for small size sample, Reflectance Glass Cell Support, Corrosion-Resistant Protective Plate (non-removable), Sample Holder for Fiber, Film Fixture, Transmittance Fixture for Small Aperture, Trolley Case, European Standard Plug, American Standard Plug
Interface	RS-232, USB, USB-B
Other Function	1. Camera to view measurement area 2. Support horizontal, vertical and downward measurement method (need optional accessories to support for downward measurement) 3. Auto humidity and temperature compensation function
Power Supply	AC100~240V, 50/60Hz, DC regulated power supply
Packing Size	450*570*470mm
Gross Weight	16kg


Whiteness Meter



BK-WM1

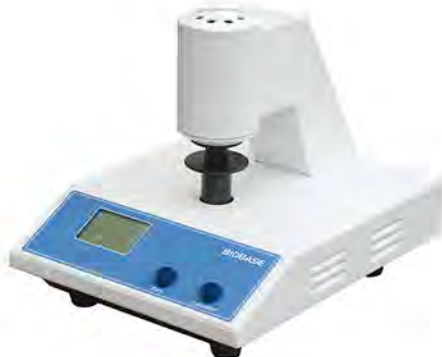

BK-WM2

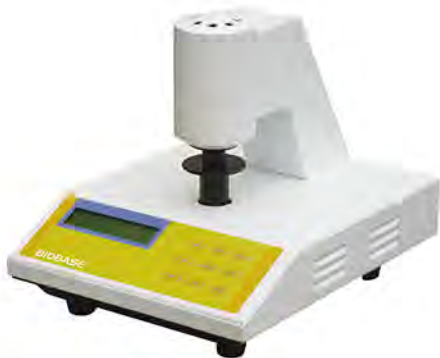

BK-WM2A



BK-WM3 & BK-WM3A

Introduction:

Whiteness meter with the digital display is mainly applicable for the measurement of the whiteness degree on the surface of the object or the powder in the white color and the color close to white. The whiteness degree can be accurately educed that is consistent with the visual degree. The opacity degree of the paper can also be accurately measured. This instrument can be widely applied for the measurement of the whiteness degree of the objects like textile & printing & dying, oil paint & dope, chemical construction material, paper & paper plate, plastic product, white cement, ceramics, porcelain enamel, porcelain clay, french chalk, starch, flour, salt, wash, and cosmetics, etc.

Features for BK-WM1:

- * AC & DC power supply, low power consumption, cabinet and handsome contour design, facilitating field and lab use.
- * Microcomputer, LCD liquid crystal with backlight display, low voltage warning, and the device will automatically shut down after 10 minutes of no operation.
- * Automatic zeroing and correction, averaging measurement function. Stable measurement data, good repeatability and small error.
- * Equipped with high-efficiency long-life LED light sources, maintenance-free operation is achieved.
- * It can start working normally after a 30-second warm-up and is equipped with a USB data output interface.

Features for BK-WM2:

- * The design with the reliable active platform, can effectively prevent the phenomenon of the light leak in the measurement hole.
- * The simple operation, and can accurately measure the opacity degree of the paper.
- * Adopt the standard white plate rated by the central government to convey the standard value, and the measurement is accurate and reliable.

Features for BK-WM2A:

- * The configuration with the high-automatic & multi-function microcomputer, equipped with the RS232 serial communication interface to connect the printer.
- * The overall spectrum characteristics of the instrument comply with the responding curve of the CIE standard observer, and can accurately obtain the ISO whiteness degree.
- * High stability and reproducibility, completely eliminating system drift error, with data storage and query functions, meeting GLP requirements.
- * Equipped with data storage and query functions, as well as fully automatic calibration.

Features for BK-WM3 and BK-WM3A:

- * Adopt the quality imported & original components, with the high-efficiency & low-spoilage circuit, and with the good reliability.
- * The configuration with the high-automatic & multi-function microcomputer, equipped with the RS232 serial communication interface to connect the printer.
- * The overall spectrum characteristics of the instrument comply with the responding curve of the CIE standard observer, and can accurately obtain the ISO whiteness degree.
- * Nonlinear data processing and data smoothing functions, rapid automatic multi-point calibration, self-diagnostic information prompts, fast and stable response, maintenance-free reliable operation.
- * High stability and reproducibility, completely eliminating system drift error, with data storage and query functions, meeting GLP requirements.
- * Equipped with data storage and query functions, as well as fully automatic calibration.

Technical Parameters:

Model	BK-WM1	BK-WM2	BK-WM2A	BK-WM3	BK-WM3A
Measuring Range	0~199		0~120		
Measuring Condition	45/0			0/d	d/0
Illuminant	D65	/			
Display	LCD				
Whiteness Mean	Whiteness degree of blue light Wb = R457				
Minimum Readout	0.1		0.01		
Calibrate	Φ15	Φ30			
Zero Drift	≤±0.1				
Indication Error	≤±2.5	≤±1			
Repeatability	0.2				
Power Supply	AC 220V, 50/60Hz; DC 7.5V, 0.2A(1.5V AA alkaline dry battery*5), power supply adapter	AC220V, 50/60Hz; 110V, 50/60Hz			
External Size(W*D*H)	235*75*65mm	325*265*280mm		310*280*280mm	
Package Size(W*D*H)	370*285*175mm	400*330*345mm		370*355*380mm	
Net Weight	0.8kg	4kg	4.56kg	3.1kg	
Gross Weight	1.8kg	5kg	5.56kg	4.1kg	

IVC Mouse Cage System

Features:

* IVC mouse cage system is composed of three parts: cage box, cage frame and main machine.

Main Machine



- * PLC or MCU control, inlet and exhaust fans are well-known domestic brands, stable and reliable operation.
- * With high-precision wind speed pressure difference sensor, temperature and humidity sensor.
- * Built-in UPS, the fan continues working when the external power supply interrupted.
- * With filter timing function to remind users to update the filter.
- * With abnormal parameters alarm, filter life alarm, power failure alarm.
- * Supporting remote monitoring through computer or mobile phone(PLC).

Main Machine Technical Parameters:

Ventilation Rate	10~85 times/h
Airflow Velocity	≤0.1m/s
Air Cleanliness	ISO Level 5
Noise	≤55dB
Colony Number	0
Pressure Difference	≥10pa
Power Supply	110~220V, 50/60Hz
External Size	470*605*1550mm
Package Size	570*705*1700mm
Gross Weight	105kg

Cage Frame



- * Cage frame material is SUS304 stainless steel.
- * The gas pipe and the cage box are connected by a silicone gas nozzle. The inlet and exhaust vents of the cage box and cage frame adopt non-invasive structure.
- * Inlet and exhaust duct can be disassembled for easy cleaning and disinfection.
- * 4-inch PU wear-resistant universal wheel, no scratching PVC floor, flexible movement without noise. The arc angle structure prevents the damage of the during handling.
- * The vertical and horizontal positions of the cage frame are numbered with letters such as A, B, C and numbers such as 1, 2, 3, which is convenient for experiment management.
- * The cage guide rail is made of ABS engineering plastic, and with instructions for cage installation in place (if not in place, there are light instructions to remind the operator).

Cage Box



- * The cage box is composed of plastic base box, box cover, stainless steel mesh cover, drinking bottle and record card. The box cover has exhaust valve, silicone sealing circle and hasp.
- * Base box and cover are molded by PPSU or PSU plastic. PPSU thermal deformation temperature>180℃, steam sterilization for more than 500 times without deformation on condition that 205 kPa, 134℃, 5min. Thermal deformation temperature of PSU material> 150℃, steam sterilization over 200 times without deformation on condition that 205 kPa, 134℃, 5min.
- * The cage box and 500ml drinking bottle are autoclavable.
- * The box cover exhaust outlet is provided with a metal filter (25*50mm) to prevent the dust in the cage from being inhaled the cage frame and blocking the pipeline.
- * The ventilated window is directly connected to the outside world, covered with 0.2μm high efficiency filter membrane, which can be directly washed and autoclavable.
- * After the cage box is removed from the cage frame, the air inlet and exhaust valves of the cage box will automatically close immediately.

Rat IVC Cage System




Introduction:

The rat IVC cage system is composed of intelligent main machine, cage frame, cage box and other parts. It is suitable for feeding and experiment of clean grade or SPF grade less harmful infected rats, especially suitable for raising immunodeficient and transgenic animals, to effectively ensure the safety of operators, animals and the environment.

Technical Parameters:

Model	Cage Number (pc)	Cage Frame Size (L*W*H)mm	Cage Size (L*W*H)mm	Packing Information			
				Main Unit Packing Size (L*W*H)mm	Main Unit Gross Weight(kg)	Cage Frame &Cage Packing Size(L*W*H)mm	Cage Frame &CageGross Weight(kg)
BK-IVC-SL500-24(4*6)-1	24	1186*540*1945	500*274*226	754*620*2060	115	1706*670*2162	107
BK-IVC-SL500-30(5*6)-1	30	1475*540*1945	500*274*226	754*620*2060	115	1995*670*2162	126
BK-IVC-SL500-36(6*6)-1	36	1764*540*1945	500*274*226	754*620*2060	115	2284*670*2162	145
BK-IVC-SL500-48(4*6)-2	48	1186*540*1945	500*274*226	754*620*2060	115	1706*1210*2162	205
BK-IVC-SL500-60(5*6)-2	60	1475*540*1945	500*274*226	754*620*2060	115	1995*1210*2162	241
BK-IVC-SL500-72(6*6)-2	72	1764*540*1945	500*274*226	754*620*2060	115	2284*1210*2162	278

Mouse IVC Cage System

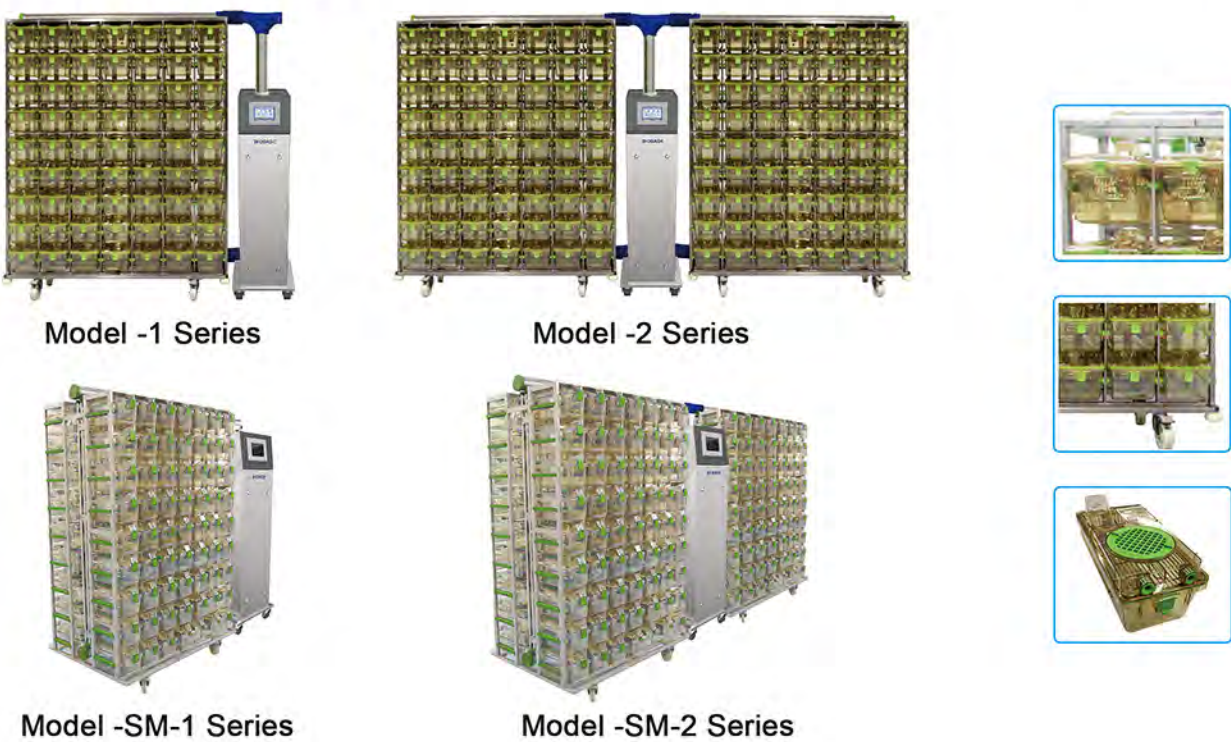

Introduction:

It is composed of intelligent main machine, cage frame, cage box and so on. It is suitable for feeding and experiment of clean grade or SPF grade less harmful infected mice, to effectively ensure the safety of operators, animals and the environment.

Technical Parameters:

Model	Cage Number (pc)	Cage Frame Size (L*W*H)mm	Cage Size (L*W*H)mm	Packing Information			
				Main Unit Packing Size (L*W*H)mm	Main Unit Gross Weight(kg)	Cage Frame &Cage Packing Size(L*W*H)mm	Cage Frame &Cage Gross Weight(kg)
BK-IVC-SL385-32(4*8)-1	32	806*490*1812	400*179*166	754*620*2060	115	1326*620*2029	105
BK-IVC-SL385-36(4*9)-1	36	806*490*2005	400*179*166	754*620*2060	115	1326*620*2222	111
BK-IVC-SL385-40(5*8)-1	40	1000*490*1812	400*179*166	754*620*2060	115	1520*620*2029	119
BK-IVC-SL385-45(5*9)-1	45	1000*490*2005	400*179*166	754*620*2060	115	1520*620*2222	125
BK-IVC-SL385-48(6*8)-1	48	1194*490*1812	400*179*166	754*620*2060	115	1714*620*2029	133
BK-IVC-SL385-54(6*9)-1	54	1194*490*2005	400*179*166	754*620*2060	115	1714*620*2222	139
BK-IVC-SL385-56(7*8)-1	56	1388*490*1812	400*179*166	754*620*2060	115	1908*620*2029	143
BK-IVC-SL385-63(7*9)-1	63	1388*490*2005	400*179*166	754*620*2060	115	1908*620*2222	150
BK-IVC-SL385-64(8*8)-1	64	1582*490*1812	400*179*166	754*620*2060	115	2102*620*2029	159
BK-IVC-SL385-72(8*9)-1	72	1582*490*2005	400*179*166	754*620*2060	115	2102*620*2222	165
BK-IVC-SL385-72(9*8)-1	72	1776*490*1812	400*179*166	754*620*2060	115	2296*620*2029	169
BK-IVC-SL385-81(9*9)-1	81	1776*490*2005	400*179*166	754*620*2060	115	2296*620*2222	176
BK-IVC-SL385-96(6*8)-SM-1	96	1194*890*1812	400*179*166	754*620*2060	115	1714*1020*2029	169
BK-IVC-SL385-108(6*9)-SM-1	108	1194*890*2005	400*179*166	754*620*2060	115	1714*1020*2222	180
BK-IVC-SL385-112(7*8)-SM-1	112	1388*890*1812	400*179*166	754*620*2060	115	1908*1020*2029	186
BK-IVC-SL385-126(7*9)-SM-1	126	1388*890*2005	400*179*166	754*620*2060	115	1908*1020*2222	198
BK-IVC-SL385-128(8*8)-SM-1	128	1582*890*1812	400*179*166	754*620*2060	115	2102*1020*2029	204
BK-IVC-SL385-144(8*9)-SM-1	144	1582*890*2005	400*179*166	754*620*2060	115	2102*1020*2222	216
BK-IVC-SL385-144(9*8)-SM-1	144	1776*890*1812	400*179*166	754*620*2060	115	2296*1020*2029	231
BK-IVC-SL385-96(6*8)-2	96	1194*490*1812	400*179*166	754*620*2060	115	1714*1110*2029	256
BK-IVC-SL385-108(6*9)-2	108	1194*490*2005	400*179*166	754*620*2060	115	1714*1110*2222	268
BK-IVC-SL385-112(7*8)-2	112	1388*490*1812	400*179*166	754*620*2060	115	1908*1110*2029	275
BK-IVC-SL385-126(7*9)-2	126	1388*490*2005	400*179*166	754*620*2060	115	1908*1110*2222	288
BK-IVC-SL385-128(8*8)-2	128	1582*490*1812	400*179*166	754*620*2060	115	2102*1110*2029	305
BK-IVC-SL385-144(8*9)-2	144	1582*490*2005	400*179*166	754*620*2060	115	2102*1110*2222	318
BK-IVC-SL385-144(9*8)-2	144	1776*490*1812	400*179*166	754*620*2060	115	2296*1110*2029	325
BK-IVC-SL385-162(9*9)-2	162	1776*490*2005	400*179*166	754*620*2060	115	2296*1110*2222	338
BK-IVC-SL385-192(6*8)-SM-2	192	1194*890*1812	400*179*166	754*620*2060	115	1714*1910*2029	327
BK-IVC-SL385-216(6*9)-SM-2	216	1194*890*2005	400*179*166	754*620*2060	115	1714*1910*2222	351
BK-IVC-SL385-224(7*8)-SM-2	224	1388*890*1812	400*179*166	754*620*2060	115	1908*1910*2029	361
BK-IVC-SL385-252(7*9)-SM-2	252	1388*890*2005	400*179*166	754*620*2060	115	1908*1910*2222	384
BK-IVC-SL385-256(8*8)-SM-2	256	1582*890*1812	400*179*166	754*620*2060	115	2102*1910*2029	396
BK-IVC-SL385-288(8*9)-SM-2	288	1582*890*2005	400*179*166	754*620*2060	115	2102*1910*2222	420
BK-IVC-SL385-288(9*8)-SM-2	288	1776*890*1812	400*179*166	754*620*2060	115	2296*1910*2029	450

Guinea-pig IVC Cage System



Technical Parameters:

Model	Cage Number (pc)	Cage Frame Size (L*W*H)mm	Cage Size (L*W*H)mm	Packing Information			
				Main Unit Packing Size (L*W*H)mm	Main Unit Gross Weight(kg)	Cage Frame &Cage Packing Size(L*W*H)mm	Cage Frame &CageGross Weight(kg)
BK-IVC-SL520-16(4*4)-1	16	1638*580*1476	520*389*270	754*620*2060	115	2158*710*1693	121
BK-IVC-SL520-20(4*5)-1	20	1638*580*1781	520*389*270	754*620*2060	115	2158*710*1998	142
BK-IVC-SL520-32(4*4)-2	32	1638*580*1476	520*389*270	754*620*2060	115	2158*1290*1693	234
BK-IVC-SL520-40(4*5)-2	40	1638*580*1781	520*389*270	754*620*2060	115	2158*1290*1998	274

Rabbit IVC Cage System



Technical Parameters:

Model	Cage Number (pc)	Cage Frame Size (L*W*H)mm	Cage Size (L*W*H)mm	Packing Information			
				Main Unit Packing Size (L*W*H)mm	Main Unit Gross Weight(kg)	Cage Frame &Cage Packing Size(L*W*H)mm	Cage Frame &CageGross Weight(kg)
BK-IVC-TL520-12(3*4)-1	12	1236*580*2026	520*385*415	754*620*2060	115	1756*710*2243	116
BK-IVC-TL520-16(4*4)-1	16	1638*580*2026	520*385*415	754*620*2060	115	2158*710*2243	145
BK-IVC-TL520-24(3*4)-2	24	1236*580*2026	520*385*415	754*620*2060	115	1756*1290*2243	223
BK-IVC-TL520-32(4*4)-2	32	1638*580*2026	520*385*415	754*620*2060	115	2158*1290*2243	279

Mouse Cage



Features:

- * Separate the feces and urine, easy to operate.
- * Standard accessories: lids, bottles and stoppers
- * Water bottle rack with a stainless steel tube below, to avoid the mouse when the water leakage to the ground.

Technical Parameters:

Model	Material	Size
BK-CP3	PP/PC	318*202*136mm
BK-CP5	PP/PC	300*200*130mm
BK-SS4	PP	485*350*200mm
BK-R1	PP	465*300*180mm
		465*300*150mm
BK-R5	PP/PC	545*395*200mm
BK-H1	PP	375*330*190mm
BK-CP4	PP/PC	466*314*200mm
BK-JM1	PP	320*220*160mm
BK-JM2	PP	375*270*160mm

Densimeter
Solid Densimeter



- Application:**
Any type of solid, such as rubber, plastic, cables, hard alloy, glass, metal, powder, ceramics, fireproofing materials, magnetic materials, mineral and rock, cement, jewelry, etc.
- Features:**
 - * Automatic zero tracking, buzzer warning, and overload warning.
 - * Function of solution compensation: necessary if liquid other than water is used as a medium for measuring.
 - * RS-232C included.

Technical Parameters:

Model	BK-DME300S	BK-DME600S
Capacity	0.005~300g	0.005~600g
Density Resolution	0.001g/cm ³	
Density Range	0.001~99.999g/cm ³	
Measuring Time	About 5s	
Measuring Principle	Archimedes principle	
Specific Gravity Measuring Frame	Unibody injection forming professional specific gravity measurement frame	
Measuring Tank	Unibody injection forming transparent measuring tank Size: 153*107*93mm(L*W*H)	
Standard Accessories	Tank, testing board, tweezer, thermometer, 100G weight, windshield, a set of particle measuring assembly, a set of floating body measuring assembly, power transformer.	
Optional Accessories	DE-40 printer	
Power Supply	AC 100~240V, 50/60Hz	
External Size(W*D*H)	195*230*197mm	
Package Size(W*D*H)	440*180*345mm	
Net Weight	1.78kg	1.79kg
Gross Weight	4.5kg	

Liquid Densimeter



- Application:**
Any type of liquid.
Measurement of special liquid such as volatile liquid, corrosive liquid, strong acid and strong alkali liquid need optional accessory DE-20B anti corrosive liquid measuring assembly.
- Features:**
 - * LCD Display.
 - * Samples under the temperature from normal to 100℃ can be measured.
 - * RS-232C included.

Technical Parameters:

Model	BK-DME300L
Capacity	0.005~300g
Density Resolution	0.001g/cm ³
Density Range	0.001~99.999g/cm ³
Measuring Time	About 5s
Measuring Principle	Archimedes principle displacement method
Weight Value Data Storage	1 group
Specific Gravity Measuring Frame	304 stainless steel specific gravity measuring frame
Calibration Mode	Auto correction, auto detection.
Result Testing Method	Distilled water testing
Standard Accessories	Measuring plate, tweezer, thermometer, 100G weight, windshield, measuring frame, power transformer, DE-20A standard liquid measuring assembly (Components of DE-20A standard liquid measuring assembly: Two stainless steel pothooks, one normal glass weight, one normal stainless steel weight, two beakers)
Optional Accessories	DE-40 printer, DE-20B anti corrosive liquid measuring assembly, DE-20A standard liquid measuring set
Power Supply	AC 100~240V, 50/60Hz
External Size(W*D*H)	195*230*185mm
Package Size(W*D*H)	440*180*345mm
Net Weight	1.47kg
Gross Weight	4.5kg

Solid and Liquid Densimeter



Application:
It is suitable for the field of quality management, cost control, new formula researching and material studying, etc. Any form of solid could be measured. Measurement of special liquid such as volatile liquid, corrosivity liquid, strong acid and strong alkali liquid need optional accessory DE-20B anti corrosive liquid measuring assembly.

- Features:**
- * Automatic zero tracking, buzzer warning, and overload warning.
 - * Actual water temperature compensation.
 - * Function of solution compensation: necessary if liquid other than water is used as a medium for measuring.
 - * RS-232C included.

Technical Parameters:

Model		BK-DME300D	BK-DME600D
Capacity		0.005~300g	0.005~600g
Density Resolution		0.001g/cm³	
Density Range		0.001~99.999g/cm³	
Measuring Time		About 5s	
Solid Mode	Measuring Principle	Archimedes principle general solid test method	
	Specific Gravity Measuring Frame	Unibody injection forming professional specific gravity measurement frame	
	Measuring Tank	Unibody injection forming transparent professional measuring tank Size: 153*107*93mm (L*W*H)	
	Mixed Material Percentage	Function introduction	Automatically read the percentage of the main material in composite which consist of two materials
		Setting	Freely set the density value of main material and subordinate material
		Display	Density value, percentage of main material
Liquid Mode	Measuring Principle	Archimedes principle displacement method	
	Weight Value Data Storage	1 group	
	Specific Gravity Measuring Frame	Stainless steel specific gravity measuring frame	
	Memory Mode	Dynamic memory	
	Result Display	Density value	
Result Testing Method		Distilled water testing	
Calibration Mode		Auto correction, auto detection.	
Standard Accessories		Common Use: Tweezer, thermometer, 100G weight, windshield, power transformer. Solid Use: Tank, testing board, a set of particle measuring assembly, a set of floating body measuring assembly. Liquid Use: Measuring plate, measuring frame, DE-20A standard liquid measuring assembly	
Optional Accessories		DE-40 printer, DE-20B anti corrosive liquid measuring assembly	
Power Supply		AC 100~240V, 50/60Hz	
External Size(W*D*H)		195*230*197mm	
Package Size(W*D*H)		440*180*345mm	
Net Weight		1.78kg	1.79kg
Gross Weight		4.5kg	

Precious Metal Tester



Application:
Distinguish K value of gold, PT value of platinum, density value, purity percentage can be measured. Pawning house, bank, jewelry shop, precious-metals recovery, jewelry factory, Gemstone Testing Center, precious metals researching, etc.
Note: Unable to measure sample which is hollow or with inserted gems.

- Features:**
- * Multi-mode, gold mode, platinum mode, other precious metals mode can be switched.
 - * Top and bottom limitation of K value, purity and density of gold. And prompt alarm.
 - * Automatic zero tracking, buzzer warning, and overload warning.
 - * No damage testing, cleaning and environmental protection.
 - * Could be used as precision balance.
 - * Function of solution compensation: necessary if liquid other than water is used as a medium for measuring.
 - * RS-232C is included.

Technical Parameters:

Model		BK-DMG300K	BK-DMG600K	BK-DMG900K	BK-DMG1200K	BK-DMG2000K
Capacity		0.005~300g	0.005~600g	0.01~900g	0.01~1200g	0.01~2000g
Density Resolution		0.001g/cm³				
Measuring Time		5~20s				
Measuring Principle		Archimedes principle				
Testing Board		Unibody high-capacity plastic testing board				
Gold Mode	Display K Value	The K value of mixture of gold, silver, and copper; mixture of gold and copper; mixture of gold and silver				
	Display Purity Percentage	The purity content of mixture of gold, silver and copper; mixture of gold and copper; mixture of gold and silver				
	K Value Range	9K~24K				
	Copper and Silver Proportion Setting	Cycle setting depends on user's preference (default 7:3)				
Platinum	Display Value	PT percentage, density value, volume				
	PT Value Range	PT600~PT1000				
Silver	Display Value	S value, % content, density value				
	PT Value Range	S600~S1000				
Measuring Tank		Unibody injection forming transparent professional measurement tank Size: 153*107*93mm (L*W*H)				
Calibration Mode		Auto correction, auto detection.				
Standard Accessories		Tank, testing board, tweezer, thermometer, weight, windshield, power transformer, a set of gold particle measuring assembly				
Option Accessories		DE-40 printer				
Power Supply		AC 100~240V, 50/60Hz				
External Size(W*D*H)		195*230*197mm				
Package Size(W*D*H)		440*180*345mm				
Net Weight		1.78kg	1.79kg	1.8kg	1.8kg	1.82kg
Gross Weight		4.5kg	4.5kg	4.9kg	4.8kg	5.3kg

High-precision Solid and Liquid Densimeter



Application:

It is suitable for the field of quality management, cost control, new materials researching, scientific academies, researching key laboratories, quality inspection, etc.

Any form of solid could be measured, including objects of hygroscopicity, non-absorbency, high-viscosity.

Measurement of special liquid such as volatile liquid, corrosivity liquid, strong acid and strong alkali liquid need optional accessory DE-20B anti corrosive liquid measuring assembly.

Features:

- * Automatically check whether density is qualified or not and prompt alarm.
- * Automatic zero tracking, buzzer warning, and overload warning.
- * Function of solution compensation: necessary if liquid other than water is used as a medium for measuring.
- * RS-232C is included.

Accessories for Densimeter

Standard Accessory:



DE-20A standard liquid measuring assembly

Optional Accessories:



DE-20B anti corrosive liquid measuring assembly



DE-40 printer

Technical Parameters:

Model	BK-DMH120D	BK-DMH300D
Capacity	0.001~120g	0.005~300g
Density Resolution	0.0001g/cm ³	0.001g/cm ³
Density Range	0.0001~99.9999g/cm ³	0.001~99.999g/cm ³
Measuring Time	About 5s	
Solid Mode	Measuring Principle	Archimedes principle
	Measurable Items	Density of general non-absorbency solid. Density of porosity materials. Oil length of oil bearing. Porosity of porosity materials. DIN volume abrasion loss of rubber. Powder density. Water absorption rate.
	Specific Gravity	Unibody injection forming professional specific gravity measurement frame Size: 135*50*116mm (L*W*H)
	Measuring Frame Measuring Tank	Unibody injection forming transparent professional measuring tank Size: 169*98*83mm (L*W*H)
	Mixed Material Percentage	Function introduction Automatically read the percentage of the main material in composite which consist of two materials
		Setting Freely set the density value of main material and subordinate material
		Display Density value, percentage of main material
Liquid Mode	Measuring Principle	Archimedes principle displacement method
	Weight Value Data Storage	3 groups
	Specific Gravity Measuring Frame	Stainless steel specific gravity measuring frame
	Result Display	Density and Baume value
	Result Testing Method	Distilled water testing
Calibration Mode		Auto correction, auto detection.
Standard Accessories		Common Use: Tweezer, thermometer, 100G weight, windshield, power transformer. Solid Use: Tank, testing board, a set of particle measuring assembly, a set of floating body measuring assembly. Liquid Use: Measuring plate, measuring frame, DE-20A standard liquid measuring assembly
Optional Accessories		DE-40 printer, DE-20B anti corrosive liquid measuring assembly
Power Supply		AC 100~240V, 50/60Hz
External Size(W*D*H)		195*230*197mm
Package Size(W*D*H)		440*180*345mm
Net Weight	1.59kg	1.78kg
Gross Weight	4.5kg	

Electrophoresis System

Electrophoresis Power Supply



Application:

Suitable for common protein and nucleic acid electrophoresis, suitable for multiple tanks in one machine.

Features:

- * Display: Seven-inch large touch screen, convenient touch operation, automatic generation of digital keyboard when setting, display the clock timing temperature running status and various prompt operations.
- * Storage step by step: 10 programs can be edited and saved, and each program can be run in 10 steps.
- * Protection function: over current, overload, over temperature, no load, short circuit load mutation protection function.
- * Micro current: After the timing operation is over, the micro current output can be maintained when no one is shutting down.
- * Automatic setting: When one of the indicators of constant voltage, current and power, the other two items will automatically rise to the maximum value without manual adjustment.
- * Appearance: The appearance is tall and full of technology.

Technical Parameters:

Model	BEP-600D
Output	Constant-voltage or current or power(adjustable)
Output Range	5-600V; 1-1200mA; 5-300W
Increment	1V, 1mA, 1W
Timing	1min~99h59min
Parallel Output	4 groups
Temperature Check	-20℃~+85℃
Power Supply	AC220V±10%, 50/60Hz(standard); 110V±10%, 60Hz(optional)
External Size(L*W*H)	300*300*130mm
Package Size(L*W*H)	450*410*260mm
Gross Weight	3.6kg

Application:

The electrophoresis Power supply is a dedicated power supply device for electrophoresis. Be extremely careful when used in other occasions. In addition, the power supply of the electrophoresis instrument cannot be used in series or parallel with other charged equipment.

Features:

- * Large-screen LCD displays voltage, current, power and timing time at the same time.
- * Voltage, current and power closed-loop control, realizing adjustment during operation.
- * With call recovery function. * After reaching the set time, it has the function of maintaining small current.
- * Perfect protection and early warning functions. * With memory storage function.
- * One machine with multiple slots, four parallel outputs.

Technical Parameters:

Model	BEP-300I	BEP-600I
Voltage Output Range	2-300V(Resolution:1V)	5-600V(Resolution:1V)
Current Output Range	5-2000mA(Resolution:1mA)	4-600mA(Resolution:1mA)
Power Output Range	1-300W(Resolution:1W)	
Input Voltage	220V, 50/60Hz	
Parallel Output	4 groups	
Timing Function	1min-99h59min, adjustable	
External Size(L*W*H)	250*350*105mm	
Package Size(L*W*H)	440*330*210mm	
Net Weight	3.5kg	
Gross Weight	6kg	



Application:

Electrophoresis Power Supply is a special power supply equipment of electrophoresis, generally used for the separation, identification, purification and production of proteins, amino acids, nucleic acids, enzymes, peptides, hormones, pyrimidine, organics and inorganic. It can be used for multiple electrophoresis including DNA sequence analysis, isoelectric focusing electrophoresis(IEF).

Features:

- * Micoprocessor control, large-screen LCD display.
- * High-performance switching power supply as the output core, high-power, strong load, high control accuracy, stable and reliable. * Voltage, current and power closed-loop control. Realizing adjustment during operation.
- * Protection function: overload, variable load, short circuit, open loop, overrun and other protection functions.
- * With 4 modes and memory storage function, 9 programs can be edited and saved. * With 2 parallel outputs.

Technical Parameters:


Model	BEP-3000I
Voltage Output Range	10-3000V(Resolution: 1V)
Current Output Range	3mA-300mA(Resolution: 1mA)
Power Output Range	5-200W(Resolution: 1W)
Input Voltage	220±10%V, 50/60 ±1 Hz, 400VA
Parallel Output	2 groups
Timing Function	1min~99h 59min, adjustable
External Size(L*W*H)	310*370*175mm
Package Size(L*W*H)	400*470*250mm
Net Weight	7.5kg
Gross Weight	9kg



Horizontal Electrophoresis Tank

Application:

Horizontal electrophoresis is a basic means in molecular biology research. It is widely used for DNA detection and separation, and molecular testing in the nucleic acid analysis, purification and preparation experiment.

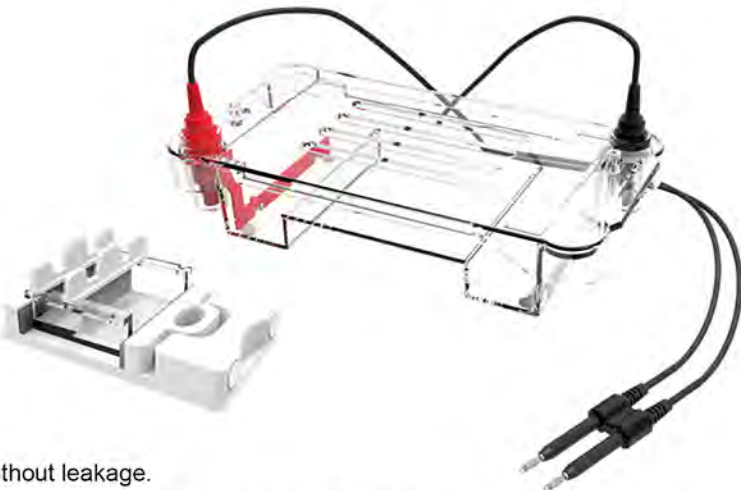


Features:

- * Polycarbonate is injection molded at one time without leakage.
- * The cooling hole design on the upper cover effectively avoids the condensation of water vapor.
- * Special telescopic elastic glue maker to ensure clean and no leakage of glue.
- * The limit function prevents the positive and negative electrodes from being reversed.
- * Highly flexible wire, power-off design when opening the cover to ensure safety.
- * The electrode head can be replaced for easy maintenance.
- * 99.99% high-purity platinum electrode, the best electrical conductivity, corrosion and aging resistance.
- * Recommended power supply: BEP-300I, BEP-600I, BEP-600D.

Technical Parameters:

Model	BK-HET01
Gel Trays(W*L)	75*60mm
Buffer Volume	300ml
Comb Thickness	1&1.5mm
Comb Throughput	6, 11 samples
NO. Of Samples	6~22
Standard Accessories	Body tank with electrode*1, Cap*1, Gel tray*1, Gel box*1, 1.0mm thickness 6/11 wells comb*2, 1.5mm thickness 6/11 wells comb*2
External Size(L*W*H)	180*90*70mm
Package Size(L*W*H)	300*240*150mm
Gross Weight	1.15kg

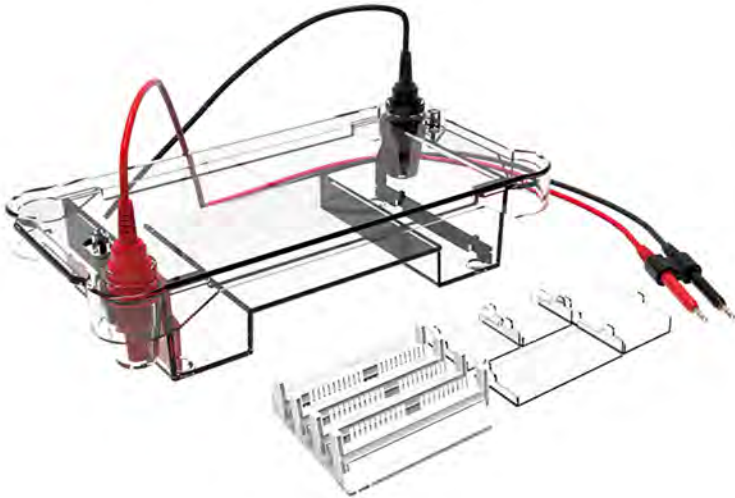

Application:

Horizontal electrophoresis is a basic means in molecular biology research. It is widely used for DNA detection and separation, and molecular testing in the nucleic acid analysis, purification and preparation experiment.

Features:

- * Polycarbonate is injection molded at one time without leakage.
- * Can make 4 kinds of different sizes of gel, two types of glue maker are optional.
- * The limit function prevents the positive and negative electrodes from being reversed.
- * Optional electrophoresis monitor can monitor the electrophoresis band in real time during the electrophoresis process.
- * The electrode head can be replaced for easy maintenance.
- * 99.99% high-purity platinum electrode, the best electrical conductivity, corrosion and aging resistance.
- * Recommended power supply: BEP-300I, BEP-600I, BEP-600D.


Technical Parameters:

Model	BK-HET02
Gel Trays(W*L)	120mm*120mm, 120mm*60mm, 60mm*120mm, 60mm*60mm
Buffer Volume	700ml
Comb Thickness	1&1.5mm
Comb Throughput	2, 3, 6, 8, 11, 13, 18, 25 samples
NO. Of Samples	2~50
Standard Accessories	Body tank with electrode*1, Cap*1, Gel tray*5, Gel box*1, 2/3 wells comb*1, 6/13 wells comb*1, 8/18 wells comb*1, 11/25 wells comb*4
External Size(L*W*H)	270*140*80mm
Package Size(L*W*H)	400*360*270mm
Gross Weight	2kg

Vertical Electrophoresis Tank

Application:

Vertical electrophoresis is used for separation, purification and preparation of nucleic acid and protein samples in life science research.

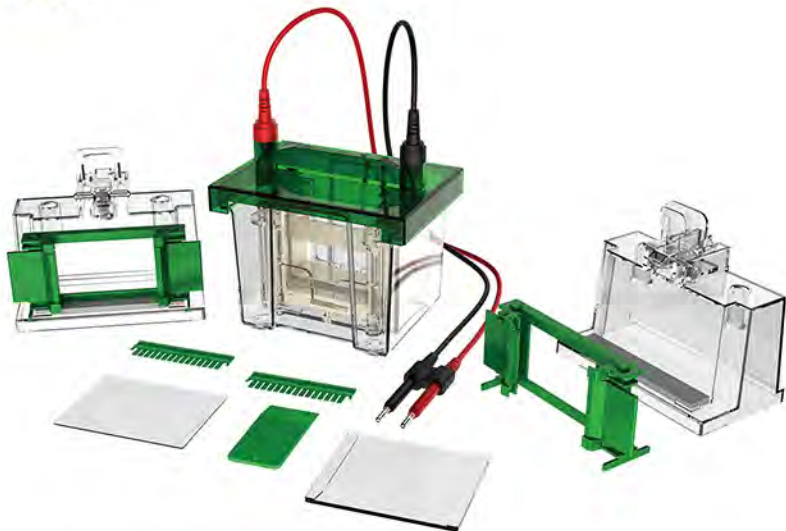

Features:

- * High-transparency polycarbonate injection molding, durable and easy to observe.
- * The integrated design of the glass cushion strip ensures that there is no leakage of glue.
- * The special glue making rack makes the glue making operation simple and reliable.
- * Open the cover and cut off the power to ensure the safety of the experiment.
- * The upper cover limit function ensures that the polarity of the electrode will not be connected incorrectly.
- * The power-off function of opening the lid ensures the safety of the experiment.
- * It can make double-board glue at the same time, with clear strips.
- * 99.99% high-purity platinum electrode, the best conductivity, strong corrosion resistance.
- * Recommended power supply: BEP-300I, BEP-600I, BEP-600D.

Technical Parameters:

Model	BK-VET01
Glass Tray (W*L)	Thick type: 101*83mm, thin type: 101*73mm
Gel Trays(W*L)	Hand glue: 83*73mm, precast glue: 86*68mm
Comb Thickness	Standard 1.0mm, optional 1.5mm
Comb Throughput	10, 15 samples
Amount of Gel	1~2 pcs
NO. of Samples	10~30pcs
Buffer Volume	700ml
Standard Accessories	Body tank *1, Cap*1, Electrode core*1 set, Gel casting base*2, Gel frame*2, Single glue baffle*1, Gel shovel*1, Glass plates*5 pairs, 1.0mm thickness10 wells comb*2, 1.0mm thickness 15 wells comb*2
External Size (L*W*H)	150*120*130mm
Package Size(L*W*H)	400*350*300mm
Gross Weight	2.7kg



Application:

Vertical electrophoresis is used for separation, purification and preparation of nucleic acid and protein samples in life science research.


Features:

- * High-transparency polycarbonate injection molding, durable and easy to observe.
- * The integrated design of the glass cushion strip ensures that there is no leakage of glue.
- * The special glue making rack makes the glue making operation simple and reliable.
- * Open the cover and cut off the power to ensure the safety of the experiment.
- * The upper cover limit function ensures that the polarity of the electrode will not be connected incorrectly.
- * The power-off function of opening the lid ensures the safety of the experiment.
- * It can make double-board glue at the same time, with clear strips.
- * 99.99% high-purity platinum electrode, the best conductivity, strong corrosion resistance.
- * Recommended power supply: BEP-300I, BEP-600I, BEP-600D

Technical Parameters:

Model	BK-VET02
Glass Tray (W*L)	Thick type: 101*83mm, thin type: 101*73mm
Gel Trays(W*L)	Hand glue: 83*73mm, precast glue: 86*68mm
Comb Thickness	Standard 1.0mm, optional 1.5mm
Comb Throughput	10 samples
Amount of Gel	1~4 pcs
NO. of Samples	10~40pcs
Buffer Volume	1000ml
Standard Accessories	Body tank *1, Cap*1, Electrode core*1 set, Gel casting base*2, Gel frame*4, Single glue baffle*1, Gel shovel*1, Glass plates*5 pairs, 1.0mm thickness10 wells comb*5
External Size (L*W*H)	180*130*130mm
Package Size(L*W*H)	400*350*300mm
Gross Weight	3.9kg

Western Blot Electrophoresis Tank

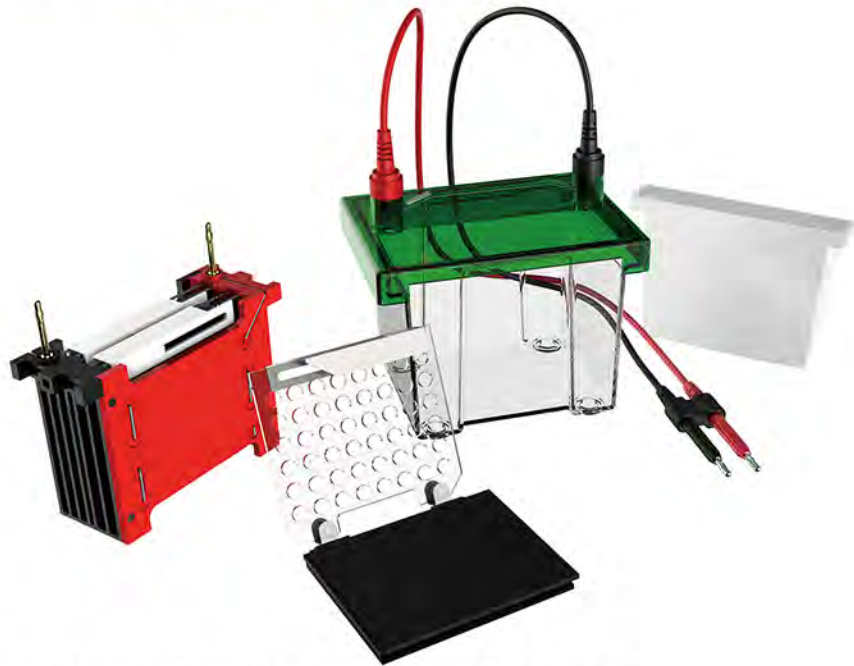

Application:

This product is a fast and high-quality transfer operation for small protein gels.

Features:

- * The positive electrodes are gathered together 4cm to generate a strong electric field for effective protein transfer.
The built-in ice box or blue crystal ice box is optional to quickly absorb the heat generated during the electrophoresis process.
- * Use with BK-VET01, BK-VET02.
- * Highly flexible wire, power-off design when opening the cover to ensure safety.
- * The electrode head can be replaced for easy maintenance.
- * 99.99% high-purity platinum electrode, the best electrical conductivity, corrosion and aging resistance.
- * Recommended power supply: BEP-300I, BEP-600I, BEP-600D.

Technical Parameters:

Model	BK-TET01
Transfer Gel Area (W*L)	110*90mm
Buffer Volume	700ml
Standard Accessories	Body tank *1, Cap*1, Transfer core*1 set, Transfer clip*2, Sponge cushion*4, Ice box*1
External Size (L*W*H)	150*120*130mm
Package Size(L*W*H)	290*290*200mm
Gross Weight	1.3kg

UV Transilluminator



Function Overview:

The function of the ultraviolet analyzer is to be used for fluorescence analysis: when a material molecule in the ground state is exposed to excitation (ultraviolet light), it absorbs the excited energy and the material molecule is in the excited state.

Features:

- * Equipped with a fixed camera port rack, the instrument is suitable for most SLR cameras on the market.
- * With anti-ultraviolet observation window filter 99% ultraviolet, real-time observation of the sample situation, more intuitive, more safe.
- * Nano medical ultraviolet lamp, the ultraviolet intensity of 20μW/cm away from the sample, in line with the measurement standard.

Technical Parameters:

Model	BK-UA2
UV Lamp	6W*10pcs
Reflection Wavelength	254nm, 365nm
Transmission Wavelength	302nm
Visible Light	60W
Reflective Filter Size	200*80mm
Transmission Filter Size	200*150mm
UV Intensity	Ultraviolet intensity of 20cm away from the sample reaches 20μW/cm²
Power Supply	220V, 50Hz
Packing Size	480*395*535mm
Gross Weight	7kg

Automatic Gel Imaging and Analysis System

Introduction:

Automatic Gel Imaging and Analysis System is a highly integrated and fully automated gel imaging system, system interface is simple and practical, the main interface has shooting button and time control to guide the user, it is ver y easy to operate, no need to have manual and tedious debug, it is your best choice.



Features:

High-resolution CMOS camera, high sensitivity, high resolution, with automatic focus and high performance 6 times len, specialized filter for nucleic acid dye.



CMOS Camera



Autofocus Lens



Multilayer Coating Filter


Specialized overlay glue cutting filter, compared with the traditional one, it has many advantages, easy to operate, can prevent UV and blue light damage, no need to operate in dark room, work ver y well under strong light condition The white light sample plate is used for SDS -PAGE glue samples shooting.



UV sample plate




Glue Cutting Filter




White Sample Plate

Application:

It can be used to do nucleic acid test for various fluoresent dyes, such as EB, SYBRGold, SYBR Green, SYBR Safe, Gel Red Gel GreenTexas, Red, Fluorescein marked DNA/RNA.



DNA Gel Imaging



SDS-PAGE Imaging



Thin-layer Chromatography




Colony Counting

Technical Parameters:

Mode	BK-AG100
Pixel	2592*1944(5.03MP)
Exposure Time	1ms-3000ms
QE Value	High QE: >65%
Binning	1*1
Bit Depth	16 bit (0 - 65535)
OD	≥4.8 OD
Lens	Motorized 8-48 mm, F1.2
Trans-UV	302nm
Epi-White	LED
Trans-White	UV to white sample plate
Epi-UV	254nm、 302nm、 365nm
Filters	590nm, Others for option
UV Area	21*21cm
Timing Off	1~60 mins
Power Supply	100-240V, 50/60Hz
Packing Size	460*475*725mm
Gross Weight	31kg

Automatic Chemiluminescence Imaging System

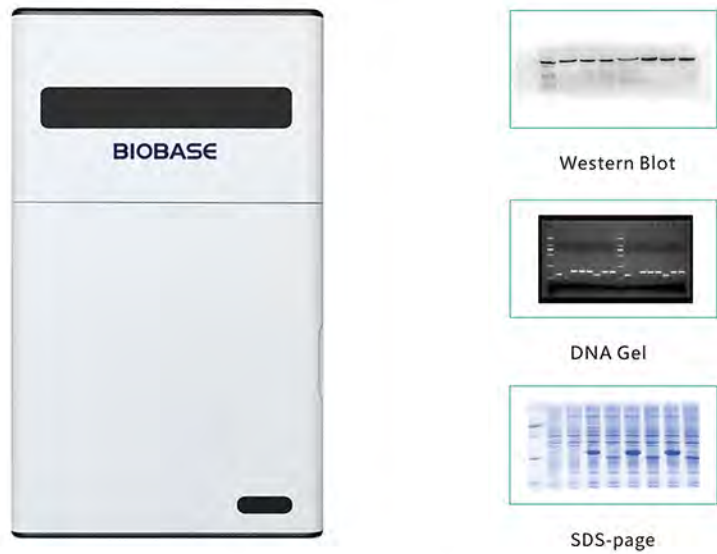

Applications:

Nucleic acid detection: EB, SYBRGold, SYBRGreen, SYBRSafe, GelRed, GelGreen, Fluorescein.
 Protein test: Silver dyeing, SDS-page, Visible light imaging.
 Luminescence detection: Western Blot, Western Lightning, ECL, ECLplus


Features:

- * Fully automatic control of the lens and light source
- * Precise automatic exposure in calculate, no need to repeat calculation the exposure time
- * One button shooting, marker and chemiluminescence image automatic stacking
- * Cryogenic scientific research ultrasensitive CCD camera, wide aperture Lens

Technical Parameters:

Model	BK-ACG600	BK-ACG900
Camera Resolution	9.0MP	12.0MP
Cooling Temperature	-65℃	
Photosensitive Efficiency	95%	95%
Pixel Size	3.75*3.75μm	4.63*4.63μm
Exposure Time	1ms~60min	
Pixel Density	16 Bits (0-65535)	
OD	≥4.8OD	
Lens	Standard: F=0.95, 25mm; optional: F=0.8, 25mm	
UV Transmission	302nm	
White Light Reflection	LED reflection (cold light)	
Filter	Standard 590nm, other optional	
Shooting Area	32*26cm	
Timer Shut Down	1~60min	
Power Supply	100~240V, 50/60Hz	
Packing Size	490*515*845mm	
Gross Weight	40kg	

Integrated Automatic Gel Imaging System

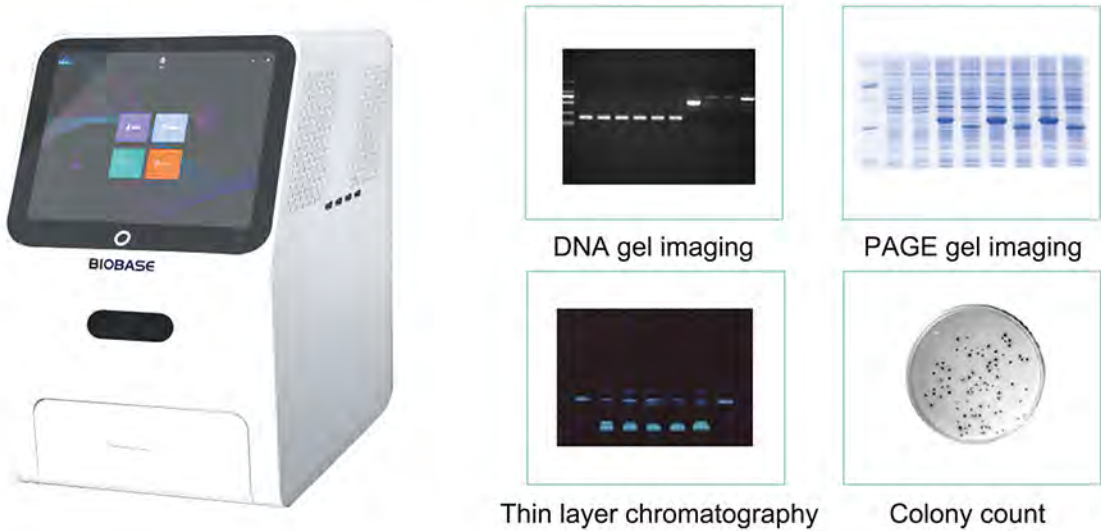

Applications:

Nucleic acid detection with various fluorescent dyes such as EB, SYBR Gold, SYBR Green, SYBR Safe, Gel red Gel, Green Texas Red, Fluorescein labeled DNA/RNA, etc.

Features:

- * Camera lens, adopt dark field camera module. Super aperture 20 million Solutions Analyticity.
- * Touch system 12.5 inches touch HD display, one touch imaging, intelligent processing system.
- * Special filter, multilayer coated filter is adopted passing of absolute stray light.
- * Standard of USB port

Technical Parameters:

Model	BK-AGX3
Camera Resolution	6.0MP
Photosensitive Efficiency	≥79%
Exposure Time	1ms-5000ms
Pixel Density	16 Bits (0-65535)
OD	≥4.8OD
Lens	Large aperture autofocus lens, 20 million auto focus lens
UV Transmission	302nm, optional other transmitted blue light
White Light Reflection	LED reflection (cold light)
White Light Transmission	White light emitting panel
Filter	Standard 590nm, other optional
Shooting Area	21×21cm
Timer Shut Down	1-60min
Touch System	12.5-inch touch system
Power Supply	110-240V, 50/60Hz
Packing Size	450*462*666mm
Gross Weight	22.3kg


Eye Washer
 Deck Mounted Eye Washer



EW-DM1



EW-DM2

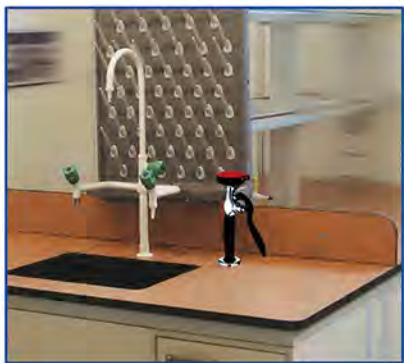

- * Max. working pressure: 7 bar.
- * Valve: None-return valve, shut off automatically.
- * Hose: Length 1.4m, PVC with stainless steel net.
- * Sprayer head: Soft rubber, softened water spray for eye protection.
- * Dust shield cap: PP, removed automatically when eye washer is operated.
- * Switch: Automatic trigger locking for easy hand-free use.
- * Material: Solid thick brass with high gloss epoxy powder, resistant to chemicals, UV and heat.

Technical Parameters:

Model	EW-DM1	EW-DM2
Package Size(W*D*H)	270*170*80mm	370*170*80mm
Gross Weight	1kg	1.5kg

Wall Mounted Eye Washer

- * Material: stainless steel 304
- * Surface finishing: fine-polished
- * Function: wash eyes and face
- * Eye wash switch: two-piece ball valve
- * Nominal pressure: 1.0 Mpa; working pressure: 0.2~0.4 Mpa; testing pressure: 1.5 Mpa
- * Flow rate of eye/face wash: ≥ 11.4 L/min
- * Inlet thread: Rp 1-1/4",female / Rp 1/2",female
- * Outlet thread: Rp 1-1/4",female / Rp 1", female
- * Package Size(W*D*H): 470*420*350mm
- * Gross Weight: 8.5kg



EW-WM1

Wall Mounted Shower Eye Washer



S-WM2



S-CM3



SEW-WM1

- * Material: Stainless steel 304 /ABS
- * Surface finishing: fine-polished
- * Function: eye and face washing & showering
- * Shower & eye wash switch: two-piece ball valve
- * Pipe diameter: 38/48 mm
- * Inlet thread: Rp 1"1-¼" , female
- * Flow rate of body shower: ≥76 L/min
- * Flow rate of eye/face wash: ≥11.4 L/min

Technical Parameters:

Model	S-WM2	S-CM3	SEW-WM1
Package Size(W*D*H)	820*270*160mm	960*340*140mm	1315*355*250mm
Gross Weight	5.5kg	5kg	18kg

Combination Emergency Shower Eye Washer



Features:

- * Material: Stainless steel 304, fine polish/high brightness antioxidant coating.
- * Assembling feature: the "Union" allows easier pipe connection and disconnection.
- * Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously, shower & eye wash switch: two-piece ball valve.
- * Shower head: spinning-formed with curled rim, diameter 250 mm, pipe diameter: 38 mm.
- * Nominal pressure: 1.0 Mpa, working pressure: 0.2~0.4 Mpa, testing pressure: 1.5 Mpa.
- * Flow rate of body shower: ≥76 L/min, flow rate of eye/face wash: ≥11.4 L/min, flow rate of eye wash: ≥1.5 L/min.
- * Eyewash bowl features: 300 mm in diameter.
- * Inlet height(From above the floor): 1186 mm, outlet height(From above the floor): 86 mm, distance between spray heads: 170 mm, water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter.

Technical Parameters:

Model	SEW-C1	SEW-C2
Package Size(W*D*H)	1310*380*250mm	1310*350*440mm
Gross Weight	17.5kg	20kg

Fiber Analyzer



Features:

- * 16-bit true-color 7-inch touchscreen; intuitive UI enabling one-hand operation.
- * On-board storage for 50 user-defined protocols.
- * 5 independent user accounts, supporting password or fingerprint login.
- * Role-based access control, each account can be assigned a customized function set.
- * Built-in self-diagnostics for all moving parts; on-screen status display for quick maintenance.
- * Special-alloy reactor: resistant to high temperature, high pressure and corrosion; service life over 10,000 cycles.
- * Dual dry-run protection (hardware + software).
- * Automatic air-tightness check before and during operation; alarm for lid leakage.
- * Anti-foam chamber design, no defoamer required, odor-free.
- * High-power aluminum heating block for rapid, uniform heating.
- * Closed digestion: steam containment, enabling micro-boiling without cooling water.
- * ±0.2 °C PID control via in-vessel PT1000 sensor.
- * Real-time pressure monitoring; automatic pause and pop-up alarm when limits are exceeded.
- * Audible and visual prompts upon test completion.
- * Three built-in fiber calculation formulas; automatic result printing after sample mass input.

Technical Parameters:

Model	BK-F1600		
Processing Temperature Range	Room temperature ~100℃	Sample Batch Capacity	1~24
Sampling Amount/Bag	0.5~1.5g	Adding Method	Manual
Fiber Test Range	0.1~100%	Temperature Control Accuracy	±0.2℃
The Cooking Time Setting of Each Stage	0~999min		
Repeatability Accuracy	If the fiber content is less than 10%, the relative deviation is ≤5%; If the fiber content is greater than 10%, the relative deviation is ≤3%		
Daily Processing Capacity	24~96 pieces of crude fiber, 24~120 pieces of neutral detergent fiber/acid detergent fiber/lignin(8-hour working system)		
External Size(W*D*H)	560*430*510mm		
Net Weight	28kg		
Package Size(W*D*H)	660*500*590mm		
Gross Weight	44kg		

Automatic Fiber Analyzer



Features:

- * Full compliance with international standards, full-automatic operation, solves traditional drawbacks, and ensures accurate CF/ADF/NDF testing.
- * Advanced filter bag technology for stable, reliable CF/NDF/ADF analysis results.
- * 16-bit true-color touch screen: intuitive, easy to operate.
- * 50 configurable experimental programs to meet diverse testing needs.
- * 5 user accounts with hierarchical permissions for standardized management.
- * Fingerprint login: no account/password, faster operation.
- * Built-in component detection: easy maintenance, longer equipment life.
- * Special material reaction kettle: high temperature/pressure/corrosion resistance, safe and stable operation.
- * Anti-foam design: no defoamer, eco-friendly, cost-saving.
- * Automatic reagent filling (5 types): high-speed, quiet, self-cleaning pipelines, no cross-contamination.
- * High-power heating: ≤5min to set temperature, high efficiency.
- * Closed digestion: no cooling water, precise temperature control, accurate results.
- * Intelligent alarms: auto-pause on abnormalities, protects equipment.
- * Experiment completion prompts: built-in formulas + printer, no manual calculation.

Technical Parameters:

Model	BK-F5800		
Processing Temperature Range	Room temperature ~100℃	Sample Batch Capacity	1~24
Sampling Amount/Bag	0.5~1.5g	Adding Method	Automatic
Fiber Test Range	0.1~100%	Temperature Control Accuracy	±0.2℃
The Cooking Time Setting of Each Stage	0~999min		
Repeatability Accuracy	If the fiber content is less than 10%, the relative deviation is ≤5%; If the fiber content is greater than 10%, the relative deviation is ≤3%		
Daily Processing Capacity	24~96 pieces of crude fiber, 24~120 pieces of neutral detergent fiber/acid detergent fiber/lignin(8-hour working system)		
Power Supply	AC220V, 50Hz		
Standard Accessories	Special 3D Filter Bags*200; Inert Black Marking Pens*1; Sealer*1; Filter Bag Fixing Bracket*1; Filter Bag Placement Rack*1; Cover*1		
External Size(W*D*H)	580*410*495mm		
Net Weight	38kg		
Package Size(W*D*H)	680*520*710mm		
Gross Weight	56kg		

Fat Analyzer

Features:

- * 3μm 3D ultra-micro filter bags; auto-processes up to 22 samples at once.
- * Full auto operation with buzzer alert, intelligent, safe and labor-saving.
- * 16-bit true-color touch screen, intuitive and easy to operate.
- * 5 independent user accounts with precise hierarchical permissions.
- * Fast fingerprint login (no account/password) for high efficiency.
- * Stores ≥10 experimental programs; one-key add/delete/edit/query, simplifying processes for diverse samples.
- * Fully closed circulation system with card-fixed cups for unsupervised operation.
- * Auto solvent recirculation (≥96% recovery, no leakage), eco-friendly and cost-saving.
- * Activated carbon tail gas adsorption; no harmful gas contact, no extra fume hood, ensuring operator safety.
- * High-precision temperature control maintains stable reagent micro-boiling for accurate results. Closed digestion, no steam overflow.
- * Built-in stainless steel cooler (excellent cooling, water-saving, cost-reducing); real-time monitoring of cooling water temp and condensate flow to avoid abnormalities.
- * Intelligent condensation circulation (auto start-stop at 90℃, ±0.1℃ precision, 105℃ over-temperature protection).
- * High-power aluminum heater, ≤5min temp rise, efficient.
- * Multiple intelligent alarms: auto-alert, shutdown and pop-up for insufficient reagent or abnormal reactor pressure/temp, preventing damage and errors.
- * Built-in component detection for easy maintenance and long service life. Special material reactor (high temp/pressure/corrosion resistant) with double anti-dry heating protection.
- * Reactor with airtightness self-inspection and locking device; prevents loosening/accidental opening, eliminating scald and pollution risks.
- * Double prompts (buzzer + screen) and auto reactor cooling after experiment completion, avoiding sampling scald.



Technical Parameters:

Model	SFA-15
Technology	3μm 3D ultra-micro filter bags
Temp. Control Range	RT~100℃; Extraction Temp.: 50~90℃
Temp. Accuracy	±0.2℃
Sample Batch Capacity	22
Daily Processing Capacity	176 samples (8-hour working time)
Sampling Amount/Bag	0.5~1.5g
Solvent Recovery	≥97%
Measuring Range	0.1~100%
Batch Processing Time	30~90 minutes (including heating and drying time)
Result Standard Deviation	≤±0.5%
Repeatability Accuracy	≤±0.5%
Reagents	Petroleum Ether, Ether.
Power Supply	AC220V, 50Hz
Standard Accessories	Extraction Cup*1; Special 3D Filter Bags*200; Basket*1; Inert Black Marking Pens* 1; Sealer*1; 16-Position Sample Holder*1; Waste Liquid Bottle*1
External Size(W*D*H)	318*470*718mm
Net Weight	40kg
Package Size(W*D*H)	575*520*915mm
Gross Weight	55.4kg

Fat Extractor



Introduction:
 Fat Extractor(also known as automatic Soxhlet extractor, crude fat analyzer), mainly by heating extraction, solvent recovery, cooling three parts. Each heating tank can adjust the heating temperature and time independently according to the different boiling point of the reagent, and the sample is repeatedly soaked and extracted by the reagent to achieve the purpose of rapid extraction.

Application:
 Mainly used for extracting food, grain, feed, oil, soil, wool grease and other samples.

- Features:**
- * 7 inch LCD touch screen display control.
 - * Integrated metal bath heating system ensures that each sample can be operated independently.
 - * Cast aluminum heating module, fast heating speed, fast reflux speed.
 - * With heating extraction, solvent recovery function, saving experimental supplies.
 - * Built-in circulating water pipeline, easy to operate.
 - * With overvoltage, overheating, leakage multiple protection devices.
 - * Reserve heating function, reserve opening time.

Technical Parameters:

Model	BKXET02C	BKXET04C	BKXET06C
Capacity	2pcs	4pcs	6pcs
Sample Weight	0~100g		
Temp. Range	RT.~250℃		
Solvent Cup Volume	250ml		
Power Supply	AC 220V, 50/60Hz(Standard); 110V, 50/60Hz(Optional)		
Heating Way	Dry independent heating		
Device	Condensing recovery device, overheating protection device		
External Size(W*D*H)	330*410*850mm	532*410*850mm	750*410*850mm
Package Size(W*D*H)	435*515*995mm	640*515*995mm	855*515*995mm
Net Weight	18kg	23kg	31kg
Gross Weight	23kg	28kg	37.5kg

Fat Analyzer



Applications:
 The water bath fat analyzer is a commonly used instrument for food, oil, feed and other industries to measure fat content by gravimetric method based on Soxhlet extraction principle. This instrument is mainly composed of three parts: heating and soaking extraction, solvent recovery and cooling. It dissolves fat in organic solvent, separates fat from solvent by extraction method, and then calculates the fat content after drying and weighing. During operation, the heating temperature can be adjusted according to the boiling point of the reagent and the ambient temperature. The sample is soaked and extracted repeatedly during the extraction process, so as to achieve the purpose of rapid determination.

- Features:**
- * Digital temperature control, timing, and alarm when the time comes
 - * The heating power can be adjusted arbitrarily, and the heating temperature can be adjusted according to the boiling point of the reagent and the ambient temperature
 - * Adopt ground glass junction and PTFE sealed switch, high reagent recovery rate
 - * Stainless steel water bath Teflon coating treatment, anti-corrosion, anti-rust, durable and beautiful
 - * Small size, fast heating speed in water bath, good heating uniformity
 - * Self-flowing liquid addition, reagent extraction is smooth
 - * One-piece design, the reagent container is placed on the table, easy to add liquid
 - * The circuit and liquid circuit are completely isolated to enhance system security

Technical Parameters:

Model	SFA-06
Control Temp. Range	RT+5 to 100℃
Measuring Range	0.1 to 100%
Control Temp. Precision	±1℃
Sample Weight	0.5 to 20g(Typically 2 to 5g)
Capacity	6pcs/batch
Solvent Cup Volume	500mL
Solvent Recovery	≥85%
Measuring Time	The extraction time is adjustable, and the alarm will be issued when the time comes
Power	1.4KW
Power Supply	AC 220V, 50/60Hz(Standard); 110V, 50/60Hz(Optional)
External Size(W*D*H)	740*260*660mm
Package Size(W*D*H)	880*380*900mm
Net Weight	26kg
Gross Weight	50kg

Fat Analyzer



Application:

It is widely used in the determination of fat products in the fields of grain, feed, oil, food processing, chemical industry, animal husbandry, soil and fertilizer environmental monitoring, medicine, agriculture, scientific research, teaching, quality supervision and other fields with crude fat content >0.1%.

Features:

- * Equipped with an integral metal bath heating module, featuring a wide temperature control range and high precision.
- * A 7-inch high-resolution color LCD screen, capable of displaying both set temperature and actual temperature simultaneously; it shows the countdown of holding time and alarms when the time is up.
- * The circuit and extraction space are completely isolated, enhancing system safety.
- * PTFE valve core valves ensure safe, controllable, and leak-free solvent recovery.
- * The instrument is equipped with a complete time control system to strictly monitor the experiment.
- * Equipped with over-temperature alarm and timing reminder functions.
- * Lifting connection with linear bearing transmission technology ensures stable lifting and flexible operation.
- * Adopting new ceramic fiber insulation layer technology to keep the machine shell at room temperature, achieving both heat insulation and heat preservation effects.

Technical Parameters:

Model	SFA-06S
Temp. Range	RT+5~280℃
Measuring Range	0.1~100%
Temp. Accuracy	±1℃
Sample Weight	0.5~20g (Normally 2~5g)
Capacity	6pcs/batch
Solvent Cup Volume	80ml
Solvent Recovery	≥85%
Measuring Time	Extraction time is adjustable
Consumption	1000W
Power Supply	AC 220V, 50/60Hz(Standard); 110V, 50/60Hz(Optional, external transformer or custom 110V heating accessory)
External Size(W*D*H)	650*320*680mm
Package Size(W*D*H)	730*400*760mm
Net Weight	35kg
Gross Weight	50kg

Introduction:

According to the principle of Soxhlet extraction, the fat content of grain, grain and food was determined by gravimetric method. The product is fully automatic one-key operation design, easy to operate, stable performance, high accuracy, with: Soxhleter extraction, hot extraction, Soxhleter hot extraction, continuous flow and standard hot extraction and other automatic extraction mode.



Features:

- * One-click automatic completion of the entire process: solvent cup compression, sample basket lifting (lowering), heating, soaking, extraction, reflux, solvent recovery, and valve opening/closing.
- * Room-temperature soaking, hot soaking, hot extraction, continuous extraction, intermittent extraction, and solvent recovery can be arbitrarily selected and combined.
- * Multiple solenoid valve operation modes: inching opening/closing, timed opening/closing, and manual opening/closing.
- * Combined formula management with storage capacity for 99 different analytical programs.
- * Fully automatic lifting and compressing system with high automation, reliability, and convenience.
- * 7-inch color touchscreen with user-friendly interface, easy to use and learn.
- * Menu-driven program editing: intuitive, easy to operate, and can be recalled cyclically multiple times.
- * Up to 40 program segments, supporting multi-temperature, multi-level, or cyclic soaking, extraction, and heating.
- * Integrated metal bath heating block for wide temperature range and high temperature control accuracy.
- * Automatic lifting function of extraction filter cup holder ensures simultaneous immersion of samples in organic solvents, helping improve the consistency of sample determination results.
- * Professionally customized components suitable for various organic solvents, including petroleum ether, ether, alcohols, chloroform, etc.
- * Petroleum ether leakage alarm: the alarm system activates and stops heating when petroleum ether leakage in the working environment reaches a dangerous level.
- * Equipped with two types of solvent cups (Aluminum alloy and glass) for users to choose from.

Technical Parameters:

Model	SFA-06E
Temp. Range	RT+5~300℃
Measuring Range	0.1~100%
Temp. Accuracy	±1℃
Sample Weight	0.5~15g
Capacity	6pcs/batch
Solvent Cup Volume	150ml
Solvent Recovery	≥85%
Solvent Backflow Control	Solenoid valve
Lifting System	Automatic
Display	7 inch color touch screen
Heating Power	1100W
Power Supply	AC 220V, 50/60Hz(Standard); 110V, 50/60Hz(Optional)
External Size(W*D*H)	850*280*680mm
Package Size(W*D*H)	920*370*980mm
Net Weight	70kg
Gross Weight	80kg

Chromatograph

Gas Chromatograph

Features:

- * 7-inch LCD display indicates temperature, gas flow and heating curve.
- * Self-test function and automatic fault recognition function.
- * 8 pcs external extension interfaces can connect with control valve.
- * Equipped with a flame ionization detector (FID).
- * Multi-core and 32-bit embedded hardware system ensures the reliable operation.
- * Synchronous external trigger function and the external signal (auto sampler, thermal analyzer, etc.) can start the equipment and workstation software at the same time.
- * With chromatography workstation software to process data.
- * Memory function: can store 20 sample test modes.
- * One key start up function.



Technical Parameters:

Model	BK-GC112A	
Oven	Capacity	22L
	Temp. Range	RT+5℃~400℃
	Temp. Accuracy	±0.1℃
	Temp. Program	9 step
	Program Total Time	9999.9 min
	Max Temp. Heating Rate	60℃/min
Sample Injector	Temp. Range	RT+7℃~420℃
	Column or split injector can be installed	
	Carrier gas flow control type: Constant pressure mode	
	Max. Quantity	3pcs
	Pre Column Pressure Range	0-400kpa
	Pre Column Pressure Accuracy	0.1kpa
Detector	Flow Setting Range	
	H2: 0-200ml/min	
	N2: 0-150ml/min	
	Temp. Range	RT+7℃~420℃
	Hydrogen Flame Ionization Detector (FID)	Logarithmic amplifier
		High voltage switch control
		Baseline signal display
		Detection limit: ≤3*10 ⁻¹² g/s (Sample: n-hexadecane)
		Baseline noise: ≤5*10 ⁻¹⁴ A
		Baseline draft: ≤6*10 ⁻¹³ A
	Thermal Conductivity Detector (TCD)(Optional)	Dynamic range: 10 ⁷
		RSD: ≤3%
		Sensitivity: 8000mv.ml/mg(Sample: n-hexadecane)
		Baseline noise: ≤0.05mV
		Baseline draft: ≤0.15mV/30min
		Dynamic range: 10 ⁵
Power Supply	AC220V±10%, 50Hz	
Standard Accessory	FID detector, Capillary injection system, Chromatography workstation software,RS232 port, LAN port	
Optional Accessory	TCD detector, Chromatographic column, Gas purifier	
Package Size(W*D*H)	735*725*835mm	
Gross Weight	80kg	

Features:

- * 5.7-inch LCD display indicates temperature, time and gas flow.
- * Can install packed column and capillary column at the same time
- * Self-test, power protection, keyboard lock, automatic ignition and anti power mutation interference function.
- * With chromatography workstation software to process data.
- * Equipped with a flame ionization detector (FID), and TCD, ECD, FPD, NPD are optional. Can install 3 detectors at the same time.
- * Can connect with Internet, realize data transfer and program upgrade automatically.
- * Double column compensation function, which can effectively restrain baseline drift and the influence of background noise.
- * Large capacity oven (300*280*180mm) can hold 2 pcs 0.32mm diameter capillary column (length: 80m).
- * Better thermal insulation effect: when the temp. of oven, vaporizing chamber and detector reach 300℃, the max. temp. of outer chamber is 40℃.



Technical Parameters:

Model	BK-GC7820	
Oven	Temp. Range	RT~450℃
	Temp. Accuracy	≤±0.1℃
	Temp. Program	16-phase
	Max. Temp. Heating Rate	40℃/min
Detector	Hydrogen Flame Ionization Detector (FID)	Detection limit: ≤3*10 ⁻¹² g/s(Sample: n-hexadecane)
		Baseline drift: ≤1*10 ⁻¹³ A/30min
		Linear range: ≥10 ⁷
	Thermal Conductivity Detector (TCD) (Optional)	Sensitivity: >10000mv.ml/mg(Sample: n-hexadecane)
		Linear range: ≥10 ⁵
	Electron Capture Detector (ECD) (Optional)	Detection limit: ≤1*10 ⁻¹⁴ g/ml(Sample: n-hexadecane δ-666)
		Linear range: ≥10 ⁴
	Flame Photometric Detector (FPD) (Optional)	Detection limit: ≤2*10 ⁻¹¹ g/s(S of thiophene)
		Detection limit: ≤1*10 ⁻¹² g/s(P of methyl parathion)
		Linear range (S): ≥10 ³ Linear range (P): ≥10 ⁴
	Nitrogen and Phosphorus Detector (NPD) (Optional)	Detection limit: ≤1*10 ⁻¹² g/s(Azobenzene)
		Detection limit: ≤1*10 ⁻¹² g/s(Marla sulphur phosphorous) Linear range: ≥10 ³
Power Supply	AC220V±10%, 50/60Hz(Optional)	
Standard Accessory	FID detector, Chromatography workstation software, Capillary sampler	
Optional Accessory	Sample injection system, TCD, ECD, FPD and NPD detector, Chromatographic column	
Package Size(W*D*H)	820*670*600mm	
Gross Weight	71kg	

Gas Chromatograph



Introduction:
 BK-GC900 gas chromatograph is a popular, high-performance, multi-functional series of chromatographic instruments. FID, TCD detectors can be combined as needed to meet the needs of ordinary laboratories, daily production, routine detection and trace quantities analysis requirements. It can be widely used in many fields such as petroleum, chemical industry, environment, food safety, disease control, teaching and scientific research.

- Features:**
- * Ethernet communication interface is adopted, so that the instrument can realize long-distance data transmission through the internal LAN of the enterprise, which is convenient for the management of analysis data.
 - * The unique design of the injection port solves the injection discrimination, and the dual-column compensation function not only solves the baseline drift caused by temperature programming, but also reduces the influence of background noise, which can lead to lower detection limits.
 - * Unique vaporization chamber design, smaller dead volume; replacement of accessories such as injection pad, liner, polarizer, collector, nozzle can be done with one hand; packed column, capillary injector, TCD, FID detector and other main bodies. The replacement only requires a wrench to be completely disassembled, and the maintenance is very convenient.
 - * The intelligent rear door system has stepless variable inlet and outlet air volume, which shortens the stable balance time of the system after programmed heating/cooling.

- * The inlet can be installed up to 4 types (packed column, capillary column split/splitless injection system can be used), multiple detectors with the same or different detectors are installed, automatic/manual gas injection device can be selected, top Empty sampler, thermal desorption sampler, pyrolysis furnace sampler, methane reformer, etc.
- * The instrument is equipped with a 4.3-inch color LCD touch screen and keyboard input for user operation.
- * Adopt the dual-stable gas path design of primary pressure stabilizer valve and stabilizer valve/pressure stabilizer valve
- * With seven temperature control devices, the temperature control accuracy is lower than $\pm 0.1^{\circ}\text{C}$
- * With double over-temperature protection and power-off protection function
- * With linkage trigger signal acquisition system
- * With fault self-check and alarm function

Technical Parameters:

Model	BK-GC900	
Oven	Temp. Range	RT+5~450℃
	Temp. Accuracy	≤±0.1℃
	Temp. Program	20-phase
	Max. Temp. Heating Rate	40℃/min
	Time Range	0-655min
	Internal Size	250*270*170mm
Detector	Hydrogen Flame Ionization Detector (FID)	Detection limit:≤5*10 ⁻¹² g/s (100ng/ul n-hexadecane-isooctane solution)
		Temperature 450℃
		Compatible with packed and capillary columns
		Baseline drift:≤2*10 ⁻¹³ A/30min
		Baseline noise: 3*10 ⁻¹⁴ A
		Linear range:≥10 ⁷
	Thermal Conductivity Detector (TCD)	Sensitivity: >5000mv.ml/mg (50mg/ml toluene-benzene solution)
		Temperature 400℃
		Baseline drift:≤0.1mV/30min
		Baseline noise: 0.03mV
		Linear range:≥10 ⁵ (±10%)
Injection Method	Various injection methods are available: (1) Packed column injection; (2) Packed column gasification injection; (3) Capillary split/splitless injection: back pressure valve control technology, linear split; (4) Six-way valve gas injection; (5) On-line injection: continuous injection for 24 hours without supervision	
Power Supply	AC220V±10%, 50/60Hz	
Standard Accessory	FID detector, Chromatography workstation software, Capillary sampler	
Optional Accessory	Sample injection system, TCD detector, Chromatographic column, Nickel catalytic converter	
External Size(L*W*H)	530*502*508mm	
Net Weight	42kg	
Package Size (W*D*H)	750*710*720mm	
Gross Weight	60kg	

Gas Chromatograph

Introduction:

BK-GC901 gas chromatograph can realize full EPC electronic flow control, realize full computer control of the instrument, and can be equipped with a high-precision liquid automatic sampler. It can be widely used in many fields such as petroleum, chemical industry, environmental protection, food safety, disease control, education and scientific research, and can analyze the macro, micro and trace amounts of organic matter, inorganic matter and gas.



Features:

High-precision gas flow control system (EPC)

- * High-precision gas flow control, to ensure the accuracy of GC analysis, to ensure the efficiency of daily analysis, EPC control accuracy 0.01psi.
- * It realizes the self-protection of gas circuit failure, automatic ignition, re-ignition, automatic opening of the gas circuit, and one-key start.
- * A variety of control combination modes of operation, automatic pressure and flow adjustment, control and display, can operate in gas-saving mode.

Color widescreen, unique design of touch keys

- * 7-inch industrial color LCD screen design, more complete display information, more reasonable interface operation.
- * Have two sets of operating systems in Chinese and English to meet different user needs.
- * Adopt resistive touch screen, feel good, durable, double operation of screen and software to achieve seamless connection.

Leading structural design

- * Modular structure design, easy to upgrade, can be equipped with a variety of high-performance detectors such as FID, TCD, ECD, FPD and NPD, etc., to meet the analysis needs of complex samples.
- * Advanced sampler design, unique liner structure and special processing technology to ensure zero adsorption of samples.
- * Adapt to a variety of sample injection methods such as: headspace sampler, thermal desorption analyzer, liquid automatic sampler, easily competent for the analysis of various sample types.
- * Timed self-starting program can easily complete the laboratory online analysis of gas and liquid samples.

Humanized software operating system

- * Adopt advanced 10/100M self-adaptive Ethernet communication interface, built-in IP protocol stack, easily form a local area network, realize long-distance transmission, remote control, and remote diagnosis.
- * Equipped with IBrainChrom workstation, which can support multiple chromatographs (253 sets) to work at the same time, realize data processing and reverse control.

Data processing and countermeasures

- * Have complete audit trail, user rights management, electronic signature and other functions, so that data and documents meet GMP management requirements.
- * The built-in Modbus/TCP server of IBrainChrom workstation can easily connect the analysis results to DCS (distributed control system).
- * 3 independent connection threads that can be connected to local, laboratory supervisors and authorities, allowing them to monitor the operation of the instrument and analyze the data in real time.

Technical Parameters:

Model	BK-GC901	
Oven	Temp. Range	RT+5~450℃
	Temp. Accuracy	≤±0.01℃
	Temp. Program	16-phase
	Max. Temp. Heating Rate	40℃/min
	Time Range	0-999.9min
Detector	Hydrogen Flame Ionization Detector (FID)	Detection limit:≤5*10 ⁻¹² g/s (100ng/ul n-hexadecane-isooctane solution)
		Temperature 450℃
		Compatible with packed and capillary columns
		Baseline drift:≤2*10 ⁻¹³ A/30min
		Baseline noise:3*10 ⁻¹⁴ A
		Linear range:≥10 ⁷
	Thermal Conductivity Detector (TCD)	Sensitivity:>5000mv.ml/mg (50mg/ml toluene-benzene solution)
		Temperature 400℃
		Baseline drift:≤0.1mV/30min
	Electron Capture Detector (ECD)	Baseline noise:0.03mV
		Linear range:≥10 ⁵ (±10%)
	Flame Photometric Detector (FPD)	Detection limit:≤1×10 ⁻¹⁴ g/ml (Sample: n-hexadecane δ-666)
		Linear range: ≥10 ⁴
		Detection limit:≤5*10 ⁻¹² g/s(S of 10ng/uL methyl parathion-ethanol solution)
		Detection limit:≤4×10 ⁻¹² g/s(P of 10ng/uL methyl parathion-ethanol solution)
	Nitrogen and Phosphorus Detector (NPD)	Linear range (S): ≥10 ³
		Linear range (P): ≥10 ⁴
		Temperature 350℃
Injection Method	Capillary column split/splitless sampling (with diaphragm purging function), packed column sampling, valve sampling, gas/liquid automatic sampling system, etc.	
Inlet	1~4, up to 3 capillary column inlets	
Injection Type	Packed column injection, capillary column injection. (Flow setting range: 0~1000mL/min)	
Control Accuracy	Pressure: 0.01KPa; Flow 0.01mL/min	
Maximum Split Ratio	1:999	
Pressure Sensor	Accuracy: <2% of full scale; Repeatability: <± 0.05KPa; Range: 0~0.6MPa	
Flow Sensors	Accuracy: < 5% of full scale; Repeatability: 0.5K Pa (full scale); Output offset (accuracy): ±5%	
Sampling Valve	Can be equipped with multiple imported automatic control valves, which can run automatically in sequence	
Power Supply	AC220V±10%, 50/60Hz	
Standard Accessory	FID detector, Chromatography workstation software, Capillary sampler	
Optional Accessory	Sample injection system, TCD, ECD, FPD and NPD detector, Chromatographic column.	
Package Size (W*D*H)	750*710*720 mm	
Gross Weight	70kg	

BK-100HPLC High Performance Liquid Chromatography System



Introduction:

Liquid chromatography is a technique that uses a liquid as the mobile phase to separate mixtures through a stationary phase. It utilizes the differences in partition coefficients and adsorption capacities of various components between the two phases, achieves separation through repeated distribution equilibrium, and combines with detectors for qualitative and quantitative analysis.

Features:

- * The system offers a comprehensive and flexible isocratic mode, and a binary gradient system is also available. Detection capabilities include PDA, UV/Vis, FL, RI and ELSD.
- * The new optional, solvent manager units can easily switch 4 to 8 kinds of solvent base on binary gradient system. There are several configurations available for user selection.
- * The real-time solvent pressure compensation control enhances detection precision. The integrated check valve ensures stable fluid delivery and simplifies maintenance.

LC-100 HP High-Pressure Constant Flow Pump:

Liquid Infusion System	Dual-piston reciprocating parallel pump, equipped with a binary high-pressure mixer
Flow Rate Range	0.001-10ml/min
Max Output Pressure	42MPa
Flow Accuracy	±1%
Flow Precision	RSD<0.07%
Qualitative Repeatability	RSD6≤0.1%(naphthalene/methanol standards)
Quantitative Repeatability	RSD6≤0.3%(naphthalene/methanol standards)
Pressure Fluctuation	0.1MPa
Power Supply	AC220/110V, 50/60Hz

LC-100 PDA Detector:

Wavelength Range	200~900nm(200~600*), Above 600 nm just for W lamp
Arrays	512
Spectrum Bandwidth	10nm
Light Source	D2 lamp+W lamp
Noise	±5*10 ⁻⁵ AU
Sample Rate	Max100Hz
Interface	LAN, USB, R232

LC-100 UV Detector:

Flow Cell Volume	8.0μl
Light Source	D2 lamp
Wavelength Range	190-680nm
Spectrum Bandwidth	8nm
Wavelength Accuracy	±1nm
Wavelength Precision	Below 0.1nm
Noise	≤0.25×10 ⁻⁵ AU(static)/±1×10 ⁻⁵ AU(dynamic, under given conditions)
Drift	≤0.4×10 ⁻³ AU/h(static)/≤2×10 ⁻³ AU/h(dynamic, under given conditions)
Minimum Detectable Concentration	3×10 ⁻⁹ g/mL(naphthalene/methanol solution)



ARCUS 5 Auto-sampler:

Sample Loading	Standard tray (1) 2 ml*54 vials (default standard configuration) Expanded tray (2) 10 ml*15 vials (3) 4 ml*35 vials Each side could be set with one of the tray types and the tray in one side could be different from the other side; the system could automatically identify the tray type; maximum 108 vials are available(2ml vial)
Vial Height	H ≤ 52mm(including septa and cap-mat)
Metering Pump Volume	200μl(precision: 0.1μl)
Injection Mode	Full loop injection Partial loop injection No waste injection
Automatic Protection	Vial-missing alarm, sample needle fault alarm, pipeline jammed alarm, and leakage alarm
Power Supply	AC115~230V, 50/60Hz
System Test Quantitative Repeatability	Full loop injection: RSD6≤0.3% Partial loop injection: RSD6≤0.5%(injection volume ≥ 10μl) No waste injection: RSD6 ≤1.0%(injection volume ≥ 10μl)
Memory Effect	≤ 0.005%(designated washing procedure)
Maximum Pressure	40 Mpa(conventional) 69 Mpa(ultra-high performance system)



Technical Parameters:

Model	BK-100HPLC (Type I) Isocratic manual system	BK-100HPLC (Type II) Gradient manual system	BK-100HPLC (Type III) Isocratic manual system	BK-100HPLC (Type IV) Gradient manual system	BK-100HPLC (Type V) Binary gradient manual system with PDA
Software With Audit Trail	/	/	Yes	Yes	Yes
Diode Array Detector	/	/	/	/	Yes
High-pressure Constant Flow Pump	LC-100 HP*1	LC-100 HP*2	LC-100 HP*1	LC-100 HP*2	LC-100 HP*2
UV Detector LC-100 UV	Yes	Yes	Yes	Yes	/
Diode Array Detector (With English Workstation)	/	/	/	/	LC-100 PDA*1
Workstation LC-100 WS	Yes	Yes	/	/	/
Workstation EX-Clarity C50	/	/	Yes	Yes	Yes
Manual Sampler 7725i	Yes	Yes	Yes	Yes	Yes
C18 5μm ID4.6*250mm	Yes	Yes	Yes	Yes	Yes
High-precision Mixer EX1600 MX3	/	Yes	/	Yes	Yes
Power Supply	AC220/110V, 50/60Hz				
Optional Accessory	UV detector, RI detector, PDA detector, ELSD detector, FLD100 detector, column, column oven, ARCUS 5 auto-sampler				
Package Size (W*D*H)	450*620*350mm*2	450*620*350mm*3	450*620*350mm*2	450*620*350mm*3	450*620*350mm*2 660*560*500mm*1
Gross Weight	34kg	52kg	34kg	52kg	56kg

BK-1800HPLC High Performance Liquid Chromatography System



Introduction:

Liquid chromatography is a technique that uses a liquid as the mobile phase to separate mixtures through a stationary phase. It utilizes the differences in partition coefficients and adsorption capacities of various components between the two phases, achieves separation through repeated distribution equilibrium, and combines with detectors for qualitative and quantitative analysis.

Features:

- * The system offers a comprehensive and flexible isocratic mode, and also provides binary gradient and quaternary gradient systems. Detection capabilities include PDA, UV/VIS, FL, RI and ELS.
- * The new optional, solvent manager units can easily switch 4 to 8 kinds of solvent base on binary gradient system. There are several configurations available for user selection.
- * The real-time solvent pressure compensation control enhances detection precision. The integrated check valve ensures stable fluid delivery and simplifies maintenance.

EX1800 HPC High-Pressure Constant Flow Pump:

Liquid Infusion System	Type I Reciprocating infusion pumps
Flow Rate Range	62MPa 0.001-10ml/min, n0.001ml/min increments
Max Output Pressure	62MPa(corresponding 9000psi), 90MPa(corresponding 13000psi)
Flow Accuracy	≤0.06%RSD
Flow Precision	≤±0.3%
Compression Compensation	Automatic, continuous, selectable solvent type
Post-column Cleaning	Automatic post-column cleaning function, which can control the cleaning flow rate
Extended Application	Record the number of times the plunger rod seal is used



EX1800 BPC Binary High-Pressure Liquid Delivery Unit:

Liquid Infusion System	Type I Reciprocating infusion pumps
Flow Rate Range	62MPa 0.001-10ml/min,n0.001ml/min increments
Max Output Pressure	62MPa(corresponding 9000psi), 90MPa(corresponding 13000psi)
Flow Accuracy	≤0.06%RSD
Flow Precision	≤±0.3%
Compression Compensation	Automatic, continuous, selectable solvent type
Post-column Cleaning	Automatic post-column cleaning function, which can control the cleaning flow rate
Gradient Setting Range	0~100%
Extended Application	Record the number of times the plunger rod seal is used



EX1800 UV Detector:

Flow Cell Volume	Volume 10.0μl; adopts cone structure /With optional temperature control module
Light Source	Deuterium lamp+tungsten lamp
Wavelength Range	190~900nm
Spectrum Bandwidth	8nm
Wavelength Accuracy	±1nm
Wavelength Precision	Below 0.1nm
Noise	≤0.25*10 ⁻⁵ AU(static)/±1*10 ⁻⁵ AU(dynamic, under specified test conditions)
Drift	≤0.4*10 ⁻⁴ AU/h(static)/±2*10 ⁻⁴ AU/h(dynamic, under specified test conditions)
Sampling Frequency	Up to 100Hz



EX1800 QLPC Quaternary High-Pressure Liquid Delivery Unit:

Liquid Infusion System	Linear motor digital-driven pump
Flow Rate Range	Type I: 0.001-5.0ml/min in steps of 0.001 Type II: 0.001-10.0ml/min in steps of 0.001
Max Output Pressure	70MPa(corresponding 10150psi)
Flow Accuracy	≤0.06%RSD
Flow Precision	≤±0.3%
Compression Compensation	Automatic, continuous, selectable solvent type
Post-column Cleaning	Automatic post-column cleaning function, which can control the cleaning flow rate
Gradient Setting Range	0~100%
Online Degassing	Degassing channel systec AF
Degassing Chamber	480μl
Extended Application	Record the number of times the plunger rod seal is used



EX1800 PDA detector:

Number of Diode Arrays	1024
Light Source	Deuterium lamp+tungsten lamp
Wavelength Range	200~800nm
Wavelength Precision	±0.5nm
Wavelength Accuracy	±1nm
Noise	±5*10 ⁻⁶ AU, under specified conditions
Drift	1*10 ⁻⁴ AU/h, under specified conditions
Sampling Frequency	Up to 100Hz
Spectral Bandwidth	10nm
Flow Cell Path Length	5mm(10mm is optional) Up to 8 channels of digital signal output



Technical Parameters:

Model	BK-1800HPLC (Type I) Isocratic manual system	BK-1800HPLC (Type II) Binary gradient manual system	BK-1800HPLC (Type III) Binary gradient manual system with PDA	BK-1800HPLC (Type IV) Quaternary gradient manual system	BK-1800HPLC (Type V) Quaternary gradient manual system with PDA
Diode Array Detector	/	/	Yes	/	Yes
High-pressure Constant Flow Pump	EX1800 HPC*1	/	/	/	/
Binary High-Pressure Liquid Delivery Unit	/	EX1800 BPC*1	EX1800 BPC*1	/	/
Quaternary High-Pressure Liquid Delivery Unit	/	/	/	EX1800 QLPC*1	EX1800 QLPC*1
Solvent Tray	EX1800 TR*1	EX1800 TR*1	EX1800 TR*1	EX1800 TR*1	EX1800 TR*1
UV Detector	EX1800 UV*1	EX1800 UV*1	/	EX1800 UV*1	/
Manual Sampler 7725i	Yes	Yes	Yes	Yes	Yes
C18 5μm ID4.6*250mm	Yes	Yes	Yes	Yes	Yes
Workstation EX-Clarity C50	Yes	Yes	/	Yes	/
Power Supply	AC220/110V, 50/60Hz				
Optional Accessory	UV detector, RI detector, PDA detector, ELS detector, FL detector, column, column oven, auto-sampler				
Package Size(W*D*H)	720*580*400mm*1 720*580*410mm*2	720*580*410mm*3	720*580*410mm*3	720*580*410mm*3	720*580*410mm*3
Gross Weight	61kg	65kg	68kg	57kg	60kg

Agress1100 High Performance Liquid Chromatography System



Agress1100 HPLC System is a cost-effective product, and it is suitable for use in the production or manufacture which needed to strict cost control.

Characteristics:

- * Affordable
- * VFD display screen
- * Control mode: external/internal
- * Easy to use
- * Superior repeatability



P1100 High Pressure Constant Flow Pump:

Flow Rate	0.001-10.000 mL/min (Step: 0.001 mL/min)
Accuracy	≤+0.3%
Precision	≤0.1% RSD
Max Pressure	42 MPa (6000 psi)
Power	AC 220 V, 50 Hz
Dimension/Weight	420*260*160 mm (L* W* H*) /12 kg



D1100 UV-Visible Detector:

Linearity	1.8 AU
Wavelength Range	190~700 nm
Noise	≤ ± 1.0*10 ⁻⁵ AU
Drift	≤ 2.0*10 ⁻⁴ AU/h
Power	AC220V ± 10%, 50 Hz, 100 W
Dimensions/Weight	420*260*160 mm (L* W* H*) /12 kg



O1100 Column Oven:

Temperature range	Ambient + 5 °C~99 °C
Accuracy	± 0.1 °C
Precision	≤ 0.1 °C
Power	AC220 V ± 10%, 50 Hz, 150 W
Dimensions/Weight	120 * 65 *500 mm (L* W* H*) /8.5 kg

Elitapex HPLC Workstation

Characteristics:

- * Simple operation and convenient use;
- * Optimize the control protocol to make the communication between the workstation and the unit instrument module more smooth;
- * Stable real-time feedback of the status and parameters of each unit module.

Technical Parameters:

Model	Agress1100(Type I)	Agress1100(Type II)
Pump	P1100*1	P1100*2
Detector	D1100*1	
Gradient Mixer	/	TD-1-15*1
Solvent Bottle Tray	ST1100*1	
Sampler Injector	Rheodyne 7725i*1	
Column	Supersil ODS2 5μm ID4.6*200mm*1	
Workstation	Elitapex*1	
Valve Mounting Frame	VB1100*1	
System Kit	Agress1100*1	
Power Supply	AC220V±10%, 50Hz	
Optional Accessory	500ml Solvent bottle*2, Column, Column Oven	
Package Size(W*D*H)	580*400*280mm*3	580*400*280mm*4
Gross Weight	40kg	56kg

EClassical 3100 High Performance Liquid Chromatography System



EClassical 3100 System is perfected from classical HPLC systems manufactured by our company, the high quality has widely recognized by customer. It is suitable for users who are looking for the versatility and robustness. The excellent features ensure the reliability results and improve working efficiency.

Characteristics:

- * Comprehensive and flexible
Isocratic system, binary gradient system, quaternary gradient system is available. Detection capabilities include DAD, UV/Vis, FL, RI and ELSD.
- * Stable and reliable
Advanced USB chip and optoelectronic isolation technology ensuring stable communication.
- * Simple and safe
Powerful software makes it simple to control, capture, manage and analyze. Real-time pressure display, maximum and minimum pressure warning ensure the security.




P3100 High-Pressure Constant Flow Pump:



Flow Range	0.001~10.000 mL/min (step 0.001 mL/min)
Accuracy	≤±0.2%
Precision	≤0.06% RSD
Pressure Range	0-45 MPa
Power	AC 220 V±10%, 50 Hz/80 W
Dimensions/Weight	420*300*175 mm (L* W*H*)/12 kg

P3130 Low-Pressure Quaternary Constant Flow Pump:

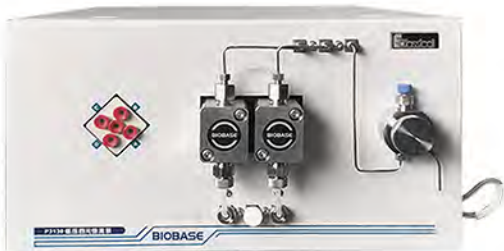

Flow Range	0.001~10.000 mL/min (step 0.001 mL/min)
Gradient Accuracy	≤±1%
Retention Time Repeatability	≤0.1%
Maximum Working Pressure	63 MPa
Communication Methods	UDP Network Communication
Mixed Volume	750μL
Power	AC 220 V±10%, 50 Hz/100 W
Dimensions/Weight	400*300*180 mm (L* W*H*)/15 kg



UV3100 UV-Vis Detector:

Linear	2.0 AU
Wavelength Range	190~700 nm
Noise	≤±0.5*10 ⁻⁵ AU
Drift	≤1.0*10 ⁻⁴ AU/h
Cell	Analytical: Optical path 10 mm, 11μL Semi-prep scale: Optical path 2 mm, 6 μL
Power	AC 220V±10%, 50 Hz/100 W
Dimensions/Weight	420*300*175 mm (L*W*H) /16 kg



DAD3100 Diode Array Detector:

Linear	≥2.0 AU
Wavelength Range	190~800 nm
Noise	≤±1.0*10 ⁻⁵ AU
Drift	≤2.0*10 ⁻⁴ AU/h
Power	AC220 V±10%, 50 Hz/180 W
Dimensions/Weight	500*300*175 mm (L*W*H) /18 kg



O3100 Column Oven:

Temperature Range	Ambient + 5 °C~85 °C
Accuracy	±0.3 °C
Precision	≤0.1 °C
Power	AC220 V±10%, 50 Hz/130 W
Dimensions /Weight	420*300*120 mm (L* W*H)/7 kg

Technical Parameters:

Model	EClassical 3100 (Type I)	EClassical 3100 (Type II)	EClassical 3100 (Type III)	EClassical 3100 (Type IV)
Pump	P3100*1	P3100*2	P3130*1(With mixer)	
Detector	UV3100*1			DAD3100 512*1
Gradient Mixer	/	TD-1-15*1	/	
Solvent Bottle Tray	TP3100*1			
Sampler Injector	Rheodyne 7725i*1			
Column	Supersil ODS2 5µm ID4.6*200mm*1			
Workstation	Kromstation*1			Kromstation+PDA
AD Adapter	/			AD adapter + startup kit
Valve Mounting Frame	ZJ-1*1		ZJ-4*1	
Degasser	/		DG3110*1	
System Kit	EClassical 3100*1			
Power Supply	AC220V±10%, 50Hz			
Optional Accessory	500ml Solvent bottle*2, Column, Column Oven, S3100 Auto-sampler, Degasser		500ml Solvent bottle*4, Column, Column Oven, S3100 Auto-sampler	
Package Size (W*D*H)	600*440*380mm*2	600*440*380mm*3	600*440*380mm*2	600*440*380mm*2
	580*400*280mm*1	580*400*280mm*1	320*190*230mm*1	330*200*260mm*1
			500*360*210mm*1	600*400*240mm*1
Gross Weight	40kg	55kg	45kg	49kg

EClassical 3200 High Performance Liquid Chromatography System



The newly developed EClassical 3200 high performance liquid chromatography system meets the constantly upgraded regulatory requirements and redefines the appearance design of domestic liquid phase, perfects the continuity and integrity of the analysis process, demonstrates the stability of laboratory results, and meets the feasibility.

Feature:

- * Classic, inherited product reliability for more accurate and consistent results.
- * Professional, national standard technology leader, making more effective and applicable.
- * Efficient, perfectly superb compatibility makes more convenient and easier.

O3220 Column Oven:	
Temperature range	Ambient+5~85℃
Accuracy	≤±0.5℃
Precision	≤0.1℃
Power Supply	AC220V±10%, 50Hz/130W
Dimensions/Weight	440*160*470mm/11kg

P3210 High Pressure Constant Flow Pump:		P3220 High Pressure Constant Flow Pump:
Flow Range	0.001~10.000mL/min(step 0.001mL/min)	
Accuracy	≤±2.0%(0.001mL/min~10.000mL/min)	
Precision	≤0.1%(0.100mL/min~10.000mL/min)	
Pressure Range	0~70MPa	
Communication Methods	UDP Network Communication	
Power	AC220V±10%, 50Hz/100W	AC220V±10%, 50Hz/300W
Dimensions/Weight	440*380*180mm/13kg	440*380*180mm/18kg

D3210 UV-Vis Detector:	
Linearity	≥2.0AU
Wavelength Range	190~800nm
Wavelength Repeatability	±0.1nm
Wavelength Accuracy	±1.0nm
Noise	≤1.5×10 ⁻⁵ AU(Single wavelength)
Drift	≤2.0×10 ⁻⁴ AU(Single wavelength)
Light Source	Deuterium lamp, tungsten lamp
Optical Path	Dual wavelength
Response Time	0.1~5s
Sampling Frequency	5Hz/10Hz/20Hz/50Hz; Double wavelength 1Hz
Cell	Optical path 10mm; Pressure 1000psi
Communication Method	UDP Network Communication
Power Supply	AC220V±10%, 50Hz/100W
Dimensions/Weight	440*380*160mm/10kg

P3230 Low Pressure Quaternary Pump:	
Flow Range	0.001~10.000 mL/min(step 0.001 mL/min)
Accuracy	≤±2.0%(0.001mL/min~10.000mL/min)
Precision	≤0.1%(0.100mL/min~10.000mL/min)
Pressure Range	0~70MPa
Communication Method	UDP Network Communication
Power Supply	AC220V±10%, 50Hz/150W
Dimensions/Weight	440*380*180mm/13kg

D3230 DAD Detector:	
Linearity	≥2.0AU
Wavelength Range	190~800nm
Wavelength Repeatability	±0.1nm
Wavelength Accuracy	±1.0nm
Noise	≤1.0×10 ⁻⁵ AU
Drift	≤3.0×10 ⁻⁴ AU
Light Source	Deuterium lamp(tungsten lamp optional)
Exposure Time	25ms, 50ms, 100ms
Sampling Frequency	5Hz(2, 10, 20)
Cell	Optical path 10mm; Pressure 8MPa
Communication Method	UDP Network Communication
Power Supply	AC220V±10%, 50Hz/100W
Dimensions/Weight	440*380*160mm/10kg

Technical Parameters:

Model	EClassical 3200(Type I)	EClassical 3200(Type II)	EClassical 3200(Type III)	EClassical 3200(Type IV)	EClassical 3200(Type V)
Pump	P3210*1	P3220*1	P3230*1	P3220*1	P3230*1
Detector	D3210*1			D3230*1	
Sample Cell	SC3210A			SC3230A	
Solvent Bottle Tray	T3200*1				
Sampler Injector	Rheodyne 7725i*1				
Column	Supersil ODS2 5μm 4.6*250mm*1				
Workstation	Kromstation*1				
Valve Mounting Frame	VB3200*1				
Multifunctional Mounting Frame	MB3200*1				
Column Mounting Frame	CB3200*1				
System Toolkit	EClassical 3200*1				
Power Supply	AC220V±10%, 50Hz				
Optional Accessory	Auto-sampler, column, column oven, evaporative light scattering detector, differential refractive index detector, fluorescence detector, solvent bottle				
Packing Size(W*D*H)	580*470*370mm, 580*470*370mm, 490*350*100mm, 580*470*370mm				
Gross Weight	22kg, 14kg, 4kg, 12kg	22kg, 14kg, 4kg, 13kg	22kg, 14kg, 4kg, 8kg	22kg, 15kg, 4kg, 13kg	22kg, 15kg, 4kg, 18kg

High Performance Liquid Chromatography System

Introduction:

Liquid chromatography is a technique that uses a liquid as the mobile phase to separate mixtures through a stationary phase. It utilizes the differences in partition coefficients and adsorption capacities of various components between the two phases, achieves separation through repeated distribution equilibrium, and combines with detectors for qualitative and quantitative analysis.



Features:

- * The original pipelines and signal lines between the units are integrated into the instrument, which is convenient for installation and maintenance, economical and efficient.
- * The one-way valve is upgraded to an integrated one-way valve, which greatly reduces the maintenance cost while ensuring the service life of the instrument.
- * Intelligent networked chromatography management workstation software is configured.
- * Liquid leakage alarm, pump head pressure loss alarm, etc. are configured.

Technical Parameters:

Model	BK-80HPLC (Type I) Isocratic manual system	BK-80HPLC (Type II) Isocratic manual system
Flow Range	0.001~5.000ml/min	
Flow Stability Error SR	<0.1%	
Flow Setting Value Error SS	≤±1%	
Maximum Working Pressure	40MPa	
Qualitative Repeatability	RSD6≤±0.2%(naphthalene/methanol standard)	
Quantitative Repeatability	RSD6≤±0.5% (naphthalene/methanol standard)	
Pressure Fluctuation	0.1MPa	
Spectrum Bandwidth	8nm	
Wavelength Accuracy	±1nm	
Wavelength Precision	Below 0.1nm	
Noise	≤0.25*10 ⁻⁵ AU(static)/±1*10 ⁻⁵ AU (dynamic, under given conditions)	
Drift	≤0.4*10 ⁻³ AU/h(static)/≤2*10 ⁻³ AU/h (dynamic, under given conditions)	
Minimum Detectable Concentration	5*10 ⁻⁹ g/mL(naphthalene/methanol solution)	
Configuration	Main unit (Isocratic+UV detector), injection valve, control software, 150mm C18 column	Main unit (Isocratic+UV detector), injection valve, control software, 250mm C18 column
Optional Accessories	Column, column oven	
Power Supply	Standard: AC220V 50/60Hz; optional: 110V 50/60Hz	
External Size(W*D*H)	220*455*267mm	
Packing Size(W*D*H)	450*630*450mm	
Gross Weight	20kg	

Thermal Analysis Instruments
 Oxygen Bomb Calorimeter



BK-1A



BK-1A+

Technical Parameters:

Model	BK-1A	BK-1A+
Heat Capacity	(14400~14500) J/K	(14000~15000) J/K
Resolution	0.001 K	
Measurement Accuracy	≤60J/g	
Display	LED	LCD
Repeatability Error	≤0.2% (Grade C)	
Pressure Endurance of Bomb	20 MPa	
Standard Accessory	/	USB port
Consumption	≤150W	
Power Supply	220V, 50Hz	
Packing Size(L*W*H)	760*600*570mm,490*410*300mm	
Gross Weight	45kg,15kg	

Thermal Gravimetric Analyzer



Features:

- * The furnace heating system utilizes double-row precious metal alloy wire.
- * The tray sensor is heat-resistant and corrosion-resistant.
- * The power supply and heat dissipation components are separated from the main unit.
- * The top-opening lid design provides easy operation.
- * The furnace body features a double thermal insulation design for improved linearity.

Technical Parameters:

Model	BK-TGA101
Temperature Range	RT~1150℃
Temperature Resolution	0.01℃
Temperature Fluctuation	±0.1℃
Heating Rate	0.1~100℃/min
Temperature Control Method	PID algorithm control, heating and constant temperature
Constant Temperature Time	0~300min, arbitrarily set
TG Measurement Range	0.01mg~3g, can be expanded to 30g
Weighing System Accuracy	0.01mg
Power Supply	Standard: AC220V 50/60Hz, optional: AC110V 50/60Hz
External Size(L*W*H)	460*512*430mm
Net Weight	26.5kg
Packing Size(L*W*H)	660*590*500mm
Gross Weight	42.1kg

Differential Thermal Analyzer



Application:

Differential thermal analysis (DTA) is a technique that measures the temperature difference between a substance and a reference material under programmed temperature control. A DTA curve describes the relationship between the temperature (ΔT) of the sample and reference material as a function of temperature or time. In a DTA experiment, changes in sample temperature are caused by endothermic or exothermic effects of phase transitions or reactions. Examples include phase transitions, melting, crystal structure changes, boiling, sublimation, evaporation, dehydrogenation, fracture or decomposition reactions, oxidation or reduction reactions, lattice structure disruption, and other chemical reactions.

Features:

- * USB bidirectional communication makes operation more convenient.
- * A 7-inch full-color LCD touch screen provides a user-friendly interface.
- * A nickel-chromium alloy sensor is highly resistant to high temperatures, corrosion, and oxidation.
- * A wide temperature range meets the testing needs of various materials.
- * Supporting analysis software enables real-time acquisition of measurement patterns and online analysis.

Technical Parameters:

Model	BK-DTA3320A
Temperature Range	RT~1200°C
Temperature Resolution	0.01°C
Temperature Accuracy	±0.1°C
Temperature Repeatability	±1.5°C
Measuring Range	0 to ±2000μV
DTA Accuracy	0.01μV
Heating Rate	0.1~100°C/min
Atmosphere Control	Automatic switching of internal programs
Data Interface	Standard USB interface with included data cable and operating software
Power Supply	Standard: AC220V 50/60Hz, optional: AC110V 50/60Hz
External Size(L*W*H)	512*460*400mm
Net Weight	21.2kg
Packing Size(L*W*H)	660*590*500mm
Gross Weight	37.5kg

Differential Scanning Calorimeter



BK-DSC300

BK-DSC300C

BK-DSC300L

YDZ-50

Standard of the Refrigerated Circulator

Optional of the Self-pressurized Liquid Nitrogen Container

Application:

Differential scanning calorimeter can be used to test glass transition temperature, phase transition, melting and thermal enthalpy, product stability, oxidation induction period, specific heat, etc. It is mainly used in the chemical, energy, metallurgy, mining, polymer materials, metal materials and other industries.

Features:

- * Industrial-grade 7-inch touch screen displays rich information.
- * Brand-new metal furnace structure provides a better baseline and higher accuracy.
- * USB communication interface for versatility, reliable and uninterrupted communication, and supports self-recovery.
- * Automatically switches between two atmosphere flow rates with fast switching and short stabilization time. Also includes an additional shielding gas input.
- * Simple and easy-to-use software.

Technical Parameters:

Model	BK-DSC300	BK-DSC300C	BK-DSC300L
Temperature Range	RT~600°C	-35~600°C	-150~600°C(Optional of the liquid nitrogen container); RT~600°C(Not optional of the liquid nitrogen container)
Temperature Resolution	0.001°C		
Temperature Fluctuation	±0.001°C		
Temperature Repeatability	±1°C		
Heating Speed	0.1~80°C/min	0.1~100°C/min	0.1~100°C/min
Cooling Speed	/	0.1~20°C/min	0.1~40°C/min
Constant Temperature Time	Program setting ≤24h		0~400min
Temperature Control Method	Heating, constant temperature, cooling		
DSC Range	0 to ±600mW	0 to ±800mW	0 to ±600mW
DSC Resolution	0.01uW		
DSC Sensitivity	0.001mW		
Gas Flow	0~200mL/min	0~200mL/min	0~300mL/min
Gas Pressure	≤0.5MPa	≤0.5MPa	≤0.2MPa
Power Supply	Standard: AC220V 50/60Hz, optional: AC110V 50/60Hz		
External Size(L*W*H)	488*428*237mm		
Net Weight	13.4kg	15kg	15.3kg
Packing Size(L*W*H)	615*545*490mm	Main Unit: 615*545*490mm; Accessory: 540*455*815mm	615*545*490mm
Gross Weight	26.2kg	Main Unit: 28.5kg; Accessory: 41.6kg	29.6kg

Gas Generator
 Hydrogen Generator



Introduction:
 The hydrogen generator is to generate hydrogen by electrolyzing water through PEM or AWE electrolysis technology. It consists of water tank, electrolyzer, power supply, gas-water separator, drying pipe, pressure controller and other parts.

Application:
 Hydrogen generator can be used as gas and carrier gas for GC (gas phase), reactive gas for ELCD (conductance detector), and reactive gas for ED (Atomic emission spectrometry detector).

- Features:**
 - * Safe use, water shortage shutdown, overpressure shutdown.
 - * Easy to operate, turn on the power to the standby state, panel start and stop button control start and stop.
 - * The working status shows the flow, and the fault status indicates the fault information.
 - * Automatic constant pressure.

Model	BK-HYG-300P
Output Flow	0~300ml/min
Hydrogen Purity	99.999%
Output Pressure	4kg/cm³(about 0.4Mpa)
Pressure Stability	<0.001MPa
Environment Temp	1~40°C
Relative Humidity	<85%
Consumption	150W
Power Supply	110V/220V, 50/60Hz
External Size	410*370*220mm
Package Size	460*430*270mm
Net Weight	10kg
Gross Weight	14kg

- Features:**
 - * Fast hydrogen production: The hydrogen generator can produce hydrogen without preheating.
 - * High safety: The volume of the internal gas path in the hydrogen generator is less than 150ml, and the hydrogen is produced immediately after use, eliminating the risk of hydrogen storage.
 - * Low long-term use cost: just add pure water during the operation of the hydrogen generator, and the cost of consumables is low.
 - * Green and environmental protection: The hydrogen generator uses electrolysis of water to produce hydrogen. During the hydrogen production process, only hydrogen and oxygen are produced, which has no pollution to the environment.
 - * Easy to use: The hydrogen generator can be used continuously as a gas source, avoiding frequent replacement of gas cylinders.



Model	BK-HYG-600P
Hydrogen Purity	≥99.999%
Rated Flow	600ml/min
Output Pressure	0-0.4MPa
Safety Valve Releases Pressure	0.5MPa±0.05MPa
Working Noise	≤55dB
External Size	430*220*380mm
Net Weight	11kg
Power Supply	AC220V/110V,50Hz/60Hz
Packing Size	670*470*630mm
Gross Weight	20kg

Pure Water Hydrogen Generator



Laboratory Type

- Features:**
 - * SPE technology.
 - * No corrosion and pollution.
 - * High purity hydrogen (99.999%)(for Laboratory type).
 - * Suitable for all kinds of GC(Gas chromatography).
 - * Stable output flow, safe and convenient to operate, various alarm devices (over pressure alarm, water shortage alarm, water accumulated alarm).
 - * The electrolytic cell adopts imported ionic membrane, which has the characteristics of resistance, durability and long life.(for Breathing Type (plastic shell)).
 - * The output flow of electrical automatic control system is stable and the fluctuation is small. (for Breathing Type (plastic shell)).

Model	HGC-200	HGC-300	HGC-600
Type	Laboratory type	Laboratory type	Laboratory type
Output Flow(ml/min)	0~200	0~300	0~600
Output Pressure	0.4MPa/0.02~0.7MPa (under stable pressure)	0.4MPa/0.02~0.7MPa (under stable pressure)	0.4MPa/0.02~0.7MPa (under stable pressure)
Hydrogen Purity	>99.999%	>99.999%	>99.999%
Silicon tube	Yes	Yes	Yes
Pressure stability	<0.001Mpa		
Consumption	120W	150W	300W
Power Supply	AC 110V/ 220V±10%, 50/60Hz		
External Size (W*D*H)	350*220*380mm	350*220*380mm	350*220*380mm
Package Size (W*D*H)	500*370*540mm	500*370*540mm	500*370*540mm
Net Weight	11kg	11kg	13kg
Gross Weight	12kg	12kg	14kg

Hydrogen Generator



HG-300II

HG-500II

Features:

- * Easy to operate, safe and reliable, one-time add alkali, daily use only need to supplement distilled water. Turn on the power switch to produce hydrogen.
- * The air passage part is made of stainless steel pipe.Electrolytic polishing, ultrasonic cleaning. With over - pressure protection device, two - stage purification.
- * Unique anti-return device, to ensure that the instrument no liquid back phenomenon.
- * Cartridge type electrolytic tank, electrolytic materials imported special precious metals, effectively improve the electrolytic efficiency, constant cell temperature, promote the service life of the electrolytic tank greatly improved.
- * Stable output flow and automatic tracking.Purity does not decay, can be used continuously.

Technical Parameters:

Model	HG-300II	HG-500II
Output Flow(ml/min)	0-300 ml/min	0-500 ml/min
Output Pressure	0-0.5 Mpa(Factory setting 0.4Mpa)	
Purity	> 99.999%	
Surrounding Requirement	Temperature: 10~40℃	
	Humidity: ≤85%	
Consumption	220W	
Power Supply	AC220V±10%, 50Hz±5%(Standard) AC110, 60Hz(Optional)	
Instrument Size(W*D*H)	320*180*370mm	
Package Size(W*D*H)	390*250*460mm	
Net Weight	10kg	
Gross Weight	14kg	

Nitrogen Generator



NG-300II

NG-500II

NG-300P

NG-500P

Features:

- * Improved double-cathode stainless steel electrolytic separation cell. Nitrogen production by electrolysis and oxygen exhaust are carried out simultaneously, and the electrolyte circulation is unimpeded.
- * The electrolysis separation cell has large electrolysis area, low cell temperature, large gas production, and higher nitrogen purity.
- * The unique anti-liquid return device ensures that the instrument will never return liquid.
- * Equipped with the function of voltage stabilization and automatic closing of the gas circuit after power failure.
- * Adopt advanced switching power supply to improve the efficiency of electrolysis and separation.
- * Small size and light weight, some products use oil-free compressors. (NG-300P/500P).
- * Need external air source(NG-300II/500II).

Technical Parameters:

Model	NG-300II	NG-500II	NG-300P	NG-500P
Output Flow(ml/min)	0-300 ml/min	0-500 ml/min	0-300 ml/min	0-500 ml/min
Output Pressure	0-0.5 Mpa(Factory setting 0.4Mpa)			
Purity	> 99.997%			
Surrounding Requirement	Temperature10~40℃			
	Humidity ≤85%			
Consumption	80W	120W	650W	750W
Power Supply	AC220V±10%, 50Hz±5%(Standard) AC110, 60Hz(Optional)			
Instrument Size(W*D*H)	320*220*370mm		400*300*640mm	
Package Size(W*D*H)	390*280*430mm		475*375*720mm	
Net Weight	15kg		40kg	
Gross Weight	17kg		42kg	

Nitrogen & Hydrogen & Air Generator



- Features:**
 - * Compact structure, high integration, easy to use, saving laboratory space.
 - * Stainless steel gas storage tank, safe and reliable, can replace laboratory cylinders.
 - * Hydrogen part: automatic anti-return alkali, automatic flow tracking, three-stage filtration.
 - * Nitrogen part: automatic anti-return alkali. Automatic flow tracking. Three-stage filtration.
 - * Oil-free compressor, better air quality, heat insulation pad choose Dow, cylinder type electrolytic cell electrolytic area, long service life.(NHA-300G)
 - * Air part: use oil-free compressor, stainless steel gas tank, two-stage voltage stabilization, three-stage filter, high precision, automatic drainage and perfect protection measures.

Technical Parameters:

Model		NHA-300G	NHA-300II
Output Flow(ml/min)	Nitrogen Hydrogen	0-300 ml/min	
Output Pressure	Nitrogen Hydrogen Air	0-0.5 Mpa(Factory setting 0.4Mpa)	
Purity	Nitrogen	> 99.997%	
	Hydrogen	> 99.999%	
Surrounding Requirement	Temperature	10~40℃	
	Humidity	≤85%,No large amount of dust and corrosive gas	
Consumption		850W	500W
Power Supply		AC220V±10%, 50Hz±5%(Standard) AC110V, 60Hz(Optional)	
Instrument Size(W*D*H)		300*455*665mm	
Package Size(W*D*H)		530*380*750mm	
Gross Weight		46kg	39kg

Oxygen Production System



- Introduction:**

Integrated medical molecular sieve oxygen production system, is a new type of equipment that extracts oxygen from air using molecular sieve as adsorbent and advanced pressure swing adsorption (PSA) technology.
- Features:**
 - * Overall structure assembly, easy installation, unique technology to achieve zero pressure start.
 - * Professional oxygen filter, improve filtration efficiency.
 - * Precision gas mass flow controller, real-time measurement and control of oxygen flow.
 - * 10-inch color human-computer interaction interface, automatic control, easy to use.

Technical Parameters:

Model	BSZY-3	BSZY-6	BSZY-10
Oxygen Supply Flow(m³/h)	3.0	6.0	10.0
Oxygen Concentrations	≥90%		
Oxygen Outlet Pressure	0.2~0.5MPa adjustable		
Consumption(kW)	9	13	25
Power Supply	AC380V, 50Hz; Three-phase AC 220V, 50Hz(Optional)		
Noise	≤85dB(A)		
Using Temp.	5~40℃		
Environmental Humidity	≤80%		
External Size(W*D*H)	1900*1380*1945mm	1900*1430*1945mm	2100*1530*2115mm
Package Size(W*D*H)	2070*1520*2100mm	2070*1570*2100mm	2270*1670*2270mm
Net/Gross Weight(kg)	960/1120	1030/1200	1300/1500

Simple Steam Generator



Applications:

The simple steam generator has a wide range of applications, and can provide clean high-temperature steam for equipment that requires steam in industries such as disinfection and sterilization, medical pharmaceuticals, cleaning machines, experimental research, and high-temperature cleaning. This product is an electric heating simple steam generator.

Features:

- * High thermal efficiency: up to 98%.
- * Fast steam generation: it takes 4 minutes.
- * Clean steam: the inner tank is made of stainless steel.
- * Automatic control: one-button start, easy to operate.
- * Multiple protections: over temperature, pressure, anti-dry, low water level.

Technical Parameters:

Model	BK-ZFQ-Y90
Rated Steam Capacity	120kg/h
Rated Working Pressure	0.7MPa
Rated Steam Temp.	170℃
Water Volume	29L
Power Supply	380v 50/60Hz
External Size	900*730*1180mm
Packing Size	1000*770*1250mm
Gross Weight	200kg

Electric Steam Generator



Features:

- * Safe and reliable
- * High thermal efficiency
- * Fast steam production
- * Steam is cleaner
- * Fully automatic control
- * Multiple alarm protection

Applications:

- * Hospital disinfection supply room: large sterilizer (without self-contained steam drum, external gas source is required)
- * Washing industry: washing machines, dryers and other equipment that require external steam.
- * Food machinery industry: Steam boxes and other equipment that require external steam.
- * Biomedicine: Reactors, fermentation tanks and other equipment that require external steam.
- * Bridge concrete maintenance, hot water supply for hotel bathing.

Technical Parameters:

Model	BK-ZFQ-96	BK-ZFQ-120
Rated Steam Capacity	120kg/h	150kg/h
Rated Working Pressure	0.65MPa	0.65MPa
Rated Steam Temp	168℃	168℃
Water Volume	23L	23L
Electric Heating Power	96KW	120KW
Power Supply	380V 50Hz	
External Size	1315*880*1790mm	1315*880*1790mm
Packing Size	1480*1030*2110mm	1480*1030*2110mm
Gross Weight	500kg	500kg

Jacketed Glass Reactor

Application:

Jacketed glass reactors are designed for synthetic reaction of different types of materials in a controlled temperature and vacuum environment. Each reactor features adjustable stirring speeds and a constant pressure feeding funnel that allows you to add material to the vessel at a uniform and controlled speed. The built-in condenser makes it possible to recover some materials, also at a controlled rate of speed.



Features:

- * GG17 high borosilicate glass, with good chemical and physical properties.
- * The evaporation and back-flow of reaction material can be controlled.
- * The heat of reaction could be taken away quickly through water, cycling in the jacketed glass.
- * The design of large bottle mouth, easier to clean.
- * It can be used as a distillation syntheses device.
- * The sealing performance is 0.098 Mpa.
- * LCD display, easier and more convenient to measure temperature.

Optional Equipment:

- * Circulating water vacuum pump: (JGR-1L~5L, recommend mode SHZ-DIII, JGR-10L~100L, recommend model SHZ-95B)
- * Refrigerated Circulator
- * Circulating water/oil bath

Technical Parameters:

Model	JGR-1L	JGR-2L	JGR-3L	JGR-5L	JGR-10L	JGR-20L	JGR-30L	JGR-50L	JGR-100L
Reaction Flask Capacity	1L	2L	3L	5L	10L	20L	30L	50L	100L
Stirring Power	60W				120W				180W
Stirring Speed	0~600rpm(Max.1300 customized)								
Stirring Shaft Diameter	12mm								15mm
Motor Torque(g/cm)	2000	2400		4800	1000	1200		1500	3000
Power Supply	AC110/220V, 50/60Hz								
Package Size (W*D*H)	1260*430*460mm		1300*580	1310*600	1230*610	1320*630	1650*660*780mm		1840*720
*540mm			*540mm	*750mm	*750mm	*910mm			
Gross Weight	40kg	40kg	53kg	56kg	81kg	85kg	100kg	108kg	151kg

High Pressure Reactor

Application:

The Reactor is a stirring device for reacting gas -liquid, liquid-liquid, liquid -solid or gas-liquid-solid materials. It can fully stir and react various chemical materials under higher pressure, vacuum and temperature. It is a non-leakage reaction equipment for vulcanization and hydrogenation in petroleum, chemical,organic synthesis, polymer material polymerization, food and other processes.

Features:

- * Real-time monitoring of reaction pressure in the kettle.
- * High power agitator motor, strong and stable performance.
- * Using static sealing structure, the stirrer and the motor drive are connected by a magnetic coupling.
- * The medium and mixing parts are completely sealed to work.

Technical Parameters:

Model	HPR-0.5L	HPR-1L	HPR-2L	HPR-3L	HPR-5L	HPR-10L	HPR-20L	HPR-50L	HPR-100L
Capacity(L)	0.5	1	2	3	5	10	20	50	100
Pressure(MPa)	22							10	6
Temp(°C)	350								
Stirring Speed(r/min)	50~1000				50~600				
Material	SS304/SS316/Hastelloy alloy								
Heating Power(kW)	1.5	1.5	2	3	4	8	10	15	18
Power Supply	Standard: 220V, 50/60Hz; optional: 110V, 50/60Hz				Standard: 220V, 50/60Hz; optional: 380V, 50/60Hz			380V, 50/60Hz	
Packing Size(mm)	620*480 *1430	490*690 *1490	740*590 *1590	770*520 *1580	840*590 *1650	1040*690 *1450	1020*670 *1430	980*800 *1570	990*840 *1730
Gross Weight(kg)	100	101	150	170	196	218	280	480	680

Jar Tester

Application:

It's a testing instrument used to carry out the jar test during procedure of water treatment. It is used to simulate the process of adding agent , reaction, coagulation and settling which happen during the procedure of water treatment (including purification of drinking water and sewage treatment),widely used in scientific research, water supply plant and sewage treatment plant, colleges and universities, water treatment agent manufacturer etc.



BJT-4



BJT-6

Features:

- * LCD display
 - * Synchro run, independent run
- * Store 12 groups of programs
 - * Automatic calculating G & GT value
 - * Automatic agent dosing and elevating

Technical Parameters:

Model	BJT-4(Portable)	BJT-6(Desktop)
Beakers	4pcs	6pcs
Acrylic Beaker	Round, 0.6L Φ95*130mm	Round, 1.0L Φ110*180mm
		Square optional, 1.5L 110*110*170mm
Speed Range	10~1000rpm, stepless speed regulation	
Speed Accuracy	±0.5%	
Speed Gradient(G value)	10~1000/s. Just for round beaker	
Running Time	Each step: 0~99min99s, 10 steps each program	
Measurement Temp. Range	0~50℃	
Measurement Temp. Accuracy	±1℃	
Consumption	80W	180W
Power Supply	AC220V±10%, 50Hz	
External Size(W*D*H)	550*390*210mm	1080*350*400mm
Package Size(W*D*H)	610*450*270mm	950*470*500mm
Gross Weight	11kg	33kg

Automobile Exhaust Analyzer

Applications:

Used to measure vehicle emissions of gas concentration.



BK-EA201



BK-EA301



BK-EA401



BK-EA501

Features:

- * With built-in printer
- * With a high-brightness digital display
- * Automatic zero, linear automatic data processing, auto-alarm when the gas line blocking

Technical Parameters:

Model	BK-EA201	BK-EA301	BK-EA401	BK-EA501
Measuring Range	HC: 0~10000*10 ⁻⁶ (ppm)vol CO: 0~10*10 ⁻² (%)vol	HC: 0~10000*10 ⁻⁶ (ppm)vol CO: 0~10*10 ⁻² (%)vol NO _x : 0~5000*10 ⁻⁶ (ppm)vol	HC: 0~10000*10 ⁻⁶ (ppm)vol CO: 0~10*10 ⁻² (%)vol CO ₂ : 0~20*10 ⁻² (%)vol O ₂ : 0~25*10 ⁻² (%)vol λ: 0.50~3.00 CO _{cor} :0~10*10 ⁻² (%)vol	HC: 0~10000*10 ⁻⁶ (ppm)vol CO: 0~10*10 ⁻² (%)vol CO ₂ : 0~20*10 ⁻² (%)vol O ₂ : 0~25*10 ⁻² (%)vol NO _x : 0~5000*10 ⁻⁶ (ppm)vol λ:0.50~3.00 CO _{cor} :0~10*10 ⁻² (%)vol
Indicating Error	HC±12*10 ⁻⁶ (ppm)vol CO±0.06*10 ⁻² (%)vol	HC±12*10 ⁻⁶ (ppm)vol CO±0.06*10 ⁻² (%)vol NO _x ±25*10 ⁻⁶ (ppm)vol	HC±12*10 ⁻⁶ (ppm)vol CO±0.06*10 ⁻² (%)vol CO ₂ ±0.5*10 ⁻² (%)vol O ₂ ±0.1*10 ⁻² (%)vol	HC±12*10 ⁻⁶ (ppm)vol CO±0.06*10 ⁻² (%)vol CO ₂ ±0.5*10 ⁻² (%)vol O ₂ ±0.1*10 ⁻² (%)vol NO _x ±25*10 ⁻⁶ (ppm)vol
Stability	Moment drift≤±3%			
Repeatability	≤±2%			
Response Time	95% response is not more than 10 seconds			
Preheating Time	8min (preheating 3min emergency detection)			
Power Supply	AC110~240V±10%, 50/60Hz; Optional DV12V			
Package Size(W*D*H)	620*435*295mm			
Gross Weight	12.5kg			

Refractometer
 Portable Digital Refractometers



PDR-series



PDR-F series

Features:

- * Wide choice-over 20 models available
- * Automatic temperature compensation
- * Automatic power management
- * With IP65 verification of waterproof and dustproof (only PDR-F series)

Technical Parameters:

Model	Scale	Range	Min. Reading	Accuracy	Temp. Range	Temp. Precision	Power Supply	Packing Size (W*D*H)mm	G.W. (kg)
PDR-35	Brix (%)	0~35%	0.1	±0.2	0°C~40°C (32°F~104°F)	± 0.5°C(1°F)	2xAAA (1.5V)	165*95*60	0.35
	Refractiv Index	1.3330~1.3900	0.0001	±0.0003					
PDR-45	Brix (%)	0~45%	0.1	±0.2					
	Refractiv Index	1.3330~1.4098	0.0001	±0.0003					
PDR-85	Brix (%)	0~85%	0.1	±0.5					
	Refractiv Index	1.3330~1.5100	0.0001	±0.0005					
PDR-92	Brix (%)	58~92%	0.1	±0.2					
	Refractiv Index	1.4370~1.5233	0.0001	±0.0003					
PDR- HN1	Brix (%)	58~92%	0.1	±0.2					
	° B, e	38~43	0.1	±0.1					
	Water (IHC2002)	13~25	0.1	±0.1					
	Refractiv Index	1.4370~1.5233	0.0001	±0.0003					
PDR-HN2	Brix (%)	58~92%	0.1	±0.2					
	° B, e	38~43	0.1	±0.1					
	Water (IHC2002)	17~27	0.1	±0.1					
	Refractiv Index	1.4370~1.5233	0.0001	±0.0003					
PDR-A1	Salinity	0~28%	0.1	±0.2					
	Refractiv Index	1.3330~1.3900	0.0001	±0.0003					
PDR-S1	Brix (%)	0~35%	0.1	±0.2					
	Salinity	0~28%	0.1	±0.2					
	Refractiv Index	1.3330~1.3900	0.0001	±0.0003					

Technical Parameters:

Model	Scale	Range	Min. Reading	Accuracy	Temp. Range	Temp. Precision	Power Supply	Packing Size (W*D*H)	G.W. (kg)
PDR-R1	SERUM P.(g/dl)	0~12g/dl	0.001	±0.001	0°C~40°C (32°F~104°F)	± 0.5°C(1°F)	2 x AAA (1.5V)	165*95*60mm	0.35
	URINE SP.G	1.000~1.050	0.1	±0.1					
	Refractiv Index	1.3330~1.3900	0.0001	±0.0003					
PDR-R2	SERUM P.(g/dl)	0~14g/dl	0.1	±0.1					
	URINE SP.G(dog)	1.000~1.060	0.001	±0.001					
	Refractiv Index	1.3330~1.3900	0.0001	±0.0003					
PDR-R3	SERUM P.(g/dl)	0~14g/dl	0.1	±0.1					
	URINE SP.G(cat)	1.000~1.060	0.001	±0.001					
	Refractiv Index	1.3330~1.3900	0.0001	±0.0003					
PDR-L1	Alcohol	0~60%v/v	0.1	±0.3					
PDR-L2	Alcohol	0~60%w/w	0.1	±0.5					
PDR- FWN1	Brix(%)	0~35%	0.1	±0.2					
	VOL AP(%)	0~22%	0.1	±0.2					
	Oe(Germany)	0~150	1	±1					
	KMW	0~25	0.1	±0.2					
PDR-FWN2	Brix(%)	0~35%	0.1	±0.2					
	VOL AP(%)	0~22%	0.1	±0.2					
	Oe(Germany)	30~150	1	±1					
	KMW	0~25	0.1	±0.2					
PDR-FWN3	Brix(%)	0~35%	0.1	±0.2					
	VOL AP(%)	0~22%	0.1	±0.2					
	Oe(Switzerland)	0~150	1	±1					
	KMW	0~25	0.1	±0.2					
PDR-FK1	Soybean milk concentration	0~35%	0.1	±0.3					
PDR-FC1	Glycol	32~-50°F	0.1°F	±1°F					
	Propanediol	32~-50°F	0.1°F	±1°F					
	Battery fluid	1.00~1.50sg	0.01sg	± 0.01sg					
	Clearance	0~40°F	0.1°F	±1°F					
PDR-FC2	Glycol	0~-50°C	0.1°C	±1°C					
	Propanediol	0~-50°C	0.1°C	±1°C					
	Battery fluid	1.00~1.50sg	0.01sg	± 0.01sg					
	Glass water	0~-40°C	0.1°C	±1°C					

Portable Digital Refractometers



PDR-series



PDR-F series

Technical Parameters:

Model	Scale	Range	Min. reading	Accuracy	Temp. Range	Temp. Precision	Power Supply	Packing Size (W*D*H)mm	G.W. (kg)
PDR-WN1	MASS S/W(%)	0~35%	0.1	±0.2	0°C~40°C (32°F~104°F)	±0.5°C(1°F)	2xAAA (1.5V)	165*95*60	0.35
	VOL AP(%)	0~22%	0.1	±0.2					
	Oe(Germany)	0~150	1	±1					
	KMW	0~25	0.1	±0.2					
PDR-WN2	Brix(%)	0~35%	0.1	±0.2					
	VOL AP(%)	0~22%	0.1	±0.2					
	Oe(Germany)	30~150	1	±1					
	KMW	0~25	0.1	±0.2					
PDR-WN3	Brix(%)	0~35%	0.1	±0.2					
	VOL AP(%)	0~22%	0.1	±0.2					
	Oe(Germany)	0~150	1	±1					
	KMW	0~25	0.1	±0.2					
PDR-K1	Soybean milk concentration	0~35%	0.1	±0.3					
PDR-C1	Glycol	32~-50°F	0.1°F	±1°F					
	Propanediol	32~-50°F	0.1°F	±1°F					
	Battery fluid	1.00~1.50sg	0.01sg	± 0.01sg					
	Clearance	0~-40°F	0.1°F	±1°F					
PDR-C2	Glycol	0~-50°C	0.1°C	±1°C					
	Propanediol	0~-50°C	0.1°C	±1°C					
	Battery fluid	1.00~1.50sg	0.01sg	± 0.01sg					
	Clearance	0~-40°C	0.1°C	±1°C					

Portable Refractometer

Application:

Low Range: fruit juice, tomato juice, cola and most kinds of beverage

Middle Range: concentrated fruit juice, canned food, sugar solution inclusions, sauce, ketch up, seasoning and many kinds of industry fluids

High Range: liquid sugar, honey etc.

They can be used for industry fluid testing, such as for vegetable oils, industry, and many other chemical liquids or laboratory use fluids



Technical Parameters:

	Model	Range	Minimum Scale	Package Size(W*D*H)	Gross Weight
Brix	BK-PR5	0~5%	0.1%	200*95*80mm	0.35kg
	BK-PR10	0~10%	0.1%		
	BK-PR18	0~18%	0.1%		
	BK-PR20	0~20%	0.1%		
	BK-PR32	0~32%	0.2%		
	BK-PR50	0~50%	0.5%		
	BK-PR60	0~60%	0.5%		
	BK-PR62	28~62%	0.2%		
	BK-PR82	45~82%	0.5%		
	BK-PR92	58~92%	0.2%		
	BK-PR80	0~80%(1 ranges)	0.5%		
	BK-PR90	0~90%(1 ranges)	0.5%		
Honey	BK-PRN3	58~92% Brix	0.5% Brix		
		38~43 oBe'	0.5 oBe'		
		12~27% Water	1% Water		
Salinity	BK-PRA1	0~100‰	1‰		
		1.000~1.070	0.005		
	BK-PRA2	0~28%	0.2%		
	BK-PRA3	0~35%	0.5%		
	BK-PRA4	0~40 PPT	1‰		
	BK-PRS1	0~100‰ Salinity	1‰		
		1.000~1.070	0.005		
	BK-PRS2	0~10% Brix	0.1%		
		0~28% Salinity	0.2%		
		0~32% Brix	0.2%		

ABBE Digital Refractometer

Features for BK-RZT:

- * Full automatic measuring.
- * Touch Screen.
- * LCD temperature display, automatic correction and saving the data.
- * Standard RS232, USB and U disk interface.



Features for BK-R2S:

- * Hard glass prism.
- * Standard RS232 interface.
- * Measure the Brix of sugar solution.
- * Visual aim and LCD display.
- * Automatic correcting of the effect of temperature on the Brix.
- * Measuring refractive index nD of transparent or translucent liquid and solid substances.

Technical Parameters:

Model	BK-RZT	BK-R2S
Measuring Range	1.30000~1.70000nD, Brix: 0-100%	1.3000~1.7000nD, Brix: 0-100%
Measuring Resolution	±0.00001nD, Brix: ±0.01%	±0.0001nD
Measuring Accuracy	±0.0002nD, Brix: ±0.1%	±0.0002nD, Brix: ±0.1%
Test Mode	8	/
Temperature Range	10~60℃	0~50℃
Temperature Resolution	0.1℃	
Temperature Accuracy	0.1℃	
Interface	RS232, USB, U disk	RS232
Display	7" LCD touch screen	LCD
Prism	Hard glass	
Power Supply	AC 110/220V, 50/60Hz	
External Size(W*D*H)	340*200*110mm	210*110*310mm
Package Size(W*D*H)	500*330*220mm	370*240*470mm
Gross Weight	9kg	10kg

Automatic Digital Refractometer



Features:

- * Multiple measurement modes: refractive index of spice and plant oil, F42 and F55 fructose syrup, concentration of glucose and sucrose, solid content, water content of honey, nD20, etc.
- * It meets graded management, provides scientific and user-friendly operation.
- * Fast measurement, only needs a small amount of samples.
- * Accurate detection and thermostatic control.
- * Prism is made of sapphire.

Technical Parameters:

Model	BK-R756
Measuring Range	nD: 1.30000~1.70000 Brix: 0~100%
Measuring Accuracy	Refractive index nD: ±0.0002 Brix: ±0.1%
Measuring Resolution	Refractive index nD:±0.00001 Brix:±0.01%
Temperature	Temperature display range : 0~100℃
Audit Trail	Optional(FDA)
Thermostatical Control Range	5~85℃
Temperature Control Accuracy	±0.02℃
Temperature Control Mode	Peltier (Built-in)
Interface	USB/Keyboard/Mouse/Universal Printer/ Ethernet/Optional:WLAN
Display	8 inch color touch screen
Data Storage	16G
Prism	Artificial sapphire
Power Supply	100V~240V, 50/60Hz, 150W
Gross Weight	5kg
Package Size	570*460*300mm

Polarimeter

Automatic Polarimeter



BK-P1/2

Features:

- * 7 inch color touch LCD screen
- * Photoelectric test and microcomputer control.
- * Preheating is not needed. (Only for BK-P1 and BK-P2 Model).
- * Dark-colored sample can be measure. (Only for BK-P1 and BK-P2 Model).
- * Automatic repetition-measurement for 6 times, and calculation of average value and means square root.
- * Sample chamber adopts constant temperature designing in order to reduce the temperature heating influence.

Technical Parameters:

Model	BK-P1	BK-P2
Light Source	LED + interference filter	
Measuring range	±45°(optical rotation) /±120° Z(sugar)	
Wavelength	589nm	
Measuring Accuracy	±0.01°(-15°≤ optical rotations ≤ +15°) ±0.02°(optical rotation < -15°or optical rotation > +15°)	
Repeatability	0.002°(optical rotation)	
Sample Transmittance	1%	
Temperature Control Range	/	15~30℃
Temperature Accuracy	/	±0.5℃
Test Mode	Optical rotation,specific rotation, concentration,sugar degree	
Test Tube	200mm, 100mm	200mm, 100mm, 100mm(Constant Temperature tube)
Interface	USB&RS232	
Power Supply	AC 110/220V, 50/60Hz	
External Size(W*D*H)	690*370*280mm	
Package Size(W*D*H)	820*500*510mm	
Gross Weight	43kg	



BK-P3

Introduction:

Polarimeter is an instrument used to determine the rotation of a substance, and its working principle is based on the rotation of polarized light. By measuring the rotation angle of the sample to the polarized light, the concentration, content and purity of the substance can be analyzed and determined. Natural light through the polarizing mirror to produce plane polarized light, when the tube is filled with optical substances, polarized light through the material solution, the angle of polarized light will rotate to the left or right a certain angle. In order for the polarized light rotated at a certain angle to pass through the polarizer grating, the polarizer must be rotated at a certain angle so that the brightness can be seen at the eyepiece. This angle of rotation is the rotation of the solution of the substance to be measured.

Features:

- * Color touch screen.
- * Adopting the principle of photoelectric automatic balance measurement.
- * High sensitivity, stable and reliable readings, and no human error.
- * Automatic repetition-measurement for 6 times, and calculation of average value and means square root.

Technical Parameters:

Model	BK-P3
Light Source	LED + interference filter
Measuring Range	±45°(optical rotation) /±120°Z(sugar)
Wavelength	589nm
Min. Transmission	10%
Measuring Accuracy	±(0.01+measurement value*0.05%)°(optical rotation)
Repeatability	≤0.003°(optical rotation)
Test Mode	Optical rotation, specific rotation, concentration, sugar degree
Test Tube	200mm, 100mm
Interface	USB, RS232
Power Supply	AC 110/220V, 50/60Hz
External Size(W*D*H)	570*350*280mm
Package Size(W*D*H)	730*480*470mm
Gross Weight	36kg

Automatic Polarimeter



Introduction:
Polarimeter is an instrument for measuring the optical rotation of some substance. Through the measurement of optical rotation, it can analyze and determine the specific rotation, international sugar degree, concentration and purity of the substance, which is widely used in medicine, petroleum, food, chemical industry, flavor, fragrance, sugar and other industries as well as related universities and research institutes.

Features:

- * It can determine optical rotation, specific rotation, concentration, sugar degree.
- * LED cold light source instead of traditional sodium lamp and halogen tungsten lamp.
- * The measuring range is upgraded to±89°(Optical rotation), which improves the limitation of measuring samples.
- * Fully automated systematic control, easy to operate.
- * Wide color touch screen and innovative WINDOWS software interface make control and data reading more convenient, to meet the use of high-end users.

Technical Parameters:

Model		BK-P210
Light Source		LED cold light source + high precision interference filter
Wavelength		589.3nm
Measurement Method		Single, multiple, continuous measurement methods
Measurement Range		Optical Rotation±89.99°, sugar degree±257°
Optical Rotation	Least Count	0.001°
	Accuracy	±0.01°(45°≤ optical rotation ≤+45°) ±0.02°(Other ranges)
	Repeatability	0.002°
Temperature	Temp. Range	0-100°C
	Temp. Resolution	0.1°C
	Temp. Accuracy	±0.1°C
Display		7-inch TFT touch color screen
Standard Test Tube		200mm, 100mm(Regular)
Optional		Test tube, printer
Transmittance		0.01%
Data Storage		1000 groups
File Export		PDF and Excel
Interface		USB, RS232
Power Supply		AC 110/220V, 50/60Hz
Power		250W
External Size(W*D*H)		715*355*280mm
Package Size(W*D*H)		820*475*465mm
Net Weight		21.4kg
Gross Weight		30kg

Automatic Digital Polarimeter



Introduction:
Polarimeter is an instrument for measuring the optical rotation of some substance. Through the measurement of optical rotation, it can analyze and determine the specific rotation, international sugar degree, concentration and purity of the substance, which is widely used in medicine, petroleum, food, chemical industry, flavor, fragrance, sugar and other industries as well as related universities and research institutes.

Features:

- * Built-in Peltier temperature control to improve accuracy and stability.
- * It can determine optical rotation, specific rotation, concentration, sugar degree.
- * LED cold light source instead of traditional sodium lamp and halogen tungsten lamp.
- * Multi-level rights management, rights can be freely configured.
- * 8-inch touch color screen, humanized operation interface.
- * It meets 21 CFR requirements (electronic signature, data traceability, audit trail, data tamper prevention and other functions).
- * Fully comply with GLP, GMP certification standards.

Technical Parameters:

Model		BK-P610
Light Source		LED cold light source+high precision interference filter
Wavelength		589.3nm
Measurement Method		Single, multiple, continuous measurement methods
Measurement Range		Optical rotation±90°, sugar degree±259°Z, specific rotation±259°Z
Optical Rotation	Least Count	0.001°
	Accuracy	±0.004°
	Repeatability	0.002°
Temperature	Temp. Range	10°C~55°C(Peltier)
	Temp. Resolution	0.1°C
	Temp. Accuracy	±0.1°C
Display		8 inch TFT touch color screen
Standard Test Tube		200mm, 100mm(Regular), 100mm(Temp. control)
Optional		Test tube, printer
Transmittance		0.01%
Data Storage		32G
File Export		PDF and Excel
Interface		USB, RS232, VGA, Ethernet
Standard Accessory		Electronic signature, WIFI printing, automatic calibration, audit trial
Optional Accessory		Cloud services, MD5 code verification, custom formula, printer
Power Supply		AC 110/220V, 50/60Hz
Power		250W
External Size(W*D*H)		715*355*280mm
Package Size(W*D*H)		820*475*465mm
Net Weight		21.4kg
Gross Weight		30kg

BK-P2S Digital Automatic Polarimeter
 BK-P2B Automatic Polarimeter



- Features:**
- * Photoelectric test and microcomputer control.
 - * Storage of three times results and calculation of average values.
 - * Dark-colored sample can be measured.
 - * Photoelectric test and automatic servomechanism control.

Technical Parameters:

Model	BK-P2S	BK-P2B
Light Source	LED + interference filter	
Measuring Range	±45°(optical rotation) /±120°Z(sugar)	±45°(optical rotation)
Wavelength	589nm	
Readable Accuracy	0.001°(optical rotation) 0.01°Z(sugar)	0.002°(optical rotation)
Measuring Accuracy	±(0.01+measurement value*0.05%)°(optical rotation) ±(0.03+measurement value*0.05%)°Z(sugar)	±(0.01+measurement value*0.05%)° (optical rotation)
Repeatability	≤0.002°(optical rotation)	≤0.01°(optical rotation)
Test Mode	Optical rotation, sugar degree	Optical rotation
Test Tube	200mm, 100mm	
Sample Transmittance	1%	10%
Interface	RS232	
Power Supply	AC 110/220V, 50/60Hz	
External Size(W*D*H)	570*350*280mm	
Package Size(W*D*H)	730*480*470mm	
Gross Weight	36kg	

Disc Polarimeter



BK-P4



BK-P4L

- Features:**
- * Visual aim
 - * Manual measure
 - * Easy to operate

Technical Parameters:

Model	BK-P4	BK-P4L
Light Source	Sodium lamp	LED + interference filter
Wavelength	589nm	
Measuring Range	-180°~+180°	
Division Value	1°	
Venire Readable Accuracy	0.05°	
Magnifying Factor of the Magnifying Glass	4X	
Test Tube	200mm, 100mm	
Power Supply	AC 110/220V, 50/60Hz	
External Size(W*D*H)	440*110*230mm	
Package Size(W*D*H)	600*220*400mm	
Gross Weight	7kg	4.5kg

Optional Polarimeter Accessories

- * **Micro Tube**
With sample loading capacity less than 0.8ml and length of 50mm, suitable for BK-P2S, BK-P2B, BK-P1, BK-P2, BK-P3, BK-P4 polarimeter.
- * **Thermostatic Tube**
Dedicated to BK-P2 for the length of about 100mm, the sample loading is 2.5ml. And the non-corrosive type is optional to purchase.
- * **Standard Quartz Tube**
The only calibration equipment for standard polarimeter and optical Brix; with stable performance, less influence by the environment, and easy-to-use features, The loading of quartz tube includes±1°, ±5°, ±7°, ±34° and ±68°, for customer to choose accordingly.
Suitable for BK-P2S, BK-P2B, BK-P1, BK-P2, BK-P3, BK-P4 polarimeter.



Flash Point Tester
Open-Cup Flash Point Tester

Application:
It is applicable to all petroleum products with flash points above 79°C and below 400°C except fuel oils.

- Features:**
- BK-FP3536:**
- * It adopts special heating furnace to ensure the safety of test.
 - * The heating power is continuously adjustable. It can meet requirements of test.
 - * The instrument is fully self-contained complete. The operator can do determination as long as connecting with coal gas or other civil gas.
 - * With fast cooling function, it can improve test efficiency.
- BK-FP3536D:**
- * 8-inch IPS high-definition capacitive screen, the test data and parameters are displayed by curve in real time
 - * Automatic measurement of atmospheric pressure, automatic correction of flash point value.
 - * Equipped with Bluetooth interface. The user can query test data anytime.
 - * Electronic ignition, gas flame.
 - * Remote automatic upgrade to obtain the latest version, remote prediction, abnormal early warning, comprehensive evaluation and maintenance of instrument operation status.



BK-FP3536



BK-FP3536D

Technical Parameters:

Model	BK-FP3536	BK-FP3536D
Thermometer	-6°C~400°C. It is the same as thermometer ASTM 11C	
Ambient Temperature	15°C~35°C	
Relative Humidity	≤85%	
Consumption	≤650W	≤750W
Test Flame Applicator	It applies the test flash automatically.	
Heating Device	Furnace heating, no naked fire, explosion prevented. The power is adjustable from 0W to 600W	(1) Initial heating: (14~17) °C/min (2) It is (5-6) °C/min after reaching the preset flash point 20 °C
Igniting Device	(1) Ignition source: coal gas(or civil gas) (2) Nozzle aperture: about 0.8mm	Electric ignition Diameter of igniter: 0.7mm~0.8mm
Flash Point Determination	\	
		Range: Ambient to 400°C Accuracy: 0.1°C
Power Supply	AC 220V, 50Hz	
External Size(W*D*H)	350*290*350mm	510*320*330mm
Package Size(W*D*H)	650*450*420mm	690*500*610mm
Gross Weight	20kg	35kg

Closed-Cup Flash Point Tester

Application:
It is used to make determination of the closed cup flash point of the petroleum products.

- Features:**
- BK-FP261:**
- * The heating power is adjustable and shown visually by voltmeter.
 - * The structure is designed small and exquisite with stainless-steel table board.
- BK-FP261D:**
- * 8-inch IPS high-definition capacitive screen, the test data and parameters are displayed by curve in real time.
 - * Automatic measurement of atmospheric pressure, automatic correction of flash point value.
 - * Equipped with Bluetooth interface. The user can query test data anytime.
 - * Temperature rise, cover opening, ignition, detection and printing data are completed automatically, and the test arm rises and falls automatically.
 - * Remote automatic upgrade to obtain the latest version, remote prediction, abnormal early warning, comprehensive evaluation and maintenance of instrument operation status.
 - * Electronic ignition, gas flame, automatic air cooling at the end of the test.



BK-FP261



BK-FP261D

Technical Parameters:

Model	BK-FP261	BK-FP261D
Ambient Temperature	15~35°C	
Relative Humidity	≤85%	
Flash Point Determination	Mercury-in-glass thermometer. Specifications are as below: Scale -5°C~110°C, division 0.5°C Scale 20°C~150°C, division 1°C Scale 90°C~370°C, division 2°C	Range: Ambient to 230°C Repeatability: ≤3°C Reproducibility: ≤4°C Accuracy: 0.1°C
Oil Cup	Inner diameter: 50.7mm~50.8mm. Depth: 55.7mm~56.0mm The scribed line depth of capacity of testing oil: 33.9mm~34.3mm. Capacity of testing oil: about 70ml	
Stirring Rate	Procedure A: (90~120)RPM, Procedure B: (250±10)RPM	
Igniting Device	Igniting source: gas(or other civilian fuels, the same below)	Electric ignition. Diameter of igniter: 0.7mm~0.8mm
Heating Device	The heating power is continuously adjustable from 0 W to 600W.	
Heating Rate	(1~12)°C/min: Controllable and adjustable	Procedure A: (5~6)°C/min, Procedure B: (1~1.5)°C/min, Procedure C: (3±0.5)°C/min
Consumption	≤650W	≤600W
Power Supply	AC 220V, 50Hz	
External Size(W*D*H)	370*320*300mm	510*320*330mm
Package Size(W*D*H)	650*455*360mm	690*520*610mm
Gross Weight	18kg	35kg

Leakage Tester

Application:

Leakage tester is suitable for sealing test of bags, bottles, tubes, cans and boxes in food, pharmaceutical, medical equipment, daily chemicals, automobiles, electronic components, stationery and other industries. It can also be used to test the sealing performance of the specimens after the drop and pressure resistance tests.

Features:

- * Microcomputer control, test parameters can be set, automatic testing process.
- * Hold time, test pressure, and pressure replenishment ratio can all be pre-set for one-touch operation throughout the testing process.
- * Sealed chamber is made of high quality plexiglass tubing with 15mm thickness.
- * Automatic pressure release and purge upon completion of testing, saving operational time.
- * Imported pressure sensors paired with precision relays for rapid response and stable pressure control. Integrated calibration module supports multi-point calibration for third-party verification.
- * The instrument features an integrated compressed air filtration and pressure regulation system, with an external design for easy drainage and debris removal, ensuring the safe operation of internal components.
- * To ensure uninterrupted operation, the instrument utilizes a three-power-source independent supply mode: separate power supplies for the main controller, pressure reception module, and pressure control module.



Technical Parameters:

Model	BK-ST134
Vacuum Degree Range	-90~0kPa
Vacuum Accuracy Class	Class 0.5
Resolution	0.1kPa
Pressure Acquisition Rate	2ms
Pressure Replenishment Response Speed	5ms
Original Air Pressure	0.5~0.7MPa (User-supplied, optional)
Original Air Connection	Φ6 polyurethane pipes
Control Method	Microcomputer control, automatic test procedure
Display	LCD display
Vacuum Storage Time	0~6000s (Can be enlarged)
Data Output Mode	Thermosensitive or needle type printer (Optional)
Effective Size of Vacuum Chamber	Standard: Φ270*210mm (H) Optional: Φ360*585mm (H) and Φ460*330mm (H) Note: customization is available for other sizes
Power Supply	AC 220V, 50/60Hz; 110V, 50/60Hz (Optional)
Standard Accessories	Main machine, vacuum chamber, air tube, technical documents
Optional Accessories	Air compressor
External Size (W*D*H)	Main machine: 420*320*120mm Vacuum chamber: 300*350mm (H) (Standard)
Package Size (W*D*H)	Main machine: 530*430*250mm Vacuum chamber: 370*370*420mm
Net Weight	16kg
Gross Weight	23kg



BK-ST130



BK-ST132

Features:

- * The performance of pneumatic components is stable and reliable.
- * High quality plexiglass sealing barrel, effectively enhance the compressive strength.
- * Electronic pressure holding device, reduce mechanical wear.
- * PVC operation panel, LED display.
- * Built-in time display, convenient for users to record and observe the pressure holding time.
- * Automatic constant pressure air supply, automatic backblowing unloading pressure (Only for BK-ST132).
- * External compressed air filter device, easy to drain water and clean impurities (Only for BK-ST132).
- * Dual power supply independent power supply (Only for BK-ST132).

Technical Parameters:

Model	BK-ST130	BK-ST132
Vacuum Degree Range	-90~0kPa	
Vacuum Accuracy Class	Class 0.5	
Resolution	0.1kPa	
Original Air Pressure	0.5~0.7MPa (User-supplied, optional)	
Original Air Connection	Φ6 polyurethane pipes	
Control Method	Manual adjustment, automatic timing	Microcomputer control, automatic test
Display	LED display	
Power Mode	/	Compressed air
Vacuum Storage Time	0~9999h59min59s	0~9999s (Can be enlarged)
Effective Size of Vacuum Chamber	Standard: φ270*210mm (H) Optional: φ360*585mm (H), and φ460*330mm (H) Note: customization is available for other sizes	
Power Supply	AC 220V, 50/60Hz; 110V, 50/60Hz (Optional)	
Standard Accessories	Main machine, vacuum chamber, air tube, hand valve, power cord, technical documents	Main machine, vacuum chamber, pressure regulating filter, air tube, power cord, technical documents
Optional Accessories	Air compressor	
External Size (W*D*H)	Main machine: 420*320*120mm Vacuum chamber: 300*350mm (H) (Standard)	
Package Size (W*D*H)	Main machine: 530*430*250mm Vacuum chamber: 370*370*420mm	
Net Weight	16kg	
Gross Weight	23kg	

Soil&Plant&Seed Instruments Solution
Soil Auger Kits



Introduction:

Soil auger kits contains a complete set of soil borrowing accessories, which can be used to drill disturbed soil samples within 1-2 meters in soft soil areas or to drill 1-2 meters deep holes. Soil auger is one of the main tools for collecting soil samples. The reliability, ease of operation and mobility of the borrow drill can not only reduce the workload of soil investigation, improve the efficiency of soil borrowing, but also expand the adaptability of soil sampling.

Features:

- * The sampler is made of stainless steel, without pollution to sample.
- * Pedal type, more convenient, fast, reduce the labor intensity.
- * Take 15-20cm of the soil samples each time.
- * The material is hard and the shape is not easy to be bent and twisted.
- * The exterior of the soil sampler is marked with scale values, each scale is 100mm, which provides a reference for taking soil samples of different depths.
- * The soil sampling head, the connecting pipe and the handle are all connected by thread, which does not occupy the volume after disassembly, and is convenient for transportation.
- * When it is necessary to measure soil moisture data, it can be used as the connecting rod of the soil moisture sensor.
- * The depth of sampling is: 1m, 1.5m, 2m.

Technical Parameters:

Model	BK-SAK2
Function	Drill disturbed soil samples within 1~2 meters in soft soil areas or to drill 1~2 meters deep holes
Total Length	1-2m adjustable
Accessories	1 brush, 1 spanner, 1 tape on 3 meters, 1 scraper, 1 handle, 1 head, and 4 tubes
Package Size(W*D*H)	700*330*180mm
Gross weight	8kg

Soil Multi-parameter Tester

Application:

It is used to detect available nitrogen, available phosphorus, available potassium, organic matter, soil pH and soil salinity in soil, plant, chemical fertilizer.

Features:

- * LCD display.
- * Print testing date, sample number, sample items, sample contents, variety.
- * Large capacity storage (time, place, fertilizers), datum can be checked at any time.
- * Quickly test the N, P, K, organic matter, salinity, and pH in the soil, fertilizer and plants.
- * With the function of time display, can automatically record and save the time of tested sample.
- * Can set crop variety, crop yield, fertilizer variety, and automatically count the fertilizing amount.



Technical Parameters:

Model	BK-Y6A	BK-Y6PC	BK-Y7PC
Soil Nutrient	Stability	Absorbency of light drift < 0.003	
	Repeatability	Absorbency of light < 0.005	
	Linearity Errors	Red light for copper sulfate, and blue light for potassium dichromate < 3.0%	
	Sensitivity	Red light $\geq 4.5 \times 10^{-5}$, Blue light $\geq 3.17 \times 10^{-3}$	
	Wavelength Range	Red light 620±5nm; Blue light 440±5nm	
pH	Anti-Knocking Performance	Qualified	
	Testing Range	1~14	
Salinity	Error	±0.5%	
	Testing Range	0.01%~1.00%	
Error		±0.1%	
Function	Test N, P, K, organic matter, soil pH, soil salinity, with storage function, built-in the amount of nutrients needed for growth of 73 kinds of crops, can provide guidance for fertilizing amount according to needs, with printing function	On the basis of BK-Y6A, with a software, be able to connect to computer for data storage, tele-transmission and printing	Moisture: Moisture unit: $\%(m^3/m^3)$ Accuracy: ±2% Testing range: 0~100% On the basis of BK-Y6PC, but can measure soil moisture
Power Supply	AC110~240V, 50/60Hz		
Package Size(W*D*H)	700*400*250mm		
Gross Weight	10kg		

Multi-parameter Soil Meter



Application:

Handheld Multi-parameter Soil Meter can acquire different parameters with different sensors and the tested parameter would be air temperature, humidity, soil temperature, soil moisture. It is widely used in facilities agriculture, forestry, horticulture, animal husbandry and other fields, and fulfills to carry out conduct of automatically monitor, automatic control and intelligent management to the facilities for comprehensive agricultural ecological information.

Technical Parameters:

Model		BSM-01	BSM-02	BSM-03	BSM-05
Soil Moisture	Range	0~100%			
	Accuracy	±3%			
	Resolution	0.1%			
Soil Temperature	Range	/	-40℃~100℃		
	Accuracy	/	±3℃		
	Resolution	/	0.1℃		
Air Temperature	Range	/		-40℃~80℃	
	Accuracy	/		±0.4℃	
	Resolution	/		0.1℃	
Air Humidity	Range	/			0~100%RH
	Accuracy	/			±0.3%RH
	Resolution	/			0.1%RH
Dew Point	Range	/			-40℃~120℃
	Accuracy	/			±0.4℃
	Resolution	/			0.1℃
Storage Capacity		Almost up to 30,000 groups in handset, and standard equipped with 4G Micro SD. Data-collection interval: 5min~99hour	Flash storage your latest 30,000 records, with 4G SD card. 5s-90h continuously adjustable.		
Power Supply		8.4V lithium battery	8.4V Li-Ion battery		
Working Current		Stand-by power consumption 10mA, working power consumption according to the configuration.			
Package Size(mm)		415*340*155	390*420*200	390*420*200	430*390*260
Gross Weight(kg)		2.6	3.5	3.5	5.2

Digital Soil Water potential Meter




Features:

- * High accuracy and high resolution can test soil temperature and water potential at the same time.
- * Easy to operate, portable, flexible, can purchase one set with multi-probes.
- * Automatically get the peak data of water potential.
- * With time set, full scale set auto save function.
- * Record temperature, water potential, time and storage No at the same time.
- * Automatically turns off function.

Technical Parameters:

Model	BK-SWP2
Max Load	100kpa
Resolution	0.01kpa
Accuracy	±1FS
Soil Temperature Testing Range	-55℃~150℃
Temperature Accuracy	±0.5
Probe Quantities	3
Function	Can test both soil water potential index and soil temperature index
Power Supply	9V battery
Packing Size(W*D*H)	410*400*200mm
Gross Weight	4kg

Soil PH-Moisture Meter

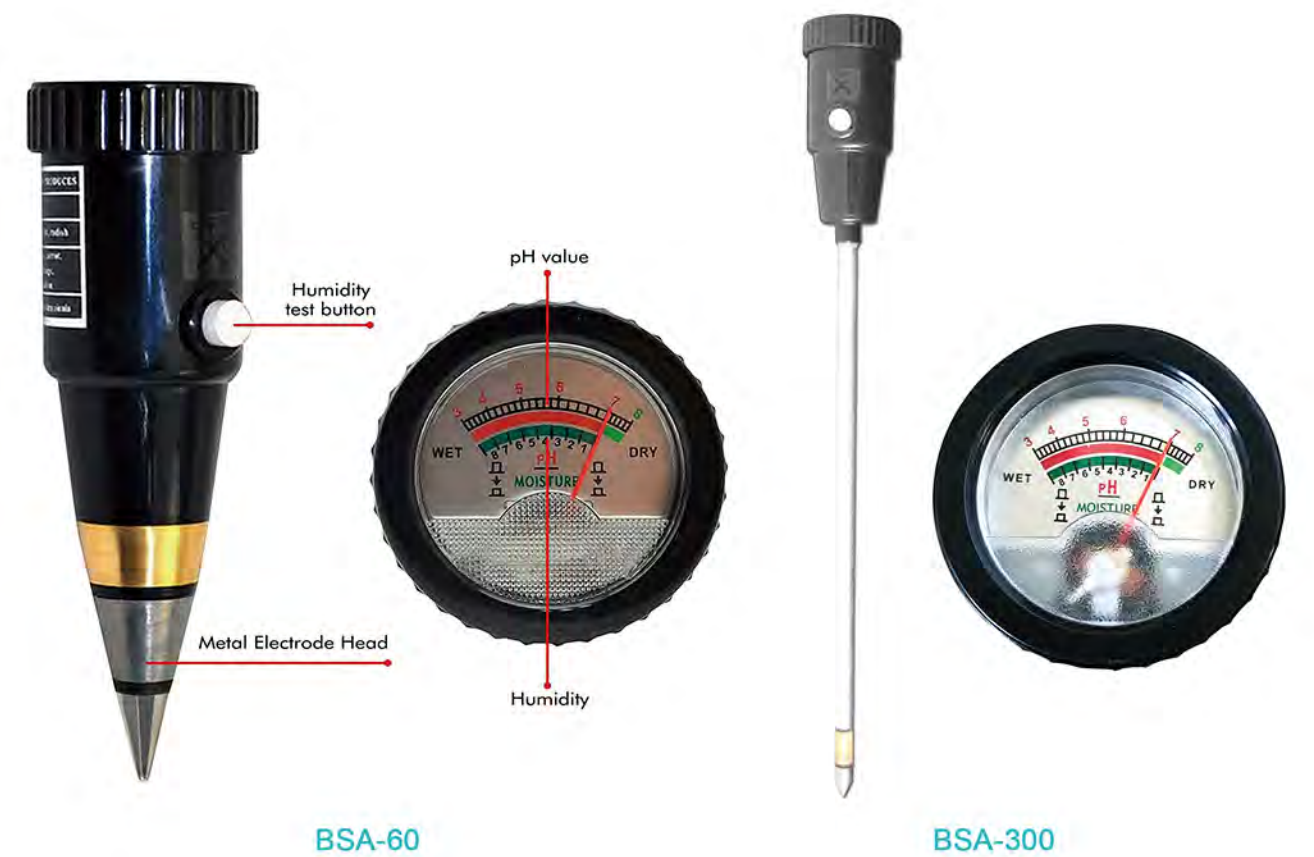

Introduction:

The soil PH is an important factor to limits the crops production and the quality. This instrument is simple and convenient, can directly insert the soil.

Technical Parameters:

Model	BSA-60	BSA-300
Function	Test depth: 6cm, suitable for surface soil acidic test	Test depth: 30cm, suitable in the depth soil acidic test
PH Range	3~8 PH	
PH Accuracy	±0.2PH	
Moisture Range	1 - 8%	
Moisture Accuracy	±1%	
Package Size(L*W*H)	220*150*150mm	590*150*135mm
Gross weight	0.5kg	

Soil Moisture, Temperature, And Salinity Recorder

Features:

Handset:

- * Small and exquisite, easy to carry and LCD display.
- * Collect settings: working unattended can be set to timing or manual collect data, recording and save data automatically.
- * Both AC and DC available, internal lithium battery: 8.4v 1500mAh, with function: charging protection, low voltage prompt. Also can be placed for a long time to record location.
- * Storage capacity: up to 30,000 groups in handset, and standard equipped with 4G Micro SD.
- * Data can be read on handset and also import to PC.
- * Power-off memory function: data already saved in SD card won't lose when lose power.
- * Probe to probe Consistency, handset can connect different kinds sensor by concentrator without influence on accuracy.
- * Auto detection: when sensor connects to handset, you can search different sensor.
- * Synchronous detection: 32 channels to detect same time as you combine.
- * RS485 wire communication, sensor communication cables could reach about 100 meters.
- * Low-power design, equipped with system monitor and protection function to avoid short circuit or interference from external.



Software:

- * Showing the curve trends of each parameter, Max, Min, and Avg. Zoom in and out function.
- * Coloring the overrun area function which is visual display.
- * Save the data in EXCEL format as a copy.
- * Be able to view period of parameter or graph, and can be printed.
- * All curvilinear coordinates can be set and move, which make analysis easier.

Technical Parameters:

Model	SMTS-3P
Function	Detect soil moisture, content temperature, and salinity same time
Soil Temperature	Unit: °C; Range: -40°C~100°C; Accuracy: ±0.5°C; Resolution: 0.1°C
Soil Moisture Content	Unit: %(m³); Range: 0~100%; Response time: ≤ 2s; Relative error: ≤3%
Soil Salinity	Range: 0~19.99ms/cm; Resolution: 0.01ms/cm; Sensors can be buried into soil.
Storage Capacity	Almost up to 30,000 groups in handset, and equipped with 4G Micro SD.
Data-Collection Interval	5min~99hour
Working Power Supply	Battery: 7.4V lithium battery; Power Adapter:100~240V 50/60Hz
Working Current	Stand-by power consumption 10mA, working power consumption according to the configuration.
Package Size(L*W*H) mm	450*420*140
Gross weight (kg)	4

Portable Soil Heavy Metal Analyzer



Features:

- * It can analyze 34 kinds of standard elements of K, Ca, Ti, V, Cr, Mn, Fe, Co, Ni, Cu, Zn, As, Se, Rb, Sr, Y, Zr, Nb, Mo, Ag, Cd, Sn, Sb, W, Re, Pd, Au, Hg, Pb, Bi, Cs, Ba, Th, U.
- * Small size, light weight, easy to carry, can be directly brought to the field for detection.
- * Can analyze various types of soil, field soil, sand, sludge, solid waste, soil, mud, etc.
- * High-speed processing chip, advanced algorithms and efficient software to make the instrument analysis faster.
- * Can analyze the soil directly without sample, the whole process only needs 80s.
- * Industrial resistance touch screen, compared to the capacitive screen has a better backlight performance, in the field of light is still clearly visible, while the field of special environment to avoid the risk of glove removal.
- * It works at -20℃ to 50 ℃, when the temperature humidity is beyond the scope of application, will automatically alarm.
- * Can be combined with the built-in GPS.

Technical Parameters:

Model	SHMA-B
Excitation Source	New integrated miniature X-ray tube, 6-50KV pressure/0-200uA tube flow with free adjustment, Ag target(standard)
Probe	With high sensitivity silicon drift detector, accuracy: <125 eV
Range	All element from Mg to U
Data	Built-in 32G memory for storing 300K spectral data and spectra.
Heat Dissipation	With a dedicated T-slot heat sink to improve the heat dissipation of the instrument without waiting for the detector to cool frequently
Safety	The package with Waterproof, dust-proof and shockproof
Supply Power	Battery: 7.2V lithium battery Power Adapter: 100~240V 50/60Hz
External Size(L*W*H)mm	254*79*280
Net Weight(kg)	1.6Kg(with battery)
Package Size(L*W*H)mm	400*130*360
Gross Weight(kg)	3

Portable Soil Tensiometer



Introduction:

Soil tensiometer is made up of pressure gauge, acrylic tube and ceramic probe, after the acrylic tube filled with water, ceramic probe gets wet and it can prevent outside air into the ceramic probe. When there is pressure difference between measured soil water potential and tensiometer, the water in tensiometer will infiltrate into the measured soil until the balance reached. So at that moment, the value shown on the pressure gauge is the measured soil water potential.

Technical Parameters:

Model	Length(mm)	Testing Range	Package Size(L*W*H)mm	Gross weight(kg)
BST-15	150	0~1 Bar (1 Bar = 100 Kpa)	370*225*80	0.5
BST-30	300		440*150*100	1.0
BST-45	450		600*150*70	1.0
BST-60	600		700*150*70	1.2
BST-90	900		1000*210*100	1.5
BST-120	1200		1335*210*100	1.5

* Length can be made as customized. (Standard length is the length of transparent polycarbonate tube in the middle of tension meter tube)

Soil Respiration Meter



Introduction:

Soil respiration measurement is the main way for carbon to return to the atmosphere from terrestrial ecosystem, and it is also the characterization of life activities in soil. Accurate measurement of its release is the key to evaluate the biological process in ecosystem; By monitoring soil respiration and its related parameters, the response of root box soil microorganisms to climate change can be estimated. Soil CO₂ flux is affected by many complex physical and biological processes in time and space. Long-term, continuous and accurate measurement of soil carbon flux is of great significance to the study of terrestrial ecosystem carbon flux. The soil respiration meter can simultaneously display the CO₂ concentration, soil temperature, photosynthetic effective radiation intensity, flow, air temperature and humidity of the respiration chamber.

Features:

- * Intuitive display: Chinese LCD 160*256 dot matrix, simple operation and clear interface.
- * Data storage: Large Capacity SD card is used to store data, which has large data storage capacity and convenient export.
- * Data acquisition: CO₂ concentration, soil temperature, air temperature, air humidity, photosynthetic effective radiation intensity, gas flow and other indicators can be collected at the same time. The stability, accuracy, attention and time response of the measurement are very good.
- * Easy to use: small size, light weight, portable, single person operation, arbitrary movement, clear gas circuit and circuit connection.
- * Wide application: users can choose breathing chambers with different volumes or other purpose breathing chambers, which can be widely used for the determination of respiration of soil, fruits and vegetables, seeds, plants and so on.
- * Convenient power supply: it is equipped with standardized maintenance free lithium battery, which can be used for more than 10 hours at a time. It can also be powered by AC and DC.
- * Instrument protection: microelectronic flowmeter is adopted, with the function of prompt protection for gas path blockage.

Technical Parameters:

Model	SRM-3051T
Carbon Dioxide Detection	Infrared carbon dioxide detection module Measurement range: 0~5000ppm Linearity: ≤± 1% F.S Repeatability: ≤± 1% Response time: ≤ 15s Zero drift: ≤± 2% f.s/24h End drift: ≤± 2% f.s/24h
Soil Temperature Detection	Micro fast response PT100 platinum resistance Measurement range: 0~60 °C Resolution: 0.1 °C, Accuracy: ± 0.3 °C
Air Temperature Detection	Inlet temperature detection module Measurement range: - 20~95 °C Resolution: 0.1 °C Accuracy: ± 0.2 °C
Air Humidity Detection	Inlet humidity detection module Measurement range: 0~100% Resolution: 0.1% Accuracy: ± 1.8%
Light Detection	Silicon photocell with correction filter, response spectrum 400nm-700nm Measurement range: 0-3000umol / m ² / s ⁻¹ Resolution: 1umol / m ² / s ⁻¹ Accuracy: ± 5% umol / m ² / S ⁻¹
Flow Detection	Microelectronic flowmeter Measurement range: 0~1.5l/m Resolution: 0.01l/min Accuracy: ± 2%
Soil Respirator	Volume 1.0L.
Storage	Storage mode: 2GB memory card storage Storage format: TXT document
Working Power Supply	Battery: 8.4V lithium battery; Power Adapter:100~240V 50/60Hz
Package Size(L*W*H) mm	550*350*250
Gross Weight (kg)	8

Non-nuclear Soil Density Meter



Applications:

It is used for the measurement of wet density and moisture content of compacted materials in the following areas: excavation and backfill construction; underground passages, basements and foundations; backfilling and ditches, garbage; subgrade foundations and trench backfilling. It is mainly suitable for clay and non-cohesive soils, and can also be used for lime or cement improved soils, gravel soils and other soils.

Features:

- * Fast, reliable, lightweight, robust, accurate, and reproducible real-time readings.
- * Adopt high-quality and reliable point-to-point RF technology.
- * 2-3 minutes to display the measurement results.
- * Using digital DDS frequency synthesis technology, no calibration is required, and there will be no data drift during use.

Technical Parameters:

Model	BK-NDM4
Wet Density Accuracy	0-2% of standard tests
Water Content Accuracy	0-3% of standard tests
Display	5 inches touch screen
Detection Depth	Standard 150mm, maximum depth 300mm (need to customize steel needle)
Storage	50000 pcs data
USB Port	Yes
Power Supply	12V, 2600mAh lithium rechargeable battery, continuous work for 20 hours
Packing Size	190*160*70mm
Gross Weight	8.5kg

Ground Bearing Capacity Detector



Applications:

It is also called Micro Penetrator. It is mainly used to test the compactness and uniformity of large-area filling engineering after rolling. Such as highways, roads and bridges, municipal drainage, oil pipelines, water conservancy guards, industrial and civil construction. It is characterized by lightness, flexibility and speed, and can track rolling site monitoring anytime, anywhere.

Technical Parameters:

Model	BK-GBD12
Measuring Depth	0-30cm
Precision	≤0.5%
Storage	1000 groups of data
Configuration	Probe rod: 3 pcs Probe: 2 pcs Test data sheet: 1 set Instrument aluminum alloy box: 1 pc Computer data processing software: 1 set
Packing Size	415*370*170mm
Gross Weight	6kg

Soil Relative Density Meter



Applications:

- * Airport runway.
- * Excavation and backfill construction.
- * Channel.
- * Road and railway foundation construction.
- * Construction of public facilities.
- * The construction of the dam.
- * Yard cover construction.
- * Building foundation.

Technical Parameters:

Model	BK-SRM1
Metal Volume 1	250ml, diameter 5cm, height 12.7cm
Metal Volume 2	1000ml, diameter 10cm, height 12.75cm
Hammer	Mass 1.25KG, diameter 2cm, 10cm, drop height 15cm
Long Neck Funnel	Neck diameter:1.2cm
Conical Plug	Diameter:1.5cm
Sand Surface Smoother	Cruciform
Packing Size	480*230*160mm
Gross Weight	11kg

Soil Compaction Tester



Features:

- * In the data viewing mode, you can view the data on the host or import it into the computer for viewing and analysis.
- * The data that has been saved in the host will not be lost due to unexpected power failure.
- * Display each sensor parameter and process curve trend, maximum value, minimum value, average value, zoom in, zoom out, etc.
- * The measurement data of each sensor has been saved in EXCEL format. The data report and curve graph can be viewed by time period and can be printed by computer. The curve coordinates can be moved and the historical data can be clearly analyzed.
- * It has the function of distinguishing the color of the out-of-limit area, and the display is intuitive and convenient.

Technical Parameters:

Model	SCM-3
Recording Time Interval	5 minutes to 99 hours
Longitude	0-180°
Latitude	0-90°
Measuring Range	0~10000kPa, 0~100Kg/cm², 0~1000N/cm²
Measuring Accuracy	±0.5%FS
Measuring Depth	375mm
Working Power Supply	7.4V large capacity lithium battery
Packing Size	600*200*100mm
Gross Weight	3kg

Soil Compaction Meter

Features:

Software:

- * Showing the curve trends of each parameter, Max, Min, and Avg. Zoom in and out function.
- * Coloring the overrun area function which is visual display.
- * Save the data in EXCEL format as a copy.
- * Be able to view period of parameter or graph, and can be printed.
- * All curvilinear coordinates can be set and move, which make analysis easier.

Handset:

- * Small and exquisite, easy to carry and LCD display.
- * Collect settings: working unattended can be set to timing or manual collect data, recording and save data automatically.
- * Both AC and DC available, internal lithium battery: 8.4v 1500mAh, with function: charging protection, low voltage prompt.
Also can be placed for a long time to record location.
- * Storage capacity: up to 30,000 groups in handset, and standard equipped with 4G Micro SD.
- * Data can be read on handset and also import to PC.
- * Power-off memory function: data already saved in SD card won't lose when lose power.
- * Probe to probe Consistency, handset can connect different kinds sensor by concentrator without influence on accuracy.
- * Low-power design, equipped with system monitor and protection function to avoid short circuit or interference from external.



Technical Parameters:

Model	SCM-750-II
Function	General type, display soil compaction(KPa, kg/cm², N/cm²)directly, with data saving function
Range	0~10,000KPa; 0~100kg/cm²; 0~1,000N/cm² (switchable)
Depth	0~375mm (measuring rod is 400mm)
Accuracy	±0.5‰ FS
Position Accuracy	Three decimal ±0.05(≤50m)
Storage Capacity	Almost up to 30,000 groups in handset, and equipped with 4G Micro SD
Data-Collection Interval	5min~99hour
Working Power Supply	Battery: 8.4V lithium battery; Power Adapter:100~240V 50/60Hz
Working Current	Stand-by power consumption 10mA, working power consumption according to the configuration
Package Size(L*W*H)	400*200*200mm
Gross Weight	3kg

Soil Conductivity Meter

Application:

It is widely used in soil moisture detection, dry farming, water-saving irrigation, precision agriculture, forestry, geological exploration, plant cultivation, water conservancy, environmental protection and other fields.



Technical Parameters:

Model	BK-SCM1
Range	0~23ms/cm
Accuracy	±2%
Resolution	0.01mS/cm
Temperature Compensation	0-50 °C
Power Supply	110-240V, 50/60Hz
Packing Size	390*200*200mm
Gross Weight	2kg

Soil Permeameter

Application:

This instrument is used to measure the permeability of clayey soil under variable water head.



Technical Parameters:

Model	BK-SPM55
Sample Size	φ61.8mm, height: 40mm
Product Size	φ118mm (except the nozzle) height about 155mm
Net Weight	3.5kg
Packing Size	320*220*280mm
Gross Weight	5kg

Soil Bulk Density Tester

Application:

The soil bulk density meter is suitable for on-site determination of the density of coarse-grained soil. It has a chassis, a sanding funnel, a bulk density bottle, and the valve is structurally strong and durable, and is made of stainless steel. The volume of the sand bottle is strictly calculated and the calibration error of the electronic balance is within 5g, which provides reliable data for the experiment. The sanding funnel is 135mm high and the volume of the sand bottle is 4L. The product also has a series of products (plastic, Iron sheet) is available.

Principle:

Using the ring cutter method, the guide rod and the drop hammer are used to apply natural pressure to the ring cutter without affecting the original structure of the soil.



Technical Parameters:

Model	BK-SDT4
Configuration	2 ring cutters, 1 orientation cylinder, 1 guide rod, 1 drop hammer, 2 knobs
Packing Size	410*310*250mm
Gross Weight	15kg

Soil Aggregate Structure Meter

Introduction:

Aggregate structure is the basis of fertility. The relationship between aggregate structure and soil fertility is mainly manifested in regulating the contradiction between soil moisture and air; coordinating the contradiction between soil nutrient consumption and accumulation; stabilizing soil temperature; improving soil tillage, which is conducive to the extension of crop root system.

Features:

- * Stable performance and low failure rate.
- * Stable No noise, adjustable speed.
- * Stable With the function of timing setting, the running time of tube display is concise and clear.
- * Stable With emergency stop switch, it is convenient to cut off power in time when abnormal phenomena occur in the test and stop working.

Technical Parameters:

Model	SAS-100
Oscillation Frequency	4-45 times / min
Operation Mode	Vertical movement, stroke 50mm
Timing Range	0-60 minutes
Speed	1350 rpm
Standard Configuration	Sieve: Size: 20cm, height: 5cm Specification: 10mm, 7mm, 5mm, 3mm, 2mm, 1mm, 0.5mm, 0.25mm Material: stainless steel Oscillating rack: 3 supports simultaneous determination of 3 samples
Power Supply	220V±20% 50/60Hz, 120W
External Size(L*W*H) mm	512*512*760
Package Size(L*W*H) mm	610*590*950
Gross Weight (kg)	53



Leaf Thickness Gauge

Introduction:

The leaf thickness Gauge is mainly used to measure the leaf thickness of plants, so as to reflect the growth and nutritional status of plants through the measurement data.



Technical Parameters:

Model	LTG-1
Measuring Range	0~6mm
Resolution	0.01mm
Accuracy	0.015mm
Contact Area	Φ10 mm
Reader	Pointer
Net Weight	1kg

Plant Water Potential Analyzer



Features:

- * MPa and Bar are two measuring units for choice.
- * Powerful storage function, can store 4000 records.
- * Delete all measurement data with one click.
- * Upload the computer through the USB cable.
- * The data can be viewed in the form of reports, and you can choose the period of query.
- * Store the record data in EXCEL format backup and save, convenient call later.

Technical Parameters:

Model	PWP-II
Measuring Range	0~3.5Mpa
Accuracy	0.01Mpa
Measuring Mode	Automatic and manual, one-button switch
Display	LCD
Battery	12V/2.5AH lithium battery with clock function
Power Supply	220V 50/60Hz
External Size	630*400*310mm, 560*400*280mm
Package Size	685*445*360mm, 610*440*340mm
Net Weight	28kg
Gross Weight	32.3kg

Root Scanner



Introduction:
 Root analysis system is based on image recognition technology, it is professionally used for root analysis of plants after washing the roots in vitro. It has the characteristics of convenience, efficiency and high accuracy, which can improve the work efficiency of practitioners, reduce labor costs.

Features:

- * Clear interface design, modular function design.
- * User learning cost is lower, operation is more convenient and smoother.
- * The analysis results are more accurate.

Technical Parameters:

Model	RS-A
Power Supply	100~240V, 50/60Hz
Optional Accessory	computer
Package Size	805*235*395mm
Net Weight	8kg
Gross Weight	9.7kg

Overall Analysis Parameter:

Model	RS-A	
Root Tip	Number: the total number of root tips, equal to the number of termination points	
	Range	0~1000
	Accuracy	error <5%
Root System	Length: total root system length, including main root and secondary roots	
	Range	0~10000mm
	Accuracy	error <3.65%
	Average Diameter: the average diameter of the root system	
	Range	0~20mm
	Accuracy	error <0.04%
	Projected Area: the projected area of the root system as a whole	
	Range	0~200000mm ²
	Accuracy	error <4.02%
	Surface Area: the overall surface area	
	Range	0~1000000mm ²
	Accuracy	error <3.75%
	Volume: overall volume	
	Range	0~2000000000mm ³
	Accuracy	error <3.82%

Leaf Temperature Gap Meter



Features:

- * Small size, easy to carry.
- * LCD display, friendly man-machine interface.
- * Reasonable mechanism, accurate measurement, simple use, good stability and maintenance free.
- * Perfect power management scheme, it will shut down automatically when there is no key operation for a long time.

Technical Parameters:

Model	LTG-A
Measuring Range	0℃~60℃
Resolution	0.1 ℃
Reaction Time	< 3 seconds
Measurement Error	±0.5℃
Linearity	Maximum deviation of 1%
Storage	SD card storage(2GB)
Battery	4.2V rechargeable lithium battery
Power Supply	110V~240V, 50/60Hz
Working Temp	0℃~50℃; 0%~85% relative humidity, no condensation
Package Size	270*210*140mm
Net Weight	0.5kg
Gross Weight	1kg

Portable Leaf Area Meter

Application:

Portable leaf area meter is mainly used for determination plant leaf, is a portable instrument can work in the field. The leaf area and related parameters of the leaves can be measured accurately, quickly and without damage, the area of the plant leaves and other flakes can also be measured. Widely used in agriculture, meteorology, forestry and other departments.



LCD Display
Push-button Type LAM-A/LAM-B



Touch-screen Type LAM-B

Technical Parameters:

Model	LAM-A	LAM-B	
Screen	Button screen	Button screen	Touch screen
Unit	Millimeter, Square Centimeter	Millimeter, Square Centimeter	Millimeter, Square Centimeter, Square Millimeter
Precision	±2%		
Resolution	0.01cm²		
Measuring Length	≤1000mm	≤1000mm	≤3000mm
Measuring Width	≤160mm	≤160mm	≤210mm
Thickness	≤8mm	≤8mm	≤6.5mm
Data Capacity	≥1000Groups	≥1000Groups	≥100000Groups
Packing Size(W*D*H)	390*230*220mm	580*250*200mm	600*250*200mm
Gross Weight	2kg	2.8kg	3kg

Features:

- * Easy to operate. With Micro-computer technology, LCD display.
- * Test many kinds of data, such as leaf area, average area, length of leaf, width of leaf, perimeter and ratio of length and width.
- * USB link with computer by software, you can put the data into computer, and convert data to excel format and print.
(Only for LAM-B touch screen)

Leaf Area Meter

Application:

The Leaf Area Meter is a portable instrument that is easy to use and can work in the field. The leaf area and related parameters of the blade can be measured accurately, quickly and without damage, and the area of the picked plant leaves and other sheet-like objects can also be measured. Widely used in agriculture, meteorology, forestry and other departments.

Features:

- * Using microcomputer technology, LCD large liquid crystal display.
- * One-time measurement of large blade area (1000*155mm).
- * 10,000 sets of data (leaf area, leaf length, leaf width) can be stored.

Technical Parameters:

Model	LA-B2
Area Unit	cm²
Resolution	0.01cm²
Measurement Error	<5%
Measuring Width	0~150mm
Measuring Length	0~1000mm
Data Capacity	0 to 10000 groups
Power Supply	4 section 5 batteries
Packing Size(W*D*H)	400*200*150mm
Gross Weight	2kg



Portable Chlorophyll Meter



Application:

Portable Chlorophyll Meter can measure different parameters, such as Chlorophyll. It helps to improve the use of nitrogen fertilizer, and provides reliable soil and crop information for precision agriculture. It can mainly be applied in fields such as agricultural production and ecological monitoring.

Technical Parameters:

Model	PCM-A	PCM-B2
Measurement Indexes	Chlorophyll	Chlorophyll, leaf temperature, nitrogen
Measuring Area	10mm	
Measuring Mode	2-wavelength concentration difference of optical methods	
Sensors	Silicon semiconductor photodiode	
Display Mode	Measuring value: 3 digits liquid crystal display Measuring times: 2 digits liquid crystal display	
Min Measuring Interval	<2s	<5s
Chlorophyll Range	0.0~99.9SPAD	0.0~99.9SPAD
Chlorophyll Accuracy	±1.0SPAD	±1SPAD
Nitrogen Range	/	Full range
Nitrogen Accuracy	/	±5%
Leaf Temperature Range	/	0~60°C
Leaf Temperature Accuracy	/	±1°C
Repeat	±0.3SPAD	
Operating and Storage Environment	0°C~50°C, 85% relative humidity	
Power	2200mAh	
Battery Life	Can maintain more than 20000 operations	
Data Capacity	2GB, SD card	
Packing List(W*D*H)	300*250*150mm	
Gross Weight	1.4kg	1.5kg

Portable Chlorophyll Meter



Application:

Chlorophyll Meter measures leaf chlorophyll content and temperature non-destructively. It assesses plant photosynthesis efficiency and health, aiding in plant growth understanding and cultivation improvement. It's used in agriculture and forestry for plant physiology studies and production guidance.

Features:

- * Through multi-point and multi-stage calibration technology, ensure the accuracy and reliability of each measurement.
- * Equipped with multiple layers of anti-interference design to block external light and temperature, ensuring stable and accurate data collection.
- * Real time display of the average, highest, and lowest values of recent measurement data, ensuring that data changes are clear at a glance.
- * When the instrument has 20% battery left, a low battery reminder will be displayed.
- * An exclusive chlorophyll application that provides convenient data viewing, analysis, and management functions, making it easy for users to view and export measurement results anytime, anywhere.

Technical Parameters:

Model	CM-B
Display	1.3-inch OLED display screen
Chlorophyll Measurement Range	0.0~99.9SPAD
Chlorophyll Measurement Accuracy	±1.0 SPAD(SPAD values range from 0 to 50 at room temperature)
Leaf Surface Temp. Measurement Range	10~99.9℃
Leaf Surface Temp. Measurement Accuracy	±0.5℃
Measure Area	2*2mm
Measurement Time Interval	2 seconds
Data Transmission	Bluetooth
Power Supply	1.5V*2 dry batteries, capable of continuous measurement up to 5000 times
External Size(W*D*H)	165*83*50.5mm
Package Size(W*D*H)	340*300*150mm
Net Weight	0.2kg
Gross Weight	2kg

Plant Canopy Analyzer



Introduction:

Plant canopy analyzer is widely applied for farming production and agricultural research, canopy energy resource investigation, measure the light interception among plant canopy, and research the relation between plant growth and development, production quality and light utilization.

Features:

- * Integration design, it includes LCD, operation buttons, SD card plug and measure probe.
- * Menu operation is easy, small size and portable.
- * Large store capacity. Convenient data management.
- * Low power dissipation with reasonable power management with automatically shut down and restart action.
- * Manual and auto measure method are available.

Technical Parameters:

Model	PCA-1000
Measuring Range	0~2700μmol m ² /s
Resolution	1μmol m ² /s
Response Time	10μs
Auto-Collecting Interval	1~99 min
Auto-Collecting Times	1~99 times
Store Capacity	2GB(SD card)
Meter Length	750mm
Probe Length	500mm
Qty of Sensors	25pcs(standard)
Power Supply	2*AA batteries
Working Temp	0~60℃
Working Humidity	100%RH
Package Size	810*210*160mm
Net/Gross Weight	2/3kg

Plant Photosynthesis Meter



Application:

The Plant Photosynthesis Meter applies for measuring Photosynthesis rate of crops, fruits and vegetables, grass etc.

Features:

- * LCD widescreen display.
- * Use - friendly: small in size, light - weight, portable, single - person operation, clear connection of gas circuit and electrical circuit, the leaf chamber open and lock automatically.
- * Excellent performance: high stability, accuracy, repeatability, and good time response. It is able to measure simultaneously Pn, CO₂, PAR, T etc.
- * Widely application: equip different type leaf chamber, it can widely apply for field crop, fruits and vegetables, forest and wood, grass etc. equip standard maintain - free Li - Ion, AC/DC are available, RS232 available.

Technical Parameters:

Model		PPM-C
CO ₂	Measure Range	0~1500ppm
	Accuracy	3%ppm
Leaf Temperature	Measure Range	0~50℃
	Accuracy	±0.5℃
Air Temperature	Measure Range	0~50℃
	Accuracy	±0.5℃
PAR	Measure Range	0~2500μmol·m ⁻² ·s ⁻¹
	Accuracy	<5μmol·m ⁻² ·s ⁻¹
RH(chamber humidity)	Measure Range	0~100%
	Accuracy	2%
Power Supply		110~220V, 50/60Hz
Packing Size(W*D*H)		560*400*250mm
Gross Weight		10kg

Plant Nutrition Analyzer



Application:

The plant nutrient analyzer can perform non-destructive live detection of plants without affecting plant growth. It can measure leaf temperature, nitrogen content, relative chlorophyll content, and leaf humidity. Widely used in agricultural and forestry related scientific research units and universities to study plant physiology and guide agricultural production.

Features:

- * Through multi-point and multi-stage calibration technology, ensure the accuracy and reliability of each measurement.
- * The structure has multiple anti-interference layers that block external light and temperature, ensuring stable and accurate data acquisition.
- * It can display the average, highest, and lowest values of the last 30 sets of measurement data.
- * Through Bluetooth, it connects conveniently with a mobile app, enables real-time data synchronization, provides unlimited storage for measurement data
- * When the instrument has 20% battery left, a low battery reminder will be displayed.

Technical Parameters:

Model	PNA-4
Display	1.3-inch OLED display screen
Chlorophyll Measurement Range	0.0~99.9SPAD
Chlorophyll Measurement Accuracy	±1.0 SPAD(SPAD values range from 0 to 50 at room temperature)
Leaf Surface Temp. Measurement Range	10~99.9℃
Leaf Surface Temp. Measurement Accuracy	±0.5℃
Leaf Surface Humidity Measurement Range	0.0~99.9%RH
Leaf Surface Humidity Measurement Accuracy	±5%
Nitrogen Content Measurement Range	0.0~99.9mg/g
Nitrogen Content Measurement Accuracy	±5%
Measure Area	2*2mm
Maximum Measured Thickness	1.2mm
Sample Insertion Depth	Maximum 12mm
Measurement Time Interval	2 seconds
Data Transmission	Bluetooth
Power Supply	1.5V*2 dry batteries, capable of continuous measurement up to 5000 times
Data Storage Capacity	Host 2000 pieces of data, unlimited storage in the instrument APP
External Size(W*D*H)	165*83*50.5mm
Package Size(W*D*H)	340*300*150mm
Net Weight	0.2kg
Gross Weight	2kg

Plant Culm-strength Meter



Features:

- * High precision, high resolution, easy operation, easy to carry.
- * Automatically save test pressure, time and test serial number.

Technical Parameters:

Model	PCM-1A	PCM-1B
Max Load	50N	500N
Load Accuracy	±0.5%	
Resolution	0.1N	
Culm Width Range	0~100mm	
Unit	N, kg	
Output Interface	RS232	
Power	Chargeable battery, Charger(charge voltage: 100V-240V)	
External Size(W*D*H)	295*130*36mm	
Net Weight	0.6kg	
Packing Size(W*D*H)	330*90*300mm	
Gross Weight	1.5kg	

Plant Transpiration Rate Meter



Features:

- Multiple parameters tested: test air temperature, leaf temperature, air humidity, PAR etc at same time,and count the transpiration rate and Stomatal conductance accordingly.
- Small size, light, portable and one - person operation.
- Widely application: with different leaf chamber, the meter is able to be used in field crops, fruit and vegetables, hay etc which are in different shape.

Technical Parameters:

Model	PTRM-1000	
Air Temperature	Range	0~50℃
	Resolution	0.1℃
	Error	±0.2℃
Leaf Temperature	Range	0~50℃
	Resolution	0.1℃
	Error	±0.2℃
Air Humidity	Range	0~100%
	Resolution	0.1%
	Error	≤±3%
PAR	Range	0~2500μmolm·m²·s
	Accuracy	<5μmolm·m²·s
Size of Leaf Chamber	55*20mm, customized available	
Work Environment	Temperature: 20℃~50℃; Relative humidity: 0-100%(without condensation of moisture)	
Power	DC7.4V Li - ion Battery, 7-9hours continuously working	
Display	320×160 lattice	
External Size(W*D*H)	260*260*130mm	
Net Weight	3.25kg	
Packing Size(W*D*H)	520*200*350mm	
Gross Weight	12kg	

Fruit and Vegetable Respirator



Introduction:

Fruit and vegetable respirator is specially used to test and research fruit and vegetables under the conditions of normal temperature, cold storage, supermarket freezers and so on. It can choose different respiratory chambers according to the size of fruit and vegetables which can speed up the balance and measuring time. It has the characteristics of multifunction, high precision, fast, efficiency and convenience.

Features:

- * High precision, accurate measurement.
- * Uniform temperature control.
- * Temperature and humidity display and directly getting concentration values.
- * Can measure constantly.

Technical Parameters:

Model		BK-FVR3051
CO ₂	Min Measuring Range	0~1000ppm
	Linearity	≤±2%F·S
	Repeatability	≤±1%
	Response Time	≤15s
	Zero Shift	≤±2%F·S/24h
	Destination Shift	≤±2%F·S/24h
O ₂	Measuring Range	0~25%
	Linearity	≤±2%F·S
	Repeatability	≤±1%
	Response Time	30s
	Zero Shift	≤±2%F·S/24h
	Destination Shift	≤±2%F·S/24h
Temp	Measuring Range	0~50°C
	Resolution	0.1°C
	Accuracy	±0.2°C
Humidity	Measuring Range	0~100%
	Resolution	0.1%
	Accuracy	±0.2%F·S
Pre-Heating Time		2 hours
Power Supply		110~240V, 50/60Hz
Respiratory Chamber		Standard:Φ120*170mm, Φ60*90mm, Φ40*80mm
External Size		320*483*133mm
Package Size		505*190*340mm
Net/Gross Weight		9/11kg



Introduction:

Fruit and Vegetable Respirometer measures respiratory intensity of fruits and vegetables under storage conditions (ambient, cold storage, controlled atmosphere, etc.). It offers selectable respiration chamber volumes (sizing to samples) for faster equilibration, and simultaneous display of CO₂/O₂ concentrations, temperature, and humidity. High-precision, efficient, and user-friendly, it suits food, horticulture, trade, and research institutions.

Features:

- * 3.5" TFT true-color LCD: intuitive operation, clear display.
- * 2G memory: large data storage, easy export.
- * Automated result calculation; USB data export (no extra software needed).
- * USB connectivity to PC for data/results export (Excel format), with chart/curve generation.
- * Micro gas flow meter with adjustable flow rates.

Technical Parameters:

Model		BK-FVR3080A
CO ₂	Detection Principle	Infrared
	Measuring Range	0~5000ppm
	Resolution	1ppm
	Linearity	≤±1%F·S
	Repeatability	≤±1%
	Response Time	≤15s
	Zero Shift	≤±2%F·S/24h
	Destination Shift	≤±2%F·S/24h
O ₂	Detection Principle	Electrochemical
	Measuring Range	0~95%
	Resolution	0.01%
	Linearity	≤±2%F·S
	Repeatability	≤±1%
	Response Time	30s
	Zero Shift	≤±2%F·S/24h
	Destination Shift	≤±2%F·S/24h
Temp	Measuring Range	-20~95°C
	Resolution	0.1°C
	Accuracy	±0.2°C
Humidity	Measuring Range	0~85%
	Resolution	0.1%
	Accuracy	±0.2%F·S
Pre-Heating Time		15min
Power Supply		AC220V,50/60Hz(Standard); AC110V,60Hz(Optional,external transformer)
Respiratory Chamber		Standard:Φ120*180mm(2L),Φ60*89mm(0.25L),Φ40*80mm(0.1L)
External Size(W*D*H)		260*260*130mm
Package Size(W*D*H)		550*400*250mm
Net Weight		3.25kg
Gross Weight		10kg

Digital Fruit Sclerometer



Features:

- * Can store 896 peaks of data. The LED shows the peaks of data, and get rid of the data.
- * Can output data; analyze the data by connected with computer.
- * With digital peak value holding function, hold the peak value for 2 seconds and the peak value will be automatically can celled.
- * Green environmental - protective: If you do not operate the machine after 10 seconds, the machine will be shut down automatically.

Technical Parameters:

Model	BK-DFS4	
Range	0.2-15 Kg/cm ² (×10 ⁵ Pa)	0.4 - 30 Kg/cm ² (×10 ⁵ Pa)
Division Value	0.01 Kg/cm ²	0.01 Kg/cm ²
Pressure Head Diameter	1# φ11.1mm	2# φ7.9mm
Precision	±1%	
Display Mode	Digital	
Net Weight	About 0.6KG	
Insertion Depth of Pressure Head	10mm	
Power Supply	220V 50Hz, 110V 60Hz	
Packing Size	350*200*100mm	
Gross Weight	1.6kg	

Multi-rice Wheat Thresher



Features:

- * Easy to thresh and with small loss.
- * Portable moving and easy cleaning.
- * Surface of the machine is treated by spraying plastic.
- * With strong corrosion resistance.

Technical Parameters:

Model	BK-MWT150
Roller Diameter	175 mm
Roller Rotation Speed	900 rpm
Overall Size	450*350*800mm
Weight	37kg
Power Supply	Standard: 220V 50Hz, optional: 110V 60Hz
Packing Size	560*450*900mm
Gross Weight	40kg

Vacuum Seed Counting& Placing Instrument



Features:

- * Used for seed counting, suction and placing in the course of seed germination.
- * Made up of main machine, suction tube and suction head.
- * With control button to control the suction power according to seed size.
- * With 5 different seed suction heads, its size and specification match with Petri dish, meet needs of different seed germi nation.

Technical Parameters:

Model	BK-SCP2000
Temperature	≤ 40 °C
Power	1200W at 220V 50Hz
Power Supply	Standard: 220V 50Hz, optional: 110V 60Hz
Suction Plate	5pcs
Suction Size	12*8.8(100 holes, for corn, 1pc); 16.7*12(1pc); 10.3*10.3(100 holes, 2pcs), Φ8(100 holes/pc)
Packing Size	600*350*260mm
Gross Weight	14kg

Sort	Sucked Seed	Sucked amount	Figure	Incubation utensil
A	Corn/Bean/Cotton Seed/Big Granule Vegetable Seed	25	Rectangle	PL18 PH18
B	Rice/Wheat/Barley/Sorghum	100	Rectangle	PL18 PH18
C	Rice/Wheat/Barley/Sorghum	100	Square	PL12 PH12
D	Rape seed and middle or small granule vegetable seed	100	Square	PL12 PH12
E	Small granule vegetable seed	100	Roundness	φ9mm glass utensil

Automatic Seed Counter



Application:

Automatic seed Counter can automatic count many kinds of grains by setting number. In agriculture it is mainly used in grain count, exp. Rice, wheat, sorghum, corn, vegetables seed and so on.

Features:

- * Two modes: Free count and bulk count.
- * The counting speed is adjustable.
- * High accuracy: Sensitivity levels for different size of particles.
- * Automatic deceleration: when counting number is close to the seting numbe, the counting speed slow down automatically.
- * Automatic motor Protection: the motor will stop work once it detects there is no particles on the plate for 60seconds.
- * User-friendly interface: LCD screen, mode selection, counting time, level and number of particles display clearly.
- * Widely application: suitable for particles includes but is not limited to: crops seeds, vegetable seeds, feed, diamond, tablet.

Technical Parameters:

Model	ASC-C plus
Count Range	1~12mm
Count Accuracy	±2‰
Count Speed	≥1000 /3min(Sesame)
Counting Range	1~99999
Noise	<70db
Power Supply	AC220V, 50Hz; AC110V, 60Hz
Operation Environment	-10℃~ 50℃, <85% RH
External Size(W*D*H)	285*210*176mm
Packing Size(W*D*H)	480*320*250mm
Gross Weight	9.5kg

Titrator

Potential Titrator



- Features for Ti-40:**
 - * Large LCD screen.
 - * Titration methods, curves and results are displayed in detail.
 - * Replaceable burette with high-accuracy(10ml or 20ml selectable).
 - * Support titration modes: DET(Dynamic equivalence point titration), MET(Monotone equivalence point titration), SET(Preset endpoint titration) and MAT(Manual titration).
 - * pH calibration and measurement are supported.
 - * Store up to 50 titration data sets(GLP-compliant) and 1 latest set of titration curve.
 - * Data can be easily transferred to printer via RS-232 communication interface.
 - * Titrator can be controlled by computer via USB or RS-232 communication interface.

- Features for Ti-20:**
 - * LCD display screen.
 - * Support titration modes: SET(Preset endpoint titration) and MAT(Manual titration).
 - * Glass burette can be used for volume measurement(Prepared by user).

Technical Parameters:

Model	Ti-40	Ti-20
Measuring Range	pH: 0.00~14.00pH mV: -1800.0~1800.0mV Temp.: -5.0~105.0°C	pH: 0.00~14.00 Ph mV: ±1400mV
Measuring Resolution	pH: 0.01pH mV: 0.1mV Temp.: 0.1°C	pH: 0.01pH mV: 1mV
Measuring Accuracy	pH: ±0.01pH mV: ±0.05%(full scale) Temp.: ±0.3°C	pH: ±0.03pH mV: ±0.35%(full scale)
Burette Volume Accuracy	10ml burette: ±0.025ml 20ml burette: ±0.035ml	/
Burette Supplementary Speed	55±10s (when burette is full scale)	/
Repeatability Titration Analysis	0.2%	/
Repeatability Accuracy	≤0.2mV	/
Stability	±0.3 mV±1bit/3h	±0.01pH/3h
Sensitive of Control Titration	±2mV	±5mV
Power Supply	AC adapter, 100~240V, 50/60Hz AC input, C24V output	AC adapter, 110/220V, 50/60Hz AC input
External Size(W*D*H)	340*400*400mm	300*235*100mm
Package Size(W*D*H)	540*490*480mm	370*305*330mm
Net Weight	10kg	5kg
Gross Weight	12kg	6kg

Karl Fischer Titrator



Coulometric electrolytic cup
Suitable for micro moisture samples



Sample titrate unit
Suitable for constant moisture samples

- Features:**
 - * LCD display screen.
 - * Titration methods, curves and results are displayed in detail.
 - * Volumetric KF Titration and Coulometric KF Titration are supported.
 - * Data analysis feature helps user review and compare results.
 - * Data can be easily transferred to printer via RS-232 communication interface.
 - * Reset feature automatically resumes all settings back to factory default options.

Volumetric Karl Fischer Titration:

- * Support KF Titration Mode and Titer Detection Mode.
- * Features of auto-filling, auto-purging and auto-mixing of the reagents ensure safe handling of Karl Fischer chemicals.
- * Automatic/manual background drift correction ensures accurate results.
- * Selectable units including mg, mg/L, %, ppm, etc.
- * Settable parameters, including measurement unit, polarization current, stirring rate, titration rate, stop volume,endpoint potential, stop criterion and etc.
- * Store up to 200 titration data sets (GLP-compliant).

Coulometric Karl Fischer Titration:

- * Generator cell with diaphragm.
- * Automatic/manual background drift correction ensures accurate results.
- * Selectable units including ug.mg, %, ppm,mg/L, ug/mL, etc
- * Settable parameters, including measurement unit, polarization current, stirring rate, generator current, endpoint potential, stop criterion and etc.
- * Store up to 200 titration data sets (GLP-compliant).

Technical Parameters:

Model	KFT-40VC	
Volumetric Titration	Range	0.1~250mg
	Polarization Current Accuracy	1μA±0.2μA; 50μA±10μA
	Repeatability	≤0.5%
Coulometric Titration	Range	10μg~20mg
	Polarization Current Accuracy	±0.2μA
	Working Current	1, 1.86, 5, 10ug(H ₂ O)/s for 10.72mA, 20 mA, 53.61mA, 107.2 mA
	Working Current Accuracy	0.5%
	Accuracy	±(5%+3)μg
General	Repeatability	≤3%
	Power Supply	AC adaptor, 100~240V, 50/60Hz AC input
	External Size(W*D*H)	340*400*400mm
	Package Size(W*D*H)	540*490*480mm
	Net Weight	10kg
	Gross Weight	13kg

Karl Fischer Titrator

Features:

- * LCD display screen.
- * Support KF Titration Mode and Titer Detection Mode.
- * Features of auto-filling, auto-purging and auto-mixing of the reagents ensure safe handling of Karl Fischer chemicals.
- * Selectable units including mg, mg/L, %, ppm, etc.
- * Settable parameters, including measurement unit, polarization current, stirring rate, titration rate stop volume, endpoint potential, stop criterion and etc.
- * Store up to 200 titration data sets (GLP-compliant).
- * Data can be easily transferred to printer via RS-232 communication interface.
- * Reset feature automatically resumes all settings back to factory default options.



Technical Parameters:

Model	KFT-40C	
Volumetric Titration	Range	0.1mg~250mg
	Resolution	0.1mg
	Polarization Current Accuracy	1μA±0.2μA; 50μA±10μA
	Repeatability	±0.5%
General Parameters	Power Supply	AC adapter, 100~240V, 50/60Hz AC input
	External Size(W*D*H)	340*400*400mm
	Packing Size(W*D*H)	540*490*480mm
	Net/Gross Weight	10/13kg

Electronic Titrator

Features:

- * High quality motor with excellent precision and accuracy.
- * Electronic control provides a fatigue-free operation.
- * Remote control panel prevents manual disturbance during operation, LCD display.
- * Built-in magnetic stirrer for a complete and easy operation.



Technical Parameters:

Model	dTrite
Cat No.	7017100001
Volume Range	0.01mL-99.99mL, Max piston lift is 10mL, resolution is 10μL
Volume Accuracy	10mL R=0.2% CV=0.07%; 5mL R=0.2% CV=0.1%; 1mL R=1% CV=0.5%
Velocity	16 stages
Operating Temperature Range	15~40℃
Quality Control	DIN EN ISO 8655
Control Type	External control, including the stirrer and the burette program
Power Supply	AC 100~240V, 50/60Hz
Package Size(W*D*H)	300*240*220mm
Gross Weight	1.62kg

Water Activity Meter

Application:

Water activity meter, indicates the free water content when food is stable, measures the possibility of microbial proliferation. Food formulators use water activity to predict how much moisture migration will affect their product, so that to choose suitable package and storage method to reduce the usage of antiseptics.



Features:

- * The measured object is unlimited, liquid solids and powder etc
- * Printer output as standard accessory
- * Chemical resistant. (only for BWA-6)

Technical Parameters:

Model	BWA-3A	BWA-6
Working Temp.	0~50℃	-10℃~50℃
Working Humidity	0~95%RH	
Display	LCD display	
Measuring	Temperature	0~50℃
Range	Water Activity	0~0.980
Measurement	Temperature	±0.5℃
Accuracy	Water Activity	±0.015(@25℃)
Measurement Time	5~40min	
Measurement Points	1	1~4
Temperature Coefficient	≤0.0005/℃	
Activity Repeatability	≤0.01	≤0.008
Print Function	a. Print at the end of the measurement b. Real-time print	
Correction Mode	Single-point calibration	Multi-point joint calibration, single-point calibration
Interface	\	RS232, USB
Standard Accessories	Micro printer, one sensor	Data cable, micro printer, one sensor
Consumption	15W	10W
Power Supply	AC220/110V; 50/60Hz	
Package Size(W*D*H)	555*435*240mm	555*435*240mm(1 Measurement Point) 740*435*240mm(2 Measurement Point) 745*450*240mm(3 Measurement Point) 740*435*240mm(4 Measurement Point)
Gross Weight	10kg	10kg(1 Measurement Point) 12kg(2 Measurement Point) 13kg(3 Measurement Point) 14kg(4 Measurement Point)

Grain Moisture Meter

Application:

It is used for fast and accurate measurement of moisture in the process of allotment, acquisition, storage, machining of packed grains.



Technical Parameters:

Model	TK100G/100GF	TK25G	TK100S	MS-G
Measuring Range	6~30(professional)	6~30%(professional)	5~35%(general)	5~40%(professional)
Temp. Range of Measured Grain	-10~60°C			
Humidity Range	5~90%RH			
Resolution	0.1			
Accuracy	±0.5%			
Grains	6 types (For type TK100G)	25 types	4 types	25 types
Grain Flour	11 groups(For type 100GF, grain flour)	/	Corresponding to the grain flour food	11 grain flour groups (standard)
Power Supply	4*common AAA battery			
Package Size(W*D*H)	504*110*54mm			266*206*76mm
Gross Weight	0.7kg	0.7kg	0.7kg	0.8kg

Model	Grain & Powder List
TK100G	Wheat/rye; maize/corn; soya beans; paddy; rice; barley/oats
TK100GF	Wheat/rye flour; paddy powder; maize/corn flour; semolina; soybean meal; barley/oats powder; coffee powder; sorghum/milo flour; flaxseed meal; pea meal; soft wheat flour
TK25G	Wheat/rye; maize/corn; soya beans; paddy; rice; barley/oats; sorghum/milo; buckwheat; peas; oilseed rape; mustard seed; sunflower seed; sugarbeet seeds; coffee; coffee/green; cocoa beans; linseed; lentils; ground nuts hulled; grass seed/rye grass; grass seed/cockfoot; clover/white seed; clover/red lucerne seed; brassicas/brussels sprout, cabbage seed; beans/tic/winter
TK100S	Wheat/rye; rice; maize/corn; soya beans; wheat flour
MS-G	Wheat/rye; maize/corn; soya beans; paddy; rice; barley/oats; sorghum/milo; buckwheat; peas; oilseed rape; mustard seed; sunflower seed; sugarbeet seeds; coffee; coffee/green; cocoa beans; linseed; lentils; ground nuts hulled; grass seed/rye grass; grass seed/cockfoot; clover/white seed; clover/red lucerne seed; brassicas/brussels sprout, cabbage seed; beans/tic/winter; Wheat/Rye(Ground); Paddy (Ground); Maize/Corn (Ground); Semolina; Soya Beans (Ground); Barley/Oats (Ground); Coffee (Ground); Sorghum/Milo (Ground); Flax(Whole); Peas (Progreata) (Ground); Flour/Soft Wheat

Rapid Moisture Meter




- Features:**
- * It is easy to operate, one key operation, automatic shutdown, quick water content and other values.
 - * The heat dissipation unit adopts the aluminum alloy integrated heat dissipation panel to absorb the extra heat for effective heat dissipation.
 - * Visual and transparent front window design, beautiful and generous, which can observe the moisture change in real time during the working process of the instrument.
 - * Various data display modes: moisture value, initial value of sample, final value of sample, measurement time, initial value of temperature, final value of temperature.
 - * 100 user-defined measurement methods, convenient and fast storage and retrieval, no need to set each time.
 - * RS232 serial port, expandable computer communication, printer communication, PLC and network management.

Technical Parameters:

Model	BM-E50	BM-E10	BM-E01
Weighing Accuracy(d)	0.005g	0.001g	0.0001g
Moisture Readability	0.01%	0.01%	0.001%
Moisture Range MC%	0.00%	0.00%	0.000%
Solid Content Range DC%	-100.00%	-100.00%	-100.000%
Weight Sensor	HBM Strain Gauge Force	Electromagnetic Force	Electromagnetic Force
Weighing Range	124g(optional 220g/300g)		
Calibration Method	External Weight Calibration(Single-Point & Multi-Points)		
Repeatability	<3d		
Heating Source	Halogen Lamp		
Temperature Sensor	PT-1000 Temperature Transmitter		
Heating Program	Standard Heating, Step heating, Rapid heating, Soft Heating		
Heating Temperature Rang	40-200℃		
Temperature Accuracy	0.1℃		
Heating Time setting	1-99 minutes by 1 minute		
Stop Mode	Timing, Manual, Automatic		
Measurement Data	2004 sets		
Display Data	MC%(Moisture), DC%(Solid Content), ATRO Dry, ATRO Wet, Sample Weight, Moisture Weight, Dryer Sample Weight, temperature, Time, Analysis Curve		
Function	Custom Measurement Method, U Disk System Upgrade		
Display & Operating	5-Inch Capacitive Touch Screen		
Sample Tray	50 aluminum sample trays with 90mm diameter, optional stainless steel sample tray		
Sample Height	24.5mm		
Sample Pan	Aluminum Sample Pan(50pcs), Stainless Steel Sample Pan(4pcs)		
Thermal Protection	Aluminum High Temperature Radiator		
Baud rate	2400,4800,9600,19200		
Data Communication	RS232/RS485(can be connected to a computer, printer, PLC, etc.)		
Print Function	Optional Printer(thermal, needle, adhesive, etc.)		
Use Environment	1-38℃(18-25℃ ideal temperature)		
Consumption	500W		
Power Supply	AC220/110V; 50/60Hz		
External Size(W*D*H)	315*210*205mm		
Net Weight	5.8kg	8.8kg	8.8kg
Packing Size(W*D*H)	520*380*410mm		
Gross Weight	7.5kg	15kg	15kg

Cooking Oil Tester

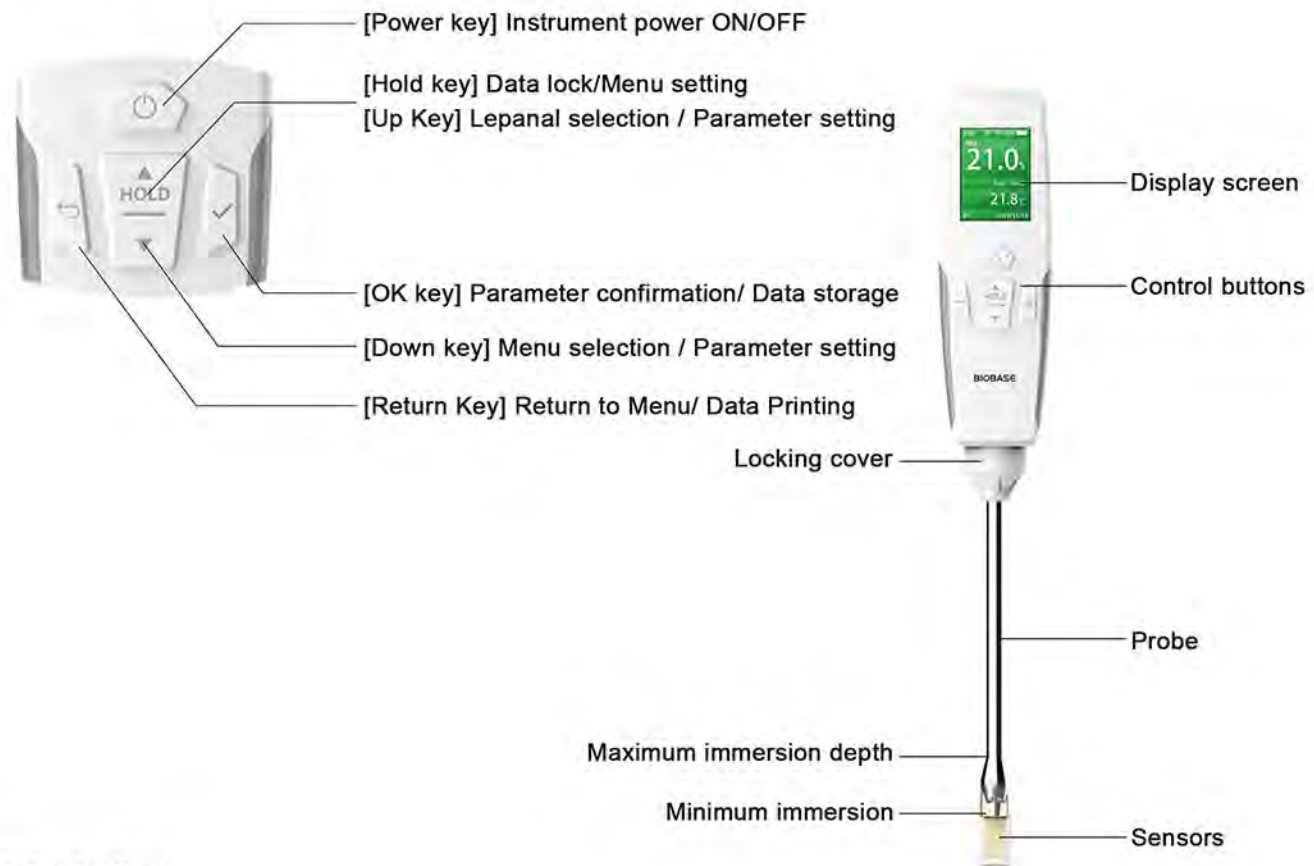

Introduction:

The Cooking Oil Tester is a fast, safe and efficient instrument for testing the quality of edible oil, with short testing time and fast response time. No chemical reagents are used in the measurement process to ensure maximum food and environmental safety. This product detects the total polar material (TPM) in cooking oil to reflect the degree of aging of cooking oil. This product can be directly measured in high temperature oil (not more than 200℃), suitable for all kinds of frying grease quality rapid inspection.

Technical Parameters:

Model	COT-280		
Temperature Range	0~200℃	Response time	<10s
Temperature Accurance	±1℃		
Temperature Resolution	0.1℃	Display type	TFT High Definition LCD
TPM Range	0~50% TPM	Display specifications	2.0 inch, 240*320 resolution, 5 levels of brightness adjustable
TPM Accuracy	±1%TPM	Battery type	approximately 500 times of measurements (factory default configuration)
TPM Resolution	0.1% TPM	Class of Protection	IP65
Temperature Sensor	PTC sensor	Dimension(L*W*H)	347*50.5*37.5mm
TPM Sensor	Capacitive sensor	Net weight	218g(without battery, with case)
Communication	WIFI, Bluetooth	Shell material	ABS engineering plastic
Packing Size(W*D*H)	400*160*80mm		
Gross Weight	1.5kg		

Viscometer

Digital Viscometer BDV-S and BDV-N Series



BDV-1S



BDV-9S



BDV-5S/8S



BDV-N Series

Features:

BDV-S series digital viscometer:

- * Central control circuit: 16 bit MCU.
- * Gearless driving, LCD display.
- * Optional accessories: Printer(BDV-5S and BDV-8S) and RTD temperature probe(not including BDV-1S).

BDV-N series digital viscometer:

- * Measurement is more larger than BDV-S series.
- * Rotating speed is improved to non-polar shift.
- * RTD temperature probe can timely monitor the temperature of the sample.
- * Optional software: Data Collecting, Analysis and Plot Software(Only BDV-N series).

Technical Parameters:

Model	BDV-1S	BDV-9S	BDV-5S	BDV-8S	BDV-1N	BDV-2N	BDV-3N	BDV-4N
Measured Range (mPa·s)	1~100,000	1~6,000,000	20~ 100,000	20~ 2,000,000	20~ 600,000	12~ 6,000,000	160~ 80,000,000	50~ 10,000,000
Rotation Speed(rpm)	6, 12, 30, 60	0.1, 0.3, 0.6, 1.5, 3, 6, 12, 30, 60	6, 12, 30, 60	0.3, 0.6, 1.5, 3, 6, 12, 30, 60	1~60	0.1~99.9	0.1~99.9	0.1~200
Number of Spindle	4 types(L1~L4)				4 types(L1~L4)			4 types (21.27.28.29)
Measurement Accuracy	±5%(FS) (Newtonian Fluid)	±3%(FS) (Newtonian Fluid)	±1%(FS)(Newtonian Fluid)					
Repeatability	±0.5% (FS)(Newtonian Fluid)							
Power Supply	AC 100~240V, 50/60Hz							
Standard Accessory	/	/	RS232 standard output interface		RTD temperature probe, RS232 standard output interface			
Optional Accessory	/	RTD temperature probe	RTD temperature probe, Specially used printer		Specially used printer			
L0 Spindle is for Option Measured Range(mPa.s)	1~10		1~100	1~2000	1~600	0.6~6000	6~6000	3~6000
Package Size (W*D*H)	460*390*230mm		400*350*360mm					400*350 *550mm
Gross Weight	7.5kg		9kg					10.5kg

Digital Viscometer BDV Series

Features:

- * Central control circuit: 16 bit MCU.
- * RTD temperature probe can timely monitor the temperature of the sample.
- * LCD can display all information.
- * Optional software: DV Program Control Download Software & Data Collecting,Analysis and Plot Software.



Technical Parameters:

Series	BDV-1			BDV-2		
Model	BDV-1A	BDV-1B	BDV-1C	BDV-2A	BDV-2B	BDV-2C
Measured Range (mPa·s)	12~6M	80~40M	640~320M	6~6M	40~40M	320~320M
Rotation Speed(rpm)	0.1~99.9 non-polar shift			0.1~200 non-polar shift		
Number of Spindle	4 (L1~L4)	6 (R2~R7)	6 (R2~R7)	4 (L1~L4)	6 (R2~R7)	6 (R2~R7)
Measurement Accuracy	±1%(FS) (Newtonian Fluid)					
Repeatability	±0.5%(FS) (Newtonian Fluid)					
Power Supply	AC 100~240V, 50/60Hz					
Standard accessory	RS232 standard output interface,RTD temperature probe					
Optional accessory	Specially used printer					
L0 Spindle is for Option						
Measured Range (mPa·s)	0.6~6000	6~60000	50~500000	0.3~6000	3~60000	25~500000
R1 Spindle is for Option						
Measured Range (mPa·s)	/	20~100000	160~800000	/	10~100000	80~800000
Package Size(mm)	400*350*360	400*350*550	400*350*550	400*350*360	400*350*550	400*350*550
Gross Weight(kg)	9	10.5	10.5	9	10.5	10.5

Digital Viscometer BKU-1



Features:

- * LCD display
- * BKU-1 viscometer is specially applied to sample like paint, coating, etc.
- * Central control circuit: 16 bit MCU.
- * It can recyclingly show the units of KU, gm, and cP.

Technical Parameters:

Model	BKU-1
Measure Range	40~141KU
	32~1099gm
	27~5274cP
Measurement Accuracy	±1% (FS)(Newtonian Fluid)
Repeatability	±0.5%(FS)(Newtonian Fluid)
Rotation Speed	200rpm
Power Supply	AC 100~240V, 50/60Hz
Package Size(mm)	400*350*360
Gross Weight(kg)	10

Note: cP is for reference, not for calibration.

Water Softener



Full-Automatic Softening Valve



Imported Polishing Resin

Introduction:

Water softener mainly uses ion exchange resin to remove calcium and magnesium ions in water, reducing water hardness.

Features:

- * Conventional well flushing, back flushing, salt absorption, automatic water replenishing operation, no personnel guard;
- * Counter current regeneration technology, prolonging the service life of resin;
- * Ion exchange technology can effectively remove scale;
- * Regular conventional well flushing and back flushing, labor-saving;
- * Imported resin to ensure softening effect;
- * Perfect after-sales service, free 1 year warranty (except consumables).



Pretreatment of Pure Water Machine



Boiler Softening Water



Household Soft Water

Technical Parameters:

Model	BKRSY-500	BKRSY-1000	BKRSY-2000
Source of Intake Water	Water pressure is 0.2-0.5Mpa, hardness <4mmol/L		
Ambient Temp.	2~45°C		
Working Pressure	0.2-0.5Mpa		
Water Consumption	≤ 2% of water yield		
Salt Consumption	100~250g/mol		
Power Consumption	10~40W		
Residual Hardness of Effluent	≤ 0.03mmol/L		
Total Pressure Loss	0.03MPA		
Water Production	500L(Customized)	1000L(Customized)	2000L(Customized)
Power Supply	AC110~220V,50~60Hz		
Product Size(W*D*H)	500*270*610mm	470*330*730mm	490*330*1270mm
Net Weight	20kg	36kg	45kg
Package Size(W*D*H)	515*320*652mm	510*360*960mm	630*460*1360mm
Gross Weight	21kg	40kg	50kg
	Salt-free weight: 15kg	Salt-free weight: 30kg	Salt-free weight: 40kg

Note:Valves are shipped in separate packaging

Water Purifier
Laboratory Water Purifier



Features:

- * Nano RO membrane filters tiny substances more efficiently.
- * Fully automatic control, one-key boot, simple operation.
- * With high pressure and low pressure protection, safer operation.
- * With consumable replacement alarm.
- * Compliance with national standard GB/T6682-2008 water requirements.
- * LCD display, display water quality information.

Technical Parameters:

Model		SCSJ-II-20L	SCSJ-II-30L	SCSJ-II-40L
Water Output Type		RO water outlet*1 and DI water outlet*1		
Water Output Speed		20 L/H	30 L/H	40 L/H
Purifying Procedure		PF+AC+RO+DI		
Water Supply Requirement		When working, the inlet water pressure is 0.1~0.3Mpa, and the water quality meets the requirements of GB5749, 5~45°C		
Environmental Requirements		Temperature 15~35°C Relative Humidity≤80%		
Purification System		10"PP filter*1, 10"active carbon filter*1 300GPD RO membrane*1 Deionization purification column*1		
DI Water Quality	Resistivity	10~18.25MΩ.cm		
	Conductivity	0.055~0.1μs/cm		
	Heavy metal	<0.1ppb		
	Particle	<1/ml		
RO Water Quality	Bacteria	<0.1cfu/ml		
	Ion rejection rate	96%~99%		
	Organic rejection rate	>99%		
	Particles and bacteria rejection rate	>99%		
Flow Rate		1750ml/min		
Consumption		113W		
Power Supply		AC220V, 50;110V, 60Hz (Standard). AC220V, 60Hz;110V, 50Hz (Optional)		
Standard Configuration		Main body , 40L water tank, accessory pack		
Instrument Size(W*D*H)		403*325*650mm		
Package Size(W*D*H)	Instrument	460*420*1200mm		
	Accessory box	670*400*260mm		
Gross Weight		40kg		

Laboratory Water Purifier



Features:

- * Nano RO membrane filters tiny substances more efficiently.
- * Fully automatic control, one-key boot, simple operation.
- * With high pressure and low pressure protection, safer operation.
- * With consumable replacement alarm.
- * Compliance with national standard GB/T6682-2008 water requirements.
- * LCD display, display water quality information.

Technical Parameters:

Model		SCSJ-II-60L	SCSJ-II-60LZ	SCSJ-II-80L	SCSJ-II-100L
Water Output Type		RO water outlet*1 and DI water outlet*1		RO water outlet*1 and DI water outlet*2	
Water Output Speed		60 L/H		80 L/H	100 L/H
Purifying Procedure		PF+AC+RO+DI			
Water Supply Requirement		When working, the inlet water pressure is 0.1~0.3Mpa, and the water quality meets the requirements of GB5749, 5~45°C			
Environmental Requirements		Temperature 15~35°C Relative Humidity≤80%			
Purification System		PP filter *2, Active carbon filter *1,Compressed activated carbon filter *1 Deionization purification column*1 300GPD RO membrane*2(SCSJ-II-60L,SCSJ-II-60LZ,SCSJ-II-80L) 400GPD RO membrane*2(SCSJ-II-100L)			
DI Water Quality	Resistivity	10-18.25MΩ.cm@25°C			
	Conductivity	0.055~0.1μs/cm			
	Heavy metal	<0.1ppb			
	Particle	<1/ml			
	Bacteria	<0.1cfu/ml			
RO Water Quality	Ion rejection rate	96%~99%			
	Organic rejection rate	>99%			
	Particles and bacteria rejection rate	>99%			
Flow Rate		1000ml/min	2500ml/min		
Consumption		60W	84W		144W
Power Supply		AC220V, 50;110V, 60Hz (Standard). AC220V, 60Hz;110V, 50Hz (Optional)			
Standard Configuration		Main body , 50Lwater tank, accessory pack			Main body ,80L water tank(0.5 gallon pressure tank), accessory pack
Instrument Size(W*D*H)		400*393*1002mm			
Package Size(W*D*H)	Instrument	490*480*1095mm	490*480*1100mm		950*490*1100mm
	Tank	415*415*700mm	415*415*700mm		
	Accessory Box	680*400*230mm	675*395*230mm		675*395*230mm
Gross Weight		45kg			70kg

Features:

- * Nano RO membrane filters tiny substances more efficiently.
- * Fully automatic control, one-key boot, simple operation.
- * With high pressure and low pressure protection, safer operation.
- * With consumable replacement alarm.
- * Compliance with national standard GB/T6682-2008 water requirements.
- * LCD display, display water quality information.

Technical Parameters:

Model		SCSJ-II-120L	SCSJ-II-150L	SCSJ-II-200L
Water Output Type		RO water outlet*2 and DI water outlet*2		
Water Output Speed		120 L/H	150 L/H	200 L/H
Purifying Procedure		PF+AC+RO+DI		
Water Supply Requirement		When working, the inlet water pressure is 0.1~0.3Mpa, and the water quality meets the requirements of GB5749, 5~45°C		
Environmental Requirements		Temperature 15~35°C Relative Humidity ≤80%		
Purification System		20"PP filter*1, 20" granular active carbon filter*1 , 20" compressed activated carbon filter*1, 400GPD RO membrane *2, Deionization purification column*2		
DI Water Quality	Resistivity	10~18.25MΩ.cm		
	Conductivity	0.055~0.1μs/cm		
	Heavy metal	<0.1ppb		
	Particle	<1/ml		
	Bacteria	<0.1cfu/ml		
RO Water Quality	Ion rejection rate	96%~99%		
	Organic rejection rate	>99%		
	Particles and bacteria rejection rate	>99%		
Pressure Bucket		Built-in	External	External
Consumption		230W		
Power Supply		AC220V, 50Hz;110V, 60Hz (Standard). AC220V, 60Hz;110V, 50Hz (Optional)		
Standard Configuration		Main body , pressure bucket, accessory pack		
Instrument Size(W*D*H)		750*600*1200mm		
Package Size(W*D*H)	Instrument	770*620*1350mm		
	Pressure tank	/		
	Accessory	555*315*170mm		
Gross Weight		110kg	123kg	



Laboratory Water Purifier



Features:

- * Nano RO membrane filters tiny substances more efficiently.
- * Fully automatic control, one-key boot, simple operation.
- * With high pressure and low pressure protection, safer operation.
- * With consumable replacement alarm.
- * Compliance with national standard GB/T6682-2008 water requirements.

Technical Parameters:

Model		SCSJ-I-10L	SCSJ-I-15L
Water Output Type		RO water outlet*1 and DI water outlet*1	
Water Output Speed		10 L/H	15 L/H
Purifying Procedure		PF+AC+RO+DI	
Water Supply Requirement		When working, the inlet water pressure is 0.1~0.3Mpa, and the water quality meets the requirements of GB5749, 5~45°C	
Environmental Requirements		Temperature 15~35°C Relative Humidity ≤80%	
Purification System		10"PP filter*1, 10"active carbon filter*2 50GPD RO membrane *1 Deionization purification column*2	
DI Water Quality	Resistivity	10~18.25MΩ.cm	
	Conductivity	0.055~0.1μs/cm	
	Heavy metal	<0.1ppb	
	Particle	<1/ml	
	Bacteria	<0.1cfu/ml	
RO Water Quality	Ion rejection rate	96%~99%	
	Organic rejection rate	>99%	
	Particles and bacteria rejection rate	>99%	
Flow Rate		167ml/min	250ml/min
Consumption		46W	
Power Supply		AC220V, 50/110V, 60Hz (Standard). AC220V, 60Hz;110V, 50Hz (Optional)	
Standard Configuration		Main body	
Instrument Size(W*D*H)		390*400*503mm	
Package Size(W*D*H)		500*520*650mm	
Gross Weight		27kg	

Water Purifier (Automatic RO/DI Water)



Technical Parameters:

Model		SCSJ-III 15	SCSJ-III 30
Display		LCD	
Water Output Type		RO and DI water	
Water Output Speed		15L/H	30L/H
Purifying Procedure		PF+AC+RO+DI	
Water Supply Requirement		Tap water: TDS<200ppm, 5~45°C, 1.0~4.0Kgf/cm² (If inlet TDS>200ppm, extra pretreatment filter is recommended)	
Purification System	Pretreatment unit	Folded composite filter element*1 Active carbon filter *1	Folded composite filter element*1 Active carbon filter *1
	RO unit	100GPD RO membrane*1	200GPD RO membrane*1
	Subsequent unit	Deionization purification column (imported resin) *2	Deionization purification column (imported resin) *3
Pure Water Quality	Ion rejection rate	97%~99% (New RO membrane)	
	Organic rejection rate	>99%, when MW>200 Dalton	
	Particles and bacteria rejection rate	>99%	
	Resistivity	15~18.2MΩ·cm	
		Conductivity	
		0.055~0.067μs/cm	
Control System		Automatic electronic pressure sensor controlling, RO membrane auto flushing, Automatic stop when water supply shortage, Automatic stop when water tank full, Automatic cutting off water when pump stop, 24 hours non-stop work	
Flow Rate		2.0 L/min (when there is water in the water tank)	
Water Quality Monitor		TDS/conductivity test pen	
Consumption		72W	
Power Supply		AC220V, 50/60Hz; AC110V, 50/60Hz	
Standard Configuration		Main body(include1 set of purification column),15Lwater tank, TDS/conductivity test pen,accessory pack	
External Size(W*D*H)		410*220*420mm	
Package Size(W*D*H)		600*490*580mm	
Gross Weight		35kg	

Water Purifier Medium Type (Automatic RO/DI Water)

Features:

- * Large LCD display, animation mode, show all the running state and parameters.
- * Automatic microcomputer control system, multi-menu operating,
- * Alarm function: Water quality, no water, full water, consumables life ending. Automatic diagnosis.
- * 3-way on-line sensor, detect the quality of feed water, RO water and DI water's quality timely.



Technical Parameters:

Model		SCSJ-V 45	SCSJ-V 63	SCSJ-V 94	SCSJ-V 125
Water Output Type		RO and DI water			
Water Output Speed		45L/H	63L/H	94L/H	125L/H
Purifying Procedure		PF+AC+RO+AC+DI+TF			
Water Supply Requirement		Tap water: TDS<200ppm, 5~45°C, 1.0~4.0Kg/cm² (if TDS>200ppm, extra pretreatment filter is recommended)			
Purification System	Pretreatment unit	20"PP filter*1, 20" granular active carbon filter*1 , 20" active carbon block filter*1			
	RO unit	300 GPD RO membrane*1	400 GPD RO membrane*1	600 GPD RO membrane*1	400 GPD RO membrane*2
	Subsequent unit	Organic matter purification column*1; 12L ultra-purified column (imported resin)*1; 0.2µm imported PES terminal filter*1			
DI Water Quality	Resistivity	10-18.2MΩ.cm			
	Conductivity	0.1-0.055µs/cm			
	Heavy metal	<0.1ppb			
	Bacteria	<0.01cfu/ml			
	Particle(>0.2µm)	<1/ml			
Flow Rate		3.0 L/min (when there is water in the water tank)			
RO Water Quality		TDS(Total dissolved solid) of RO water(ppm)<TDS of inlet water*5%			
Consumption		120W		240W	
Power Supply		AC220V, 50/60Hz; AC110V, 50/60Hz			
Standard Configuration		Main body(include 1 set of purification column), 2 built-in 15 liters tank, accessory pack			
External Size(W*D*H)		640*540*1110mm			
Package Size(W*D*H)		650*750*1280mm			
Gross Weight		90kg			

Water Purifier Medium Type (Automatic RO Water)




Features:

- * Large LED display, show all the running state and parameters.
- * RO membrane clean automatically. High/Low pressure protection.
- * Alarm function: Water quality, no water, full water, consumables life ending. Automatic diagnosis.

Technical Parameters:

Model		SCSJ-IV 45	SCSJ-IV 63	SCSJ-IV 94	SCSJ-IV 125
Water Output Type		RO water			
Water Output Speed		45L/H	63L/H	94L/H	125L/H
Purifying Procedure		PF+AC+AC+RO			
Water Supply Requirement		Tap water: TDS<200 ppm, 5~45°C, 1.0~4.0Kg/cm² (if TDS>200ppm, extra pretreatment filter is recommended)			
Purification System	Pretreatment unit	20" PP filter*1, 20" granular active carbon filter*1 , 20" active carbon block filter*1			
	RO unit	300 GPD RO membrane*1	400 GPD RO membrane*1	600 GPD RO membrane*1	400 GPD RO membrane*2
Pure Water Quality	Ion rejection rate	97%~99% (New RO membrane)			
	Organic rejection rate	>99%, when MW>200 Dalton			
	Particles and bacteria	>99%			
	Rejection rate	<0.01cfu/ml (with optional 0.2µm PES terminal filter)			
	Bacteria	<1/ml (with optional 0.2µm PES terminal filter)			
	Particles(>0.2µm)	TDS meter, Online resistivity monitor(optional)			
Water Quality Monitor		TDS/conductivity test pen, accessory pack			
Consumption		120W		240W	
Power Supply		AC220V, 50/60Hz; AC110V,50/60Hz			
Standard Configuration		Main body (Including 1 set of purification column), 2 built-in15L water tank			
External Size(W*D*H)		640*540*1110mm			
Package Size(W*D*H)		650*750*1280mm			
Gross Weight		90kg			

Water Purifier (Automatic RO Water)

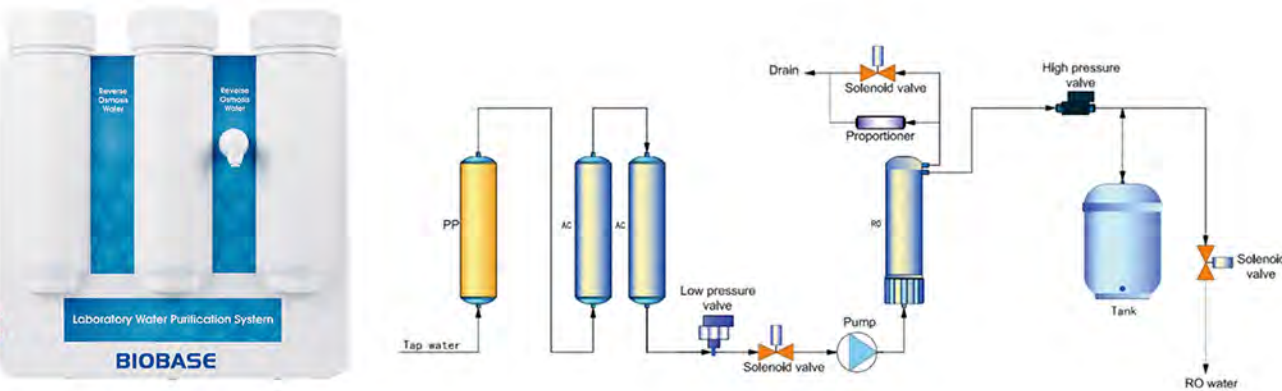

Technical Parameters:

Model		SCSJ-II 15	SCSJ-II 30
Water Output Type		RO water	
Water Output Speed		15L/H	30L/H
Purifying Procedure		PF+AC+RO+AC	
Water Supply Requirement		Tap water: TDS<200 ppm, 5~45°C, 1.0~4.0Kgf/cm² (if inlet TDS>200ppm, extra pretreatmentfilter is recommended)	
Purification System	Pretreatment unit	Folded composite filter element *1 Activated carbon filter *1	
	RO unit	100GPD RO membrane *1	200GPD RO membrane *1
Pure Water Quality	Ion rejection rate	97%~99% (New RO membrane)	
	Organic rejection rate	>99%, when MW>200 Dalton	
	Particles and bacteria rejection rate	>99%	
	Bacteria	<0.1cfu/ml (with optional 0.45+0.1µm PES terminal filter)	
		Particles(>0.2µm)	
		<1/ml (with optional 0.45+0.1µm PES terminal filter)	
Flow Rate		2.0L/min (with pressure tank)	
Water Quality Monitor		TDS/conductivity test pen	
Consumption		72W	
Power Supply		AC220V, 50/60Hz; AC110V,50/60Hz	
Standard Configuration		Main body (Include 1 set of purification column), 15 liters tank, TDS/conductivity test pen,accessory pack	
External Size(W*D*H)		410*220*420mm	
Package Size(W*D*H)		600*490*580mm	
Gross Weight		35kg	

Water Purifier Medium Type (Automatic Ultra-pure Water)



Features:

- * UV type with UV lamp, Double wavelength(185&254nm), sterilizer and reduce TOC, expand the usage range.
- * UF type with UF filter, Eliminate the endotoxin efficiently.
- * Other features same as Automatic RO/DI water purifier.

Technical Parameters:

Model		SCSJ-VI	SCSJ-VII	SCSJ-VIII	SCSJ-IX
		Basic	Eliminating endotoxin UF	Low TOC UV	Synthesizing UVF
Water Output Type		RO and ultra-pure water			
Water Output Speed		45/63/94/125 L/H			
Purifying Procedure		PF+AC+RO+AC+DI	PF+AC+RO+AC+DI+UF	PF+AC+RO+AC+UV+DI	PF+AC+RO+AC+UV+DI+UF
Water Supply Requirement		Tap water: TDS<200 ppm, 5~45°C, 1.0~4.0Kgf/cm² (if TDS>200ppm, extra pretreatment filter is recommended)			
Purification System	Pretreatment Unit	20" PP filter*1, 20" granular active carbon filter*1, 20" active carbon block filter*1			
	RO unit	300 GPD RO membrane*1 (for 45L) 400 GPD RO membrane*1 (for 63L) 600 GPD RO membrane*1 (for 94L) 400 GPD RO membrane*2 (for 125L)			
	Subsequent unit	Organic matter purification column*1 12L ultra-purified column (imported resin)*1 0.2µm imported PES terminal filter*1 Ultra Purification Column*2 MWCO5000D UF ultrafiltration module (SCSJ-VII and SCSJ-IX) Dual wavelength (185nm&254nm) UV lamp (SCSJ-VIII,SCSJ-IX)			
Ultrapure Water Quality	Resistivity(25°C)	18.2MΩ.cm			
	Heavy Metal Ion	<0.01ppb			
	TOC	<10ppb			
	Bacteria	<0.01cfu/ml			
	Endotoxin	N/A	<0.001Eu/ml	N/A	<0.001Eu/ml
	Particle(>0.2µm)	<1/ml			
	RNases	N/A	<1pg/ml	N/A	<1pg/ml
ROWater Quality	DNases	N/A	<5pg/µl	N/A	<5pg/µl
	Ion Rejection Rate	97%~99% (New RO membrane)			
	Organic Rejection Rate	>99%, when MW>200 Dalton			
	Pa rticles And Bacteria Rejection Rate	>99%			
Flow Rate		3.0 L/min (when there is water in the water tank)			
Power Supply		AC220V, 50/60Hz; AC110V, 50/60Hz			
Consumption		(45/63L/H):120W ; (94/125L/H):240W			
Standard Configuration		Main body (Include 1 set of purification column), 2 built-in15L tank, accessory pack			
External Size(W*D*H)		640*540*1110mm			
Package Size(W*D*H)		650*750*1280mm			
Gross Weight		90kg			

Ultrapure Water Purifier

Features:

- * Water supply, RO water, UP water three water quality detection, all levels of consumables life alarm.
- * 5 inch LCD screen, real-time display of running status.
- * It has the function of taking water at regular time.
- * High and low pressure protection function.
- * Automatically shut down when water is cut off, automatically shut off water when shut down.
- * Automatic washing after starting, effectively extend the life of filter element.
- * Pressure water, to meet different customer requirements.



Technical Parameters:

Model		BK-UP-20L	BK-UP-30L
Water Output Type		UP water outlet*1, RO water outlet*1, DI water outlet*1	
Water Output Speed(25°C)		20 L/H	30 L/H
Purifying Procedure		PF+AC+RO+AC+UV+UP+TF	
Water Supply Requirement		When working, the inlet water pressure is 0.1-0.3Mpa, and the water quality meets the requirements of GB5749, 5~45°C	
Purification System		PP filter *1 Granular activated carbon filter*1 High quality coconut shell activated carbon filter *1 Large T33 filter*1 RO membrane *2 ultra-purification column *4 Capsule filter *1	
UP Water Quality	Resistivity	18.1MΩ.cm@25°C	
	Sodium Ion	<0.1µg/l	
	Chloride Ion	<0.1µg/l	
	Heavy Metal Ion	<0.1µg/l	
	Si	<2µg/l	
	Bacteria	<1cfu/100ml	
	TOC	20µg/L	
DI Water Quality	Resistivity	10-18.1MΩ.cm@25°C	
	Absorbance(254nm,1 cm optical path length)	≤0.001	
	Soluble Silicon (SiO ₂)	≤0.01	
RO Water Quality	Ion Rejection Rate	96%~99%	
	Organic Rejection Rate	>99%	
	Particles and Bacteria Rejection Rate	>99%	
Consumption		74W	
Power Supply		AC100~240V, 50/60Hz	
Instrument Size(L*W*H)		386*481*461mm	
Package Size(L*W*H)		Main body: 540*455*540mm, 21.5kg Accessory kit: 425*295*475mm, 5kg	
Gross Weight		26.5kg	

Features:

- * Water supply, RO water, UP water three water quality detection, all levels of consumables life alarm.
- * 5 inch LCD screen, real-time display of running status.
- * It has the function of taking water at regular time.
- * High and low pressure protection function.
- * Automatically shut down when water is cut off, automatically shut off water when shut down.
- * Automatic washing after starting, effectively extend the life of filter element.
- * Pressure water, to meet different customer requirements.



Technical Parameters:

Model		BK-UP-40L	BK-UP-60L
Water Output Type		UP water outlet*1, RO water outlet*1, DI water outlet*1	
Water Output Speed(25°C)		40 L/H	60 L/H
Purify Purifying Procedure		PF+AC+RO+AC+UV+UP+TF	
Water Supply Requirement		When working, the inlet water pressure is 0.1-0.3Mpa, and the water quality meets the requirements of GB5749, 5~45°C	
Purification System		PP filter *1 Granular activated carbon filter *1 (postposition) High quality coconut shell activated carbon filter *1 400GPD RO membrane *1 75GPD RO membrane *1 Ultra-purification column *4 Capsule filter *1	
UP Water Quality	Resistivity	18.1MΩ.cm@25°C	
	Sodium Ion	<0.1µg/l	
	Chloride Ion	<0.1µg/l	
	Heavy Metal Ion	<0.1µg/l	
	Si	<2µg/l	
	Bacteria	<1cfu/100ml	
	TOC	20µg/l	
DI Water Quality	Resistivity	10-18.1MΩ.cm@25°C	
	Absorbance(254nm, 1 cm optical path length)	≤0.001	
	Soluble Silicon (SiO ₂)	≤0.01	
RO Water Quality	Ion Rejection Rate	96%~99%	
	Organic Rejection Rate	>99%	
	Particles and Bacteria Rejection Rate	>99%	
Consumption		100W	
Power Supply		AC100~220V, 50/60Hz	
Instrument Size(L*W*H)		386*481*461mm	
Package Size(L*W*H)		Main body: 540*455*540mm, 21.5kg Accessory kit: 425*295*475mm, 5kg	
Gross Weight		26.5kg	

Laboratory Water Purifier



- Features:**
- * Automatic operation control, automatic start and stop, unattended.
 - * Preprocessing system automatic flushing and regeneration operation.
 - * Automatic cleaning and maintenance function of the reverse osmosis host, with automatic pulse flushing function.
 - * With no water protection, pressure protection and other safety self-locking devices.
 - * Multi-functional monitoring, water quality, flow, pressure and other online display.
 - * Intelligent balancing system ensures stable and safe operation of equipment.
 - * Integrated structure design of reverse osmosis host, small foot print easy maintenance.
 - * Tap water quality test, if not meet the requirements, the machine will automatically alarm.(Except SCSJ-II-1000LF)
 - * Increase the use information of consumables, when the consumables expire, the machine will alarm and remind the user to replace the consumables.(Except SCSJ-II-1000LF)
 - * Add removable casters for easy installation and field movement.(Except SCSJ-II-1000LF)
 - * 10-inch touch screen display, machine operating status and water quality monitoring of each part are displayed on the screen.(Except SCSJ-II-1000LF)

Technical Parameters:

Model		SCSJ-II-300LF	SCSJ-II-600LF	SCSJ-II-1000LF
Water Output Type		RO water outlet*1 and DI water outlet*1		
Water Output Speed		300L/h/set(25℃)	600L/h/set(25℃)	1000L/h/set(25℃)
External Size(Without Water Tank)(L*W*H)		1150*930*1530mm	1150*930*1530mm	1350*700*1700mm
Water Tank(Optional)		Φ720*1150mm	Φ720*1150mm	Φ1100*1350mm
External Size(With Water Tank)(L*W*H)		1870*930*1530mm		2500*1200*1800mm
Water Utilization Rate		≥60%		
Desalinization Rate		≥98%		
Production Water Quality Treatment Method		Single stage reverse osmosis and mixed bed resin		
Control Mode		10-inch touch screen, fully automatic control		PLC automatic control
Producing Water Quality		Ionic retention rate: 96~99%		
		Organic retention rate: >99%		
		Particle and bacterium retention rate: >99%		
		DI water: ≥10MΩ.cm under standard GB/T6682-2008		
Component		Preprocessing device, reverse osmosis device, mixed bed resin and pure water supply device		
Power Supply		AC220V, 50Hz(Standard); AC380V, 50Hz(Optional)		
Packing Size	Equipment host	1350*1130*1750mm	1350*1130*1750mm	1450*800*1780mm
	Accessory	1220*820*1250mm	1220*820*1250mm	1050*750*880mm
Gross Weight(Equipment Host & Accessory)		450kg	450kg	600kg

Consumables and Recommended Replacement Time

Standard Quantity (Recommended Replacement Time)	SCSJ-II-300LF	SCSJ-II-600LF	SCSJ-II-1000LF
Activated Carbon	15kg(About 2 years)	15kg(About 2 years)	50kg(About 2~3 years)
Quartz Sand	50kg(About 2 years)	50kg(About 2 years)	100kg(About 2~3 years)
Softening Resin	25L(About 2 years)	25L(About 2 years)	75L(About 2~3 years)
PP Filter Element	1pc*2(About 3 months)	1pc*2(About 3 months)	1pc*2(About 1~3 months)
Folding Filter Element	1pc*2(About 6 months)	1pc*2(About 6 months)	1pc*2(About 3~6 months)
Reverse Osmosis Membrane	2pcs(About 2 years)	2pcs(About 2 years)	4pcs(About 2~3 years)
Fine Mixed Resin	30L(About 30000L of water)	30L(About 30000L of water)	50L(Replacement is recommended at 3-6 months)
Resin Regeneration Exchange Agent	/	/	3kg(According to the test agent test cycle)

Laboratory Water Purifier

Application:

Provide ultra-pure water for biochemical room, laboratory department and laboratory water points.

Features:

- * Automatic operation control, automatic start and stop, unattended.
- * Preprocessing system automatic flushing and regeneration operation.
- * Automatic cleaning and maintenance function of the reverse osmosis host, with automatic pulse flushing function.
- * With no water protection, pressure protection and other safety self-locking devices.
- * Multi-functional monitoring, water quality, flow, pressure and other online display.
- * Intelligent balancing system ensures stable and safe operation of equipment.
- * Integrated structure design of reverse osmosis host, small footprint, easy maintenance.



Technical Parameters:

Model	SCSJ-II-300L	SCSJ-II-500L	SCSJ-II-1000L
Water Output Type	DI water outlet *1, RO water outlet can be optional		
Water Output Speed	300L/h/set (25℃)	500L/h/set (25℃)	1000L/h/set (25℃)
Equipment Host Size (L*W*H)	1500*800*1800mm		
Water Utilization Rate	≥60%		
Desalinization Rate	≥99%		
Production Water Quality Treatment Method	Double stage reverse osmosis and EDI deep desalting device		
Control Mode	PLC automatic control, full color touch screen operation		
Producing Water Quality	10~18.2MΩ.cm		
Component	Preprocessing device, reverse osmosis device, EDI device and pure water supply device		
Power Supply	AC380V±10%, 50/60Hz		
Package Size (L*W*H)	Host: 1860*960*1830mm Accessory: 1100*1000*1740mm		Host:1960*960*1830mm Accessory:1100*1000*1740mm
Gross Weight	Host: 300kg Accessory: 500kg	Host:350kg Accessory:550kg	Host:400kg Accessory:600kg

Consumables and Recommended Replacement Time

Standard Quantity(Recommended Replacement Time)	SCSJ-II-300L	SCSJ-II-500L	SCSJ-II-1000L
PP Filter Element	6(6 months)	6(6 months)	6(6 months)
Precision Filter Element	1(6 months)	1(6 months)	1(6 months)
Sodium Ion Resin	2(12~18 months)	2(12~18 months)	5(12~18 months)
Activated Carbon	1(12~18 months)	1(12~18 months)	2(12~18 months)
Reverse Osmosis Membrane	3(18~24 months)	6(18~24 months)	3(18~24 months)
EDI	1	1	1

Laboratory Water Purifier

Features:

- * New design with a 7-inch color touch screen for comprehensive information display, offering a new touch control experience at your fingertips.
- * Six-stage filtration, large-capacity consumables, and extended service life.
- * Automatic RO film anti-scaling and washing function, effectively extend the life of the filter element.
- * Triple water quality and dual flow rate detection, with automatic water collection for RO and DI, capable of scheduled, quality-based and quantity-based automatic water collection.
- * Comprehensive consumables management and data processing enable a richer set of functional configurations.



Technical Parameters:

Model		BK-DI-20L	BK-DI-30L	BK-DI-40L
Water Output Type		RO water outlet*2, DI water outlet*2		
Water Output Speed (25℃)		20L/H	30L/H	40L/H
Purifying Procedure		PF+AC+RO+UV+DI+TF		
Purification System		PP filter*1 Active carbon filter*1 RO membrane 3012-300*1 12L deionization purification column*1 UV lamp*1 Capsule filter*1		
DI Water Quality	Resistivity	10~18MΩ.cm		
	Conductivity	0.055~0.1us/cm		
	Heavy Metal	<0.1ppd		
	Particle	<0.1cfu/mL		
	Bacteria (>0.2μm)	<1/mL		
RO Water Quality	Ion Rejection Rate	96%~99%		
	Organic Rejection Rate	>99%		
	Particle and Bacteria Rejection Rate	>99%		
Display		7-inch touch screen		
Water Quality Testing		Tap water, RO and DI water quality testing		
Water Storage		External pressure water tank		
Consumable Alarm		Alarms for the lifespan of consumables at various levels, displaying the used time and quantity, with automatic reminders for replacement upon expiration		
Flow Rate		2.0L/min (With external pressure tank)		
Standard Accessory		Pressure water tank		
Optional Accessories		USB interface, SD card slot, RS232 interface for connection to a mini printer or monitoring software, multi-specification water storage tank, compatible with pressure water tanks and water level tanks for two types of pure water storage methods, water dispensing arm		
Power Supply		AC 100~240V, 50/60Hz		
Consumption		60W		
External Size (W*D*H)		535*400*640mm		
Package Size (W*D*H)		Main machine: 600*460*750mm Accessory kit: 415*285*465mm		
Net Weight		46.5kg		
Gross Weight		Main machine: 60kg Accessory kit: 5kg		

Water Purifier(Automatic RO/DI Water)

Introduction:

It is suitable for all kinds of general chemical analysis, sample dilution reagent preparation, water quality analysis, and biochemical apparatus supporting pure water machine.

Features:

- * Online resistivity to display the real time water quality. (Value display)
- * The whole system uses new type filter cartridge, no water seepage and leakage;
- * Easy maintenance and replacement for the filter cartridge.
- * All piping activated carbon filter elements are certified by NSF.



Technical Parameters:

Model		SCSJ-10D	SCSJ-20D	SCSJ-30D
Water Output Type		RO and DI water		
Output (25°C)		10L/H	20L/H	30L/H
Flow Rate		Up to 1.5~2 liters/minute (with pressure tank)		
Resistivity (25°C)		10~16 MΩ.cm		
Particle (>0.22μm)		<1/ml		
Ion Rejection Rate		95%~99% (new RO membrane)		
Particles and Bacteria Rejection Rate		>99%		
Water Supply Requirements		Tap water, TDS<200ppm, 5~45°C, 1.0~4.0Kg/cm2		
Consumption		48~72W		
Power Supply		AC110/220V±10%, 50/60Hz		
Standard Configuration		Main body (Including 1 set of cartridge), 12 liters pressure tank		
Purification System	Pretreatment unit	11" U type Quick-Insert PP Cotton Filter*1		
		11" U Type Quick-Insert Active Carbon Filter*2		
	RO unit	11" U Type Quick-Insert deionized Purification Column*3		
		75 GPD RO membrane*1		
		150 GPD RO membrane*1		
		200 GPD RO membrane*1		
External Size(W*D*H)		410*270*500mm		
Package Size(W*D*H)		550*630*680mm		
Gross Weight		35kg		

Remarks: *The value will be influenced by temperature and feed water's quality.

Water Purifier(Automatic RO/Ultra-pure Water)

Introduction:

Specially designed for the high-precision laboratory.
Low ion, organic matter content, heat source and nucleic acid enzyme.
Multi-step purification process, UV sterilization and ultra-filtration technologies.

Features:

- * Real-time LCD display.
- * Alternative water bucket size to meet different needs.
- * New type filter cartridge, no water seepage and leakage.
- * Easy to maintenance and replacement for the filter cartridge.
- * Automatic electronic pressure sensor controlling, RO membrane auto flushing.



Technical Parameters:

Model		Standard SCSJ-10L SCSJ-20L SCSJ-30L	Eliminating endotoxin SCSJ-10F SCSJ-20F SCSJ-30F	Low TOC SCSJ-10V SCSJ-20V SCSJ-30V	Synthesizing SCSJ-10VF SCSJ-20VF SCSJ-30VF
Output(25°C)		10series-10L/H, 20 series-20L/H, 30 series-30L/H			
Flow Rate		Up to 2 liters/minute(with pressure tank)			
Water Output Type		RO and ultra-pure water			
Resistivity(25°C)		18.2MΩ.cm			
TOC*		<10ppb	<10ppb	<3ppb	<3ppb
Bacteria		<0.1cfu/ml			
Particle(>0.22μm)		<1/ml			
Endotoxin		N/A	<0.001Eu/ml	N/A	<0.001Eu/ml
Ion Rejection Rate		95%-99% (new RO membrane)			
Particles and Bacteria Rejection Rate		>99%			
Water Supply Requirements		Tap water, TDS<200 ppm, 5~45°C, 1.0~4.0Kg/cm2			
Standard Configuration		Main body (Including 1 set of cartridge), 12 liters pressure tank			
Purification System	Pretreatment unit	11" U type Quick-Insert PP Cotton Filter*1			
		11" U Type Quick-Insert Active Carbon Filter*2			
	RO unit	75 GPD RO membrane*1(for 10L) 150 GPD RO membrane*1(for 20L) 200 GPD RO membrane*1(for 30L)			
		11" U Type Quick-Insert Ultra Purification Column*4			
		0.2 μm PES terminal filter*1			
		Imported PES 5000 Dalton UF Heat Source Column*1(for SCSJ-F and SCSJ-VF series) Dual wavelength (185 & 254 nm) UV lamp (import)*1(for SCSJ-V and SCSJ-VF series)			
Consumption		48~72W			
Power Supply		AC110/220V±10%, 50/60Hz			
External Size(W*D*H)		410*270*500mm			
Package Size(W*D*H)		550*630*750mm			
Gross Weight		40kg			

Remarks: *The value will be influenced by temperature and feed water's quality.

Water Purifier(Automatic RO/DI/Ultra-pure Water)

Features:

- * Automatic microcomputer controlling.
- * Real-time display all the running state and parameters.
- * Low Ion, organic matter, heat source and nucleic acid enzyme.
- * Multi-step purifying process and UV sterilization and ultra-filtration technology.

Technical Parameters:

Model		SCSJ-40D	SCSJ-40U
		SCSJ-60D	SCSJ-60U
		SCSJ-120D	SCSJ-120U
Water Output Type		RO and DI water	RO and ultra-pure water
Output(25°C)		40/60/120L/H	
Flow Rate		Up to1.5~2 liters/minute(with pressure tank)	
Resistivity(25°C)		10~16 MΩ.cm	18.25MΩ.cm
Particle(>0.22μm)		/	<1/ml
Ion Rejection Rate		95%~99% (new RO membrane)	
Particles and Bacteria Rejection Rate		>99%	
Water Supply Requirements		Tap water, TDS<200ppm, 5~45°C, 1.0~4.0Kg/cm2	
Consumption		7~240W	
Power Supply		AC110/220V±10%, 50/60Hz	
Standard Configuration		Main body (Including 1 set of cartridge), 40 liters pressure tank	
Purification System	Pretreatment unit	20" PP Cotton Filter*1, 20" Refined Activated Carbon Rod Filter*2	
	RO unit	400 GPD RO membrane*1(for 40L and 60L)	
		400 GPD RO membrane*2(for 120L)	
	Subsequent unit	12L deionization purification tank*1	
11" ultra purification column*2 (for SCSJ-U series)			
		0.2 μm PES terminal filter*1 (for SCSJ-U series)	
External Size (W*D*H)		500*520*1080mm	
Package Size (W*D*H)		620*620*1180mm, 430*430*650mm	
Gross Weight		40L/H: 95kg,15kg	40L/H: 98kg,15kg
		60L/H: 95kg,15kg	60L/H: 99kg,15kg
		120L/H:100kg,18kg	120L/H:100kg,18kg

Remarks: The value will be influenced by temperature and feed water's quality.



Laboratory Pure Water System



Introduction:

Laboratory water purifier is a kind of laboratory water purification equipment. It is a water treatment device that removes solid impurities, salt ions, bacteria and viruses in water through pretreatment, reverse osmosis, EDI, and other methods.

Features:

- * PLC program control, automatic operation of forward washing, backwashing, salt absorption and water replenishment, no need for personnel supervision.
- * 7-inch PLC electronic touch screen, intuitive display of working status, convenient human-computer interaction.
- * The program is equipped with low-voltage and high-voltage alarms, and the machine will automatically stop when it fails, effectively preventing machine damage.
- * Online monitoring function of raw water, pure water and ultrapure water quality.
- * The reverse osmosis membrane is automatically flushed regularly to extend the service life of the membrane.
- * Equipped with a liquid level switch, it will automatically stop when the water is full and automatically replenish water when it is short of water.
- * The machine is equipped with an ozone generator and ultraviolet sterilization device to ensure the killing of bacteria and microorganisms in the water.
- * Equipped with a 0.5T stainless steel sterile water tank to ensure that the reserve water is not contaminated.

Technical Parameters:

Model	BKSROEZ-300	BKSROEZ-500	BKSROEZ-750	BKSROEZ-1000
Pure Water Capacity	300L/H	500L/H	750L/H	1000L/H
Supply Water	City tap water, water temperature 2-45°C, water pressure 0.2-0.5Mpa, TDS<300ppm			
Ambient Temp.	2-45°C			
Purified Water Conductivity	≤0.01ms/m			
Absorbance (254nm, 1cm optical path)	≤0.001			
Soluble Silicon (expressed as silica)	≤0.01mg/L			
Ion Removal Rate	≥99%			
Power Supply	380V 50Hz			

Water Purifier Consumables

Model Type	PP filter	5um PP deep filter	20" PP filter	Folded composite filter element	Active carbon filter	Granular active carbon filter	Active carbon block filter	12L Deionization purification column (imported resin)	Deionization purification column	12L ultra-purified column (imported resin)	Ultra-purified column (imported resin)	RO membrane	Organic matter purification column	0.2µm imported PES terminal filter	MWCO 5000D UF ultrafiltration module	Dual wavelength (185nm & 254nm) UV lamp
Replacement term/set(months)	2-6	5-6	2-3	6-12	4-6	2-6	2-6	about 20000L pure water/set	about 1000L pure water/set	about 20000L pure water/set	about 1000L pure water/set	12-24	about 9000L pure water/set	/	/	about 9000 hours
SCSJ-II (15L/H)	/	/	/	1	1	/	/	/	/	/	/	100*1	/	/	/	/
SCSJ-II (30L/H)	/	/	/	1	1	/	/	/	/	/	/	200*1	/	/	/	/
SCSJ-III(15L/H)	/	/	/	1	1	/	/	2	2	/	/	100*1	/	/	/	/
SCSJ-III(30L/H)	/	1	/	1	1	/	/	3	3	/	/	200*1	/	/	/	/
SCSJ-IV(45L/H)	/	/	1	/	/	1	1	/	/	/	/	300*1	/	/	/	/
SCSJ-IV(63L/H)	/	/	1	/	/	1	1	/	/	/	/	400*1	/	/	/	/
SCSJ-IV(94L/H)	/	/	1	/	/	1	1	/	/	/	/	600*1	/	/	/	/
SCSJ-V(125L/H)	/	/	1	/	/	1	1	/	/	/	/	400*2	/	/	/	/
SCSJ-V(45L/H)	/	/	1	/	/	1	1	/	/	/	/	300*1	/	/	/	/
SCSJ-V(63L/H)	/	/	1	/	/	1	1	/	/	/	/	400*1	/	/	/	/
SCSJ-V(94L/H)	/	/	1	/	/	1	1	/	/	/	/	600*1	/	/	/	/
SCSJ-VI(125L/H)	/	/	1	/	/	1	1	/	/	/	/	400*2	/	/	/	/
SCSJ-VI(45L/H)	/	/	1	/	/	1	1	/	/	2	2	300*1	/	/	/	/
SCSJ-VI(63L/H)	/	/	1	/	/	1	1	/	/	2	2	400*1	/	/	/	/
SCSJ-VI(94L/H)	/	/	1	/	/	1	1	/	/	2	2	600*1	/	/	/	/
SCSJ-VII(125L/H)	/	/	1	/	/	1	1	/	/	1	1	400*2	/	/	/	/
SCSJ-VII(45L/H)	/	/	1	/	/	1	1	/	/	1	1	300*1	/	/	/	/
SCSJ-VII(63L/H)	/	/	1	/	/	1	1	/	/	1	1	400*1	/	/	/	/
SCSJ-VII(94L/H)	/	/	1	/	/	1	1	/	/	1	1	600*1	/	/	/	/
SCSJ-VIII(125L/H)	/	/	1	/	/	1	1	/	/	1	1	400*2	/	/	/	/
SCSJ-VIII(45L/H)	/	/	1	/	/	1	1	/	/	1	1	300*1	/	/	/	/
SCSJ-VIII(63L/H)	/	/	1	/	/	1	1	/	/	1	1	400*1	/	/	/	/
SCSJ-VIII(94L/H)	/	/	1	/	/	1	1	/	/	1	1	600*1	/	/	/	/
SCSJ-IX(45L/H)	/	/	1	/	/	1	1	/	/	1	1	300*1	/	/	/	/
SCSJ-IX(63L/H)	/	/	1	/	/	1	1	/	/	1	1	400*1	/	/	/	/
SCSJ-IX(94L/H)	/	/	1	/	/	1	1	/	/	1	1	600*1	/	/	/	/
SCSJ-IX(125L/H)	/	/	1	/	/	1	1	/	/	1	1	400*2	/	/	/	/

Model Type	PP filter	Active carbon filter	Granular active carbon filter	Precision filter	20" compressed activated carbon filter	Resin Regeneration Exchange Agent	Deionization purification column	RO membrane	Sodium Ion Resin	EDI	Quartz Sand	Softening Resin	Folding Filter Element
Replacement term/set(months)	4-6	4-6	4-6	4-6	4-6	According to the test agent test cycle	/	12	12-18	/	24-36	24-36	3-6
SCSJ-I-10L	1	2	/	/	/	/	3000L*2	50*1	/	/	/	/	/
SCSJ-I-15L	1	2	/	/	/	/	3000L*2	50*1	/	/	/	/	/
SCSJ-II-20L	1	1	/	/	/	/	5000L*1	300*1	/	/	/	/	/
SCSJ-II-30L	1	1	/	/	/	/	5000L*1	300*1	/	/	/	/	/
SCSJ-II-40L	1	1	/	/	/	/	5000L*1	300*1	/	/	/	/	/
SCSJ-II-60L	2	/	1	/	1	/	5000L*1	300*2	/	/	/	/	/
SCSJ-II-60LZ	2	/	1	/	1	/	5000L*1	300*2	/	/	/	/	/
SCSJ-II-80L	2	/	1	/	1	/	5000L*1	300*2	/	/	/	/	/
SCSJ-II-100L	2	1	/	/	1	/	5000L*1	400*2	/	/	/	/	/
SCSJ-II-120L	1	/	1	/	1	/	10000L*2	400*2	/	/	/	/	/
SCSJ-II-150L	1	/	1	/	1	/	10000L*2	800*1	/	/	/	/	/
SCSJ-II-200L	1	/	1	/	1	/	10000L*2	800*1	/	/	/	/	/
SCSJ-II-300L	6	1(12-18)	/	1	/	/	/	4040*3(18-24)	2	1	/	/	/
SCSJ-II-500L	6	1(12-18)	/	1	/	/	/	4040*6(18-24)	2	1	/	/	/
SCSJ-II-1000L	6	2(12-18)	/	1	/	/	/	4040*3(18-24)	5	1	/	/	/
SCSJ-II-300LF	2	1(12)	/	/	/	/	/	4040*2(24-36)	/	/	1	1	2
SCSJ-II-600LF	2	1(12)	/	/	/	/	/	4040*2(24-36)	/	/	1	1	2
SCSJ-II-1000LF	2	1(12-36)	/	/	/	1	/	4040*4(24-36)	/	/	1	1	2

Water Purifier Consumables

Model Type	U type Quick-Insert PP Cotton Filter	U Type Quick-Insert Active Carbon Filter	U Type Quick-Insert Ultra Purification Column	RO membrane	0.2 μm PES terminal filter	Imported PES 5000 Dalton UF Heat Source Column	Dual wavelength (185 & 254 nm) UV lamp (import)	PP Filter	Refined Activated Carbon Rod Filter	12L deionization purification tank	11" ultra purification column	Activated Carbon Filter	Capsule filter
Replacement term/set(months)	3-6	3-6	/	12-24	24-36	/	9000h	4-6	4-6	20-25 tons	20-25 tons	4-6	12
SCSJ-10D	1	2	1000*3	75*1	/	/	/	/	/	/	/	/	/
SCSJ-20D	1	2	1000*3	150*1	/	/	/	/	/	/	/	/	/
SCSJ-30D	1	2	1000*3	200*1	/	/	/	/	/	/	/	/	/
SCSJ-10L	1	2	1000*4	75*1	1	/	/	/	/	/	/	/	/
SCSJ-20L	1	2	1000*4	150*1	1	/	/	/	/	/	/	/	/
SCSJ-30L	1	2	1000*4	200*1	1	/	/	/	/	/	/	/	/
SCSJ-10F	1	2	1000*4	75*1	1	1	/	/	/	/	/	/	/
SCSJ-20F	1	2	1000*4	150*1	1	1	/	/	/	/	/	/	/
SCSJ-30F	1	2	1000*4	200*1	1	1	/	/	/	/	/	/	/
SCSJ-10V	1	2	1000*4	75*1	1	/	1	/	/	/	/	/	/
SCSJ-20V	1	2	1000*4	150*1	1	/	1	/	/	/	/	/	/
SCSJ-30V	1	2	1000*4	200*1	1	/	1	/	/	/	/	/	/
SCSJ-10VF	1	2	1000*4	75*1	1	1	1	/	/	/	/	/	/
SCSJ-20VF	1	2	1000*4	150*1	1	1	1	/	/	/	/	/	/
SCSJ-30VF	1	2	1000*4	200*1	1	1	1	/	/	/	/	/	/
SCSJ-40D	/	/	400*1	/	/	/	/	1	2	1	/	/	/
SCSJ-60D	/	/	400*1	/	/	/	/	1	2	1	/	/	/
SCSJ-120D	/	/	400*2	/	/	/	/	1	2	1	/	/	/
SCSJ-40U	/	/	400*1	/	1	/	/	1	2	1	2	/	/
SCSJ-60U	/	/	400*1	/	1	/	/	1	2	1	2	/	/
SCSJ-120U	/	/	400*2	/	1	/	/	1	2	1	2	/	/
BK-DI-20L	/	/	/	300*1	/	/	1	1	/	1	/	1	1
BK-DI-30L	/	/	/	300*1	/	/	1	1	/	1	/	1	1
BK-DI-40L	/	/	/	300*1	/	/	1	1	/	1	/	1	1

Model Type	PP filter	Granular activated carbon filter	High quality coconut shell activated carbon filter	Large T33 filter	RO membrane	Ultra purification column	Capsule filter	EDI resin	Ion exchange resin	Coarse sand	Silver sand	Coconut shell activated carbon filter	Industrial salt	Sodium hydroxide	Hay tank	Upgrading the pump bottom valve	Submarine UV lamp	Ozonator	PH electrode
Replacement term/set(months)	4-6	4-6	/	4-6	12	/	/	/	/	/	/	/	/	/	6-8	12	24-36	24	12-24
BK-UP-20L	1	1	1	1	2	4	1	/	/	/	/	/	/	/	/	/	/	/	/
BK-UP-30L	1	1	1	1	2	4	1	/	/	/	/	/	/	/	/	/	/	/	/
BK-UP-40L	1	1	1	1	400*1 75*1	4	1	/	/	/	/	/	/	/	/	/	/	/	/
BK-UP-60L	1	1	1	1	400*1 75*1	4	1	/	/	/	/	/	/	/	/	/	/	/	/
BKSROEZ-300	/	/	/	/	5	/	/	1	2	70kg	20kg	25kg	10kg	/	/	/	/	/	/
BKSROEZ-500	/	/	/	/	5	/	/	1	2	70kg	20kg	25kg	10kg	/	/	/	/	/	/
BKSROEZ-750	/	/	/	/	5	/	/	1	2	70kg	20kg	25kg	10kg	/	/	/	/	/	/
BKSROEZ-1000	/	/	/	/	5	/	/	1	2	70kg	20kg	25kg	10kg	/	/	/	/	/	/
BK-SFS200	/	/	/	/	/	/	/	/	/	/	/	/	/	/	1	1	1	1	1
BK-SFS500	/	/	/	/	/	/	/	/	/	/	/	/	/	/	1	1	1	1	1
BK-SFS30H	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	1	/

Water Distiller

Electric-heating Water Distiller



- Features:**
- * Stainless steel material, adopt stamping and welding technology.
 - * Corrosion and ageing resistance, easy to operate, safe and durable.

Technical Parameters:

Model	WD-5	WD-10	WD-20
Water Output	≤5L/H	≤10L/H	≤20L/H
Consumption	5KW	7.5KW	15KW
Power Supply	AC220V±10%, 50/60Hz (Standard); AC110V±10%, 50/60Hz(Optional)	AC380V±10%, 50/60Hz(Standard); AC220±10%, 50/60Hz(Optional)	
External Size(φ*H)	280*700mm	310*820mm	375*917mm
Package Size(W*D*H)	330*290*700mm	360*320*720mm	430*380*770mm
Gross Weight	8kg	8kg	11kg

Auto-control Electric-heating Water Distiller



- Features:**
- * Stainless steel material, adopt stamping and welding technology.
 - * Water shortage and power-off alarm.
 - * Power, heating indicator and show water shortage.

Technical Parameters:

Model	WD-A5	WD-A10	WD-A20
Water Output	≤5L/H	≤10L/H	≤20L/H
Consumption	5KW	7.5KW	15KW
Power Supply	AC220V±10%, 50/60Hz (Standard); AC110V±10%, 50/60Hz(Optional)	AC380V±10%, 50/60Hz(Standard); AC220±10%, 50/60Hz(Optional)	
External Size(φ*H)	280*740mm	310*855mm	375*960mm
Package Size(W*D*H)	330*290*710mm	360*320*720mm	430*380*770mm
Gross Weight	8kg	8.5kg	13kg

Laboratory Wastewater Treatment System



BK-SFS200

BK-SFS500

Application:

Medical center, Physical and chemical inspection, PCR laboratory, Operating room, Beauty center



Features:

- * Perfect processing technology
Various kinds of pollutants in sewage are treated by chemical reaction, aeration oxidation, ozone disinfection, multi-medium filtration, ultraviolet lamp disinfection and other technologies.
- * Intelligent monitoring
The intelligent man-machine control system is adopted to monitor and control the change of sewage quality and the treatment process in real time, so as to realize all-weather automatic operation without special person on duty.
- * High-efficient sterilization
Compared with the traditional equipment, this system has the advantages of simple and convenient operation and strong sterilization ability.
- * Accurate dosing
Imported metering pump is used to accurately control the dosage, and equipped with liquid level control, drug shortage alarm and other devices.
- * Easy operating
Easy to operate, stable operation, long service life, low cost of operation and maintenance.

Technical Parameters:

Model	BK-SFS200	BK-SFS500
Treated Water Volume	200L/Day (8 hours)	500L/Day (8 hours)
PH Measurement Range	0-14	
PH Adjustment Value	6-9	
Resolution	0.01pH	
Accuracy	±0.02pH	
Processing System	Neutralization precipitation + compound disinfection (ozone oxidation, Oxidizing agent oxidation) + UV sterilization+ multi-stage filtration	Neutralization precipitation + compound disinfection (ozone oxidation, Oxidizing agent oxidation) + UV sterilization+ multi-stage filtration+ aeration + photocatalysis(optional)+ microelectrolysis
Flush Mode	With positive and negative flushing methods	
Water Input Way	Imbibition inlet	Imbibition inlet and artesian inlet
Antifreeze Device	With antifreeze heating function, the antifreeze function starts automatically when the degree is lower than 5°C.	
Lack of Fluid Alarm	Multi-channel liquid level detection, with drug liquid shortage alarm function, automatic waste water treatment.	
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz	
Packing Size(W*D*H)	Machine:1055*559*948mm	Machine:1500*710*1415mm
	Accessories: 315*555*165mm	Accessories: 515*515*1315mm
Gross Weight	102.5kg	220kg

Medical Wastewater Treatment System



Features:

- * Safety and sanitation
No need to add chemical agents, more safe and hygienic operation
- * Intelligent monitoring
The intelligent man-machine control system is adopted to monitor and control the change of sewage quality and the treatment process in real time, so as to realize all-weather automatic operation without special person on duty.
- * High-efficient sterilization
Compared with the traditional equipment, this system has the advantages of simple and convenient operation and strong sterilization ability.
- * Easy operating
Easy to operate, stable operation, long service life, low cost of operation and maintenance.

Technical Parameters:

Model	BK-SFS30H
Treated water volume	30L/H
Maximum Lift	25m
Maximum Suction	8m
Max Flow	1.8m³/h
Control Method	Manual/Auto
Processing system	Primary treatment, ozone oxidation, UV sterilization(optional), sediment
Water Input Way	Imbibition inlet
Sterilization Principle	Ozone sterilization, ozone capacity 500mg/h
Control Method	Three control modes, cycle, single level, double level mode (optional)
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz
Packing size(W*D*H)	595*555*715mm
Gross weight	33kg

Application Field:



Medical center



Physical and
chemical inspection



PCR laboratory



Operating room



Beauty center

Neonatal Care Products

Infant Incubator BK-3201

Introduction:

Infant incubator is one of the important equipment used in medical institutions. It is mainly used for constant temperature cultivation, temperature resuscitation, oxygen delivery, rescue, hospitalization and observation of sick infants and premature infants. It is used in hospitals, confinement centers, neonatology, etc.

Features:

- * LCD display
- * Double control modes of bed temperature and skin temperature
- * Double-layer thermostatic cover, automatic air curtain device
- * Humidity control function
- * Air & Oxygen blender
- * Oxygen supply system
- * Baby cot is infinitely adjustable
- * 24 kinds of sound and light alarm, comprehensive protection of baby safety



Technical Parameters:

Item		Specifications
General Parameters	Power supply	AC220V, 50/60Hz(Standard) 1320VA; AC110V, 60Hz(Optional)
	Size (L*W*H)	950*645*(1250-1450)mm
	Maximum heater output power (220VAC)	Air chamber heater: 330W; Water tank heater: 155W
	Auxiliary network power output	AC220V/50Hz, Both maximum permissible currents are 220V 1.5A
	Heater indication	0~100%,10% increasing amount
	Temperature control mode	Bed temperature mode; The skin temperature mode
	Bed temperature control temperature range	25.0~37.0℃; 37.1~39.0℃(Span Mode)
	Skin temperature control range	34.0~37.0℃; 37.1~38.0℃(Span Mode)
	Skin temperature sensor temperature display range	5.0~65.0℃
	Heating time	≤ 50min
	Temperature variability	≤ 0.5℃
	Temperature uniformity (mattress in horizontal position)	≤ 0.8℃
	Temperature uniformity (mattress in tilted position)	≤1.0℃
	Difference between average incubator temperature and control temperature	≤1.5℃
	Skin temperature sensor accuracy	±0.3℃

Humidity Control	The running time of the tank after it is filled with distilled water	Humidity below 70%RH, at least 24h
	Water tank capacity	1500ml
	Humidity display range	0%RH~99%RH
	Humidity control range	CAH%RH~90%RH(1% per adjustment)
	Humidity control accuracy	±10%
Oxygen Concentration Control	Oxygen concentration display range	0%~99%
	Oxygen concentration display resolution	1%
	Oxygen concentration control accuracy	±5% oxygen volume concentration
	Oxygen concentration setting range	21%~60%(1% per adjustment)
	Oxygen sensor service life	The maximum use time is 10000h at 100% oxygen concentration
Transport Storage	Temperature	-20℃~+55℃
	Atmospheric pressure range	500hPa~1060hPa
	Relative humidity	≤93%RH
	Packing size/ Gross Weight	1150*800*1600mm 190kg
The Work Environment	Relative humidity	30%RH~75%RH
	The environment temperature	+20℃~+30℃
	Pressure range	700hPa~1060hPa
	Service altitude	≤2000m
	Over voltage category	II
	Pollution levels	2
	Ambient air velocity	≤ 0.3m/s
Other Indicators	Environmental noise in incubator baby compartment	No more than 55dB(A) at stable temperature
	Carbon dioxide concentration in the infant compartment	A mixture of 4% carbon dioxide and air was fed into an 8mm diameter tube in the vertical direction from the mat to the top of the box at 750mL/min to a point 10cm above the mattress center and 10cm above the center. The concentration was less than 0.5% after stabilization
	The velocity of air flow over a baby's mattress	≤0.35m/s
General Alarm	Power failure alarm, fan alarm, sensor alarm, deviation alarm, over temperature alarm, water tank placement error alarm, water shortage alarm	
The System Alarm	Mcu1 and Mcu2 communication error alarm, Mcu2 and Mcu3 communication error alarm, analog-to-digital conversion chip 2544 failure alarm, analog-to-digital conversion chip 2548 failure alarm, over temperature alarm, temperature heating system failure, humidity heating system failure	

Configuration:

Model	Type I+	Type I	Type II	Type III	Type IV
Temp. Control	Bed/Skin temperature	Bed/Skin temperature	Bed/Skin temperature	Bed/Skin temperature	Bed/Skin temperature
Display	LCD	LCD	LCD	LCD	LCD
Bed Temp. Control Range	25℃-39℃	25℃-39℃	25℃-39℃	25℃-39℃	25℃-39℃
Skin Temp. Control Range	34℃-38℃	34℃-38℃	34℃-38℃	34℃-38℃	/
Humidity Control Range	CAH%~99%RH	CAH%~99%RH	CAH%~99%RH	/	/
Oxygen Control Range	21%-99%	21%-99%	/	/	/
Cabinet	Yes	Yes	Yes	Yes	Yes
Height Adjustable	Yes	/	/	/	/

Infant Radiation Warmer

Introduction:

Infant Radiant Warmer is a specialized medical device designed for thermal care of low birth weight neonates, preterm infants, critically ill infants, and vulnerable newborns. It features an infrared radiant heating system to provide continuous warmth while incorporating a skin temperature sensor for real-time monitoring of the infant's body surface temperature during clinical care.



Features:

- * Offers three temperature control modes: preheating, manual, and skin temperature.
- * Real-time LED split-screen display of set temperature, skin temperature, countdown, and heating power percentage.
- * Features an independent over-temperature protection system.
- * Adjustable horizontal angle of the radiation box and tilt angle of the infant bed.
- * Removable transparent acrylic panels around the infant bed for easy cleaning.
- * Sound and light alarms with self-check function for power failure, deviation, over-temperature, sensor failure, manual operation, and system alarms.
- * Temperature calibration function.
- * Skin temperature sensor disconnection alert.
- * APGAR score countdown function.
- * Reserved RS-232 interface for data connectivity.
- * LED lighting with independent switch and adjustable direction and angle.
- * Bed tilt mechanism uses a lockable gas spring mechanism for easy one-handed operation and smooth adjustment.

Technical Parameters:

Model	BK-IRW-I
Display	High-contrast digital split-screen
Temp. Modes	Preheat, skin temperature, manual
Skin Temp. Control Range	25~37.5°C
Skin Temp. Display Range	5~65°C
Temp. Accuracy	±0.5°C
Skin Sensor Accuracy	±0.3°C
Cot Temp. Uniformity	≤2°C
Heating Time	≤45minutes
Bed Height	850mm
Radiation Head Angle	±45° bidirectional rotation
Bed Tilt Angle	±12° stepless adjustment
Power Supply	AC220V, 50/60Hz
Power Rating	750VA
External Size(W*D*H)	700*1040*1820mm
Package Size(W*D*H)	750*1160*1220mm
Net Weight	55kg
Gross Weight	61kg

Infant Intelligent Physical Examination Instrument



Introduction:

Applicable to physical examination centers, hospitals, maternal and child health care, confinement centers and other related units for infant physical examination and growth assessment.

Features:

- * Ultrasonic automatic measurement of body length.
- * The weighing sensor automatically measures the body weight.
- * The foot guard is moved by the double-track outer slide way, the measuring board is spacious and beautiful in appearance.
- * It can calculate and print the body mass index and evaluate the growth status of infants and young children.

Technical Parameters:

Model	BK-PE201
Length Range	30~115cm
Length Precision	0.5cm
Weight Range	1~60kg
Weight Precision	50g
Display	LCD
Printing Function	Thermal printer
BMI Function	Provide general physical parameters for the subjects to be tested
Voice Function	Voice prompt, volume adjustable, measurement value broadcast
Other Function	Can set birth date, sex
Power Supply	AC100~240V; 50/60Hz
External Size(W*D*H)	1277*550*400mm
Packing Size(W*D*H)	1340*520*270mm
Gross Weight	23kg

Jaundice Meter

Jaundice Meter adopts advanced fiber technology, optical technology, electronics and information processing technology, the light and electricity organically combined for dynamically monitoring neonatal serum bilirubin percutaneous value. The device can measure percutaneous bilirubin value related to serum bilirubin concentration through neonatal skin by rapid noninvasive determination, eliminating the pain caused by repeated blood samples to neonates, but also reducing difficulties of medical staff to collect blood samples. BY-D-I and BY-D-II have self-calibration functions.

Product configuration:

Jaundice meter, calibration plate and charger.



Technical Parameters:

Model	BY-D-I	BY-D-II
Measuring Method	Light reflection	
Light Source	Xenon flash	
Display	1.6-inch LCD display	2.2-inch LCD display
Measuring Range	0.0~29.9mg/dL(0.0~425μmol/L)	
Indication Error	00~15±1(mg/dL) ; 16~25±1.5(mg/dL)	
Measuring Accuracy	RSD<2%	
Battery	4 Triple A rechargeable nickel-metal hydride batteries	Built-in lithium battery
Measuring Times	800 times after each full charge	
Measuring Units	mg/dL; μmol/L	mg/dL; μmol/L(Simultaneous display)
Measuring Averages	2~5 sets	1~5 sets(Display both test values and averages)
Calibration Plate	White screen 00.0 or 00.1mg/dL Yellow screen 20.0 ± 1 mg/dL	
Working Temp	10~30℃	
Working Relative Humidity	≤80%	
Working Atmospheric Pressure	75~106 Kpa	
Storage Function	/	Stores up to 100 records
Power Supply	Input: AC100~240V, 50/60Hz Output: DC6.0V	Input: AC100~240V, 50/60Hz Output: DC5.0V
External Size (W*D*H)	175*68*26mm	168*62*26mm
Package Size (W*D*H)	275*135*235mm(carton box)	
Net Weight	0.157kg(including batteries) 0.11kg(without battery)	0.155kg
Gross Weight	1.33kg	

Neonatal Jaundice Therapy Apparatus

Introduction:

Mode selection: There are two modes of white light and blue light, with blue light and white light switch function.With single timing, cumulative timing, countdown function.Light source: LED blue light source, produce natural soft blue light.Provide high strength cold light source to light treatment, prevent heat conduction effects on children.

Features:

- BHZ-001:
- * The adjustable range of the irradiation angle for the mobile jaundice treatment lamp box should be from 0°to 90°, with free adjustment up and down.
 - * Square lift guide, guide to prevent left and right rotation at the same time.
- BHZ-002:
- * It can be fixed to the top of the incubator by the bottom suction cup.



Technical Parameters:

Model	BHZ-001	BHZ-002
Light Source	LED	
Dominant Wavelength of Blue Light (nm)	425~475	
Lifetime of the LED	5000h	
Product Service Life	6 years	
Radiation Therapy Distance(mm)	Distance light box 450	Distance light box 450
Phototherapy Effective Surface Area(mm)	300*200	
The Total Irradiance for Maximum Bilirubin on the Effective Surface Area	5.2mW/cm²±0.5mW/cm²	2.4mW/cm²+0.3mW/cm²
The Total Irradiance on the Effective Surface Area	≥2.5mW/cm²	≥1.0mW/cm²
Average Value of the Total Irradiance for Bilirubin	4.0mW/cm²±0.5mW/cm²	1.5mW/cm²±0.5mW/cm²
Uniformity of the Total Irradiance for Bilirubin	>0.4	
Noise	≤45dB(A)	
Light Box Irradiation Angle Adjustment Range	0~90 ° adjusted up and down	/
Light Box Height Adjustment Range(mm)	1350~1650	/
Display Timer Range	0~9999 hours 59 minutes	
Ambient Air Movement Rate(m/s)	<0.3	
Working Temp.	5~35℃	
Working Relative Humidity	30%~80%	
Working Atmospheric Pressure	700~1060hPa	
Overvoltage Category	II	
Pollution Grade	2	
Waterproofing Grade	IPXO	
Application Environment Elevation(m)	≤3000	
Power Supply	AC100~240V; 50/60Hz	
External Size(W*D*H)	705*620*1350~1650mm	470*320*65mm
Packing Size(W*D*H)	750*710*1250mm	615*415*180mm
Net Weight	15kg	4kg
Gross Weight	33kg	5.1kg

Doppler Fetal Monitor



Features:



Precise measure



Clear fetal sound



High sensitivity



Rechargeable batteries



Intelligent noise reduction



Zero micro-radiation



Light Indication



Compact and portable

Applications:

Doppler Fetal Monitor is a small and portable fetal heart rate monitoring instrument. It is suitable for fetal heart rate detection and fetal heart sound monitoring for middle and late pregnancy women. Using intelligent noise reduction technology, the fetal sound is clear, the measurement is accurate, safe and reliable, and it is a common fetal monitoring instrument for obstetrics and families.



Technical Parameters:

Model	BK-TH-8A
Ultrasonic Output Intensity	10mW/cm ²
Ultrasonic Output Power	8mW
Nominal Acoustic Operating Frequency	3.0MHz
Measuring Precision	1bpm
Measuring Accuracy	±2bpm
ATM Range	70~106kPa
Ambient Temp. Range	5~40℃
RH Range	30%~80%
Battery Information	DC9.6V battery
Power Supply	AC100~240V, 50/60Hz
External Size(W*D*H)	75*180*30mm
Net Weight	260±20g(include battery)
Packing Size(W*D*H)	310*225*90mm
Gross Weight	1.1kg

Medical Diagnostic and Therapeutic Equipment

Pulmonary Function Tester



Introduction:

Pulmonary function tester is a medical device used to measure the volume of air inhaled and exhaled by the lungs. It can perform lung function tests and track the health of the lungs.vital capacity, maximal minute ventilation and resting minute ventilation,physical examination tests, diastolic tests.

Features:

- Meets American Thoracic Society standards
- Well-known brand high-precision flow sensor
- Can store about 1000 results
- 8 inch full touch screen display
- Built-in high-performance thermal printer;

Technical Parameters:

Model	BK-LFT-I
Display	8 inch touch screen
Resolution	1024*768
Color Depth	65K
Printer	Built-in
Printing Paper	Thermal paper 80mm*30mm
Printing Speed	50mm/s
Ambient Temperature	5~40℃
Relative Humidity	≤80%RH
Ambient Pressure	70~106 kPa
Volume Range	0~10L
Volume Accuracy	±3% or ±0.05L(whichever is greater)
Flow Range	0~14L/s
Flow Accuracy	±5% or ±0.17L/s(whichever is greater)
Power Supply	AC100~240V,50/60Hz
External Size(L*W*H)	240*210*165mm
Package Size(L*W*H)	Main instrument:570*240*420mm; Accessories:300*185*220mm
Gross Weight	Main instrument:7.5kg; Accessories:0.8kg

Intermediate Frequency Therapy Instrument




BK-ZP02A



BK-ZP04A

Features:

- * Sp-box technology, no interference, no noise wave, pretty stable
- * Intuitive and portable, 10.1-inch touch LCD screen
- * 99 treatment prescriptions, 9 kinds of waveform collocation, good treatment effect
- * Diathermy function, the temperature of electrode can be adjusted, and multiple grades available
- * The products comply with the latest national industry standard, 2023.5.1
- * Intelligent interaction, treatment waveform and intensity changes can be displayed at the same time

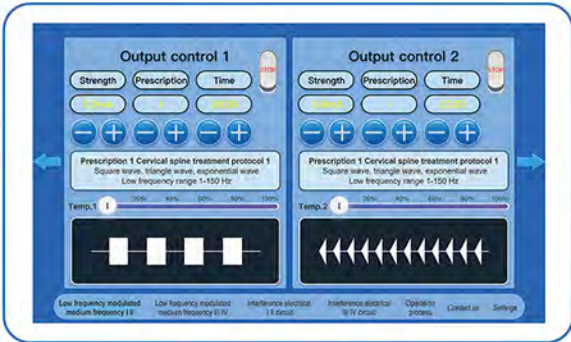

10.1-inch Touch LCD Screen

Technical Parameters:

Model	BK-ZP02A	BK-ZP04A
Output	Double channels, two patients treated at the same time	4 channels, four patients treated at the same time
Prescriptions	99	
Modulation	0, 100%	
Carrier Frequency	2kHz, 3kHz, 4kHz, 5kHz, 10kHz	
Modulated Frequency	0~150Hz	
Current Intensity	0~100mA	
Power Supply	AC220V/110V, 50hz/60hz	
Power	90VA	
External Size(W*D*H)	340*260*125mm	288*365*995mm
Net Weight	4.4kg	22.2kg
Packing Size(W*D*H)	395*315*275mm	410*470*1130mm
Gross Weight	6.2kg	30.5kg



Features:

- * Diathermy function, warm heat can promote blood circulation, improve tissue metabolism, stimulate tissue regeneration, and can relieve pain and strengthen tissue nutrition.
- * Deep penetration therapy, the intermediate frequency is up to 5kHz, which can penetrate deeper into the tissue.
- * Four rows of digital display can display the treatment time and dose of 2 channels at the same time.
- * The output current is less than or equal to 100mA, and 198 gears are adjustable.
- * Synchronous and asynchronous function, 2 patients can be treated synchronously or asynchronously.
- * Contains 29 different physiotherapy prescriptions.

Technical Parameters:

Model	BK-MF-IIA
Output	Double channels, two patients treated at the same time
Prescriptions	29
Modulation Waveform	Square wave, trapezoidal wave, triangle wave, sawtooth wave, exponential wave, sine wave, pulse wave and other amplitude wave
Carrier Frequency	2kHz, 3kHz, 4kHz, 5kHz
Modulated Frequency	0~150Hz
Current Intensity	0~100mA
Continuous Working Time	≥4h
Modulation	0, 100%
Power Supply	AC220/110V,50/60Hz
Power	90VA
External Size(W*D*H)	344*266*118mm
Net Weight	3kg
Packing Size(W*D*H)	470*310*260mm
Gross Weight	4.5kg

Semi-Automated External Defibrillator



Introduction:

External defibrillators are essential emergency devices for defibrillation and cardiopulmonary resuscitation. Their principle is to use a strong pulse of electrical current through the heart to eliminate arrhythmia. The semi-automatic external defibrillator can be operated by automatic voice prompts, and can automatically identify the shockable rhythm and select the appropriate shock parameters. It can be deployed in emergency departments of hospitals at all levels, transportation hubs, schools, shopping malls and other densely populated public units.

Features:

- * Fast and effective, reliable performance.
- * The whole process of voice prompts, easy to operate.
- * Toggle adult/child mode with one key.
- * Regular self-test function.

Technical Parameters:

Model	BIO-AED-I
Control Type	Semi-automatic
Compensation Range	25Ω~180Ω
Mode	Adults (≥ 25 kg or ≥ 8 years); Children (< 25 kg or < 8years)
Discharge Wave Form	Biphasic exponential truncated wave, waveform parameters can be automatically compensated
Disposable Defibrillation Electrodes	Adult type, children type (optional)
Battery	Manganese dioxide lithium battery DC12.0V, 4200mAh
Number of Electric Shocks	≥160 times (20°C ± 2°C)
Duration of Continuous Monitoring	≥450 minutes (20°C ± 2°C)
Number of Electric Shocks (At Low Battery)	≥15 times (20°C ± 2°C) after the first low battery prompt
Service Life	Main instrument: 8 years; Battery: 5 years, electrode: ≥30 months
Registration Certificate No.	National Instrument Registration No. 20243080989
Operating Environment	0°C~50°C, 59%~95% (without condensation), 57kPa~106kPa
External Size(W*D*H)	215*280*85mm
Net Weight	1.9kg
Package Size(W*D*H)	335*345*150mm
Gross Weight	3kg

AED Trainer



Features:

- * Identical to the real machine
- * Simulation practice
- * Eight modes
- * Full-process voice guidance
- * Controlled by mobile phone

Introduction:

AED Trainer is designed to effectively train emergency responder in the use of an Automatic External Defibrillator (AED). This training unit provides a variety of pre-programmed scenarios to help responders become familiar with an AED and allow them to demonstrate the basic skills necessary to use an AED in an emergency.

This machine has the same appearance, the same usage process and automatic voice operation prompts as the semi-automatic external defibrillator. It can truly simulate the emergency rescue process and is widely applicable to units such as hospitals, troops, schools, and the Red Cross Society.

Technical Parameters:

Model	BIO-DTAED-I	BIO-QTAED-I
Control Type	Semi-automatic	
Mode	Adults and Children	
Defibrillation Training Electrodes	Reusable and suitable for both adults and children	
CPR Mode	Compression, 30:2, 15:2	
Battery	Rechargeable lithium battery DC12.0V, 4200mAh	
Power Charger	AC100~240V,50/60Hz	
Control Mode	Wireless control by APP	
Group Control Function	No	Yes (Free networking group control available)
Service Life	Main instrument: 8 years	
Operating Environment	0°C~50°C, 59%~95% (without condensation), 57kPa~106kPa	
External Size(W*D*H)	215*280*85mm	
Net Weight	1.9 kg	
Package Size(W*D*H)	335*345*150mm	
Gross Weight	3 kg	

Compression Nebulizer

Application:

Frequent respiratory diseases and influenza caused by environmental pollution and climate change, and oral drugs slow to take effect. To treat respiratory diseases, we recommend aerosol therapy. Atomized particles can direct to the diseased part, quick effect, less medication, less side effects, realizing combined drug treatment. Preparing Bioabase compression atomizers at home, easy to solve a variety of minor problems.



Features:



Low-noise operation and quiet atomization



Fine mist and easy to absorb



Two modes are selected on demand



One-button start and convenient operation



The amount is adjustable and free atomization

Technical Parameters:

Model	BK-AN-IA
Air Flow Rate	Compressor pump free air flow ≥10L/min
Drug Cup Capacity	2ml~8ml
Spray Rate	Maximum Atomization Rate ≥0.2ml/min
Residual Liquid Medicine Amount	≤1.0ml
Immersion Protection Level	IPX0
Median Diameter of Mist Particle	2.7μm±25%, the diameter of mist particles less than 5μm accounted for > 65%
Electrical Safety Requirements	Class II Type B applications
Continuous Working Time	≥4h
Noise	≤60dB(A)
Atmospheric Pressure Range	86~106KPa
Ambient Temperature Range	+5~+40°
Relative Humidity Range	30%~75%
Input Power	200VA
Power Supply	AC220V, 50/60Hz
External Size(W*D*H)	219*210*128mm
Package Size(W*D*H)	345*290*210mm
Net Weight	2.1kg
Gross Weight	2.9kg

Multimedia Nebulization Therapy Unit



Introduction:

Multimedia Nebulization Therapy Unit built-in nebulization device (i.e. Compression Nebulizer), using independent nebulization position design, and adding video players to play high-definition animation, so that children with happy treatment, increase children's interest in treatment and compliance, enhance the effect of treatment.

Features:

- * Independent nebulization positions to avoid crowding and cross-infection.
- * 10-inch video animation player, increases interest in treatment, guides children nebulization.
- * One-button start and convenient operation.
- * Built-in medical nebulizer for reliable use.
- * The cartoon layout attracts children and reduces children's sense of rejection of the hospital.

Technical Parameters:

Model	BK-NT-II
Dispiay	10-inch TFT HD color screen
Sheet Material	16mm particle board
Environmental Protection Level	Class E1
Nebulization Positions	2
Data Storage	U disk and TF card storage, standard with 8G large capacity U disk
Play Function	Support for full-format video playback
Built-in Compression Nebulizer Model	BK-AN-IA
Air Flow Rate	Compressor pump free air flow ≥10L/min
Spray Rate	Maximum Atomization Rate ≥0.2ml/min
Residual Liquid Medicine Amount	≤1.0ml
Median Diameter of Mist Particle	2.7μm±25% the diameter of Mist particles less than 5μm accounted for > 65%
Continuous Working Time	≥4h
Noise	≤60dB(A)
Atmospheric Pressure Range	86kPa~106KPa
Ambient Temperature Range	+5°C~+40°
Relative Humidity Range	30%~75%
Input Power	400VA
Power Supply	AC220V, 50/60Hz
External Size(W*D*H)	1249*600*1025mm
Package Size(W*D*H)	685*730*605mm; 1110*705*445mm
Net Weight	60kg
Gross Weight	40kg; 53kg

Healthcare Station



Introduction:
 Healthcare station is a health intelligent platform integrating detection, service and physical examination.
 Through comprehensive health detection and efficient detection methods, it provides users with one-stop health management solutions. The equipment is mainly used in medical, physical examination, teaching, public health industry and elderly communities to solve the problems of many kinds of physical examination, slow result data, time-consuming and labor-intensive for the majority of people.

- Features:**
- * Integrated design, simple installation and maintenance, easy to move.
 - * Capacitive touch, animation, voice guidance, simple and self-service operation.
 - * Can choose the order of the test items.
 - * It adopts a 10.1-inch high-definition touchscreen for operation and supports WIFI connection.

Technical Parameters:

Model		BK-HWM100	
Electronic Sphygmomanometer	Measurement Range	Pressure: 20~280mmHg(2.67~37.3 kPa) Pulse Rate: 40~199 bpm	
	Measurement Accuracy	Pressure: ≤±3 mmHg (±0.4 kPa) Pulse Rate: ≤±5%	
Electronic Thermometer	Measurement Range	32~42.9℃	
	Measurement Accuracy	±0.2℃	
ECG Monitor		Single-lead ECG detection with intelligent analysis	
Pulse Oximeter	Measurement Range	Blood Oxygen Saturation: 35% ~ 100% Pulse Rate: 25~250 bpm	
	Measurement Accuracy	Blood Oxygen Saturation: ±2%@70%~100%; accuracy is undefined @<70%. Pulse Rate: 1bpm	
Muti-parameter Meter	Blood Glucose	Measurement Range	Deviation
		1.1~5.4mmol/L(20~99mg/dL)	≤±0.83mmol/L(±15mg/dL)
		5.5~33.3mmol/L(100~600mg/dL)	≤±15%
		Test Time	≤5s
	Uric Acid	Memory Capacity	300sets
		Measurement Range	Deviation
		0.179~0.35mmol/L(3.0~5.9 mg/dL)	≤±0.08mmol/L(±1.3mg/dL)
		0.351~1.19mmol/L(5.9~20.0mg/dL)	≤±20%
		Test Time	≤20s
	Total Cholesterol	Memory Capacity	300sets
		Measurement Range	Deviation
		2.59~5.17mmol/L(100~200mg/dL)	≤±1mmol/L(±38.7mg/dL)
		5.18~10.35mmol/L(200~400mg/dL)	≤±20%
Mental Health Assessment and Detection	Test Time		
	≤60s		
Memory Capacity		300sets	
Power Supply		AC100~240V,50/60Hz	
External Size(W*D*H)		400*320*140mm	
Package Size(W*D*H)		450*390*270mm	
Net Weight		4.1kg	
Gross Weight		5.5kg	

Surgical Shadowless Lamp



Advantages:

Cold Light Source Technology
 Advanced LED cold light source with zero UV/IR emission. Temperature rise $\leq 1^{\circ}\text{C}$ in surgical areas, 80,000+ hours lifespan, energy-efficient and eco-friendly.

Intelligent Optical Adjustment
 Multi-level adjustable color temperature (3000K-6700K). High CRI (Color Rendering Index) enhances tissue contrast visualization. Uniform light column ensures deep-cavity illumination while reducing visual fatigue.

Precision Control System
 LCD touch interface with one-touch endoscopic mode. Preset memory for customized parameters. Multi-channel independent control ensures uninterrupted illumination during single-LED failure.

Sterile & Purification-Optimized Design
 Seamless aerodynamic housing with aluminum alloy heat dissipation. Silicone-sealed dustproof construction complies with laminar airflow standards. Easy-to-clean surfaces support aseptic protocols.

Articulated Suspension System
 Dual curved arms + multi-joint linkage. 340° horizontal rotation, 90° vertical range, and precision positioning. 50,000-cycle endurance tested for multi-angle adaptability in complex procedures.

Autoclavable Focus Handle
 Stepless focus adjustment with detachable high-temperature-resistant handle ($\leq 160^{\circ}\text{C}$ autoclave compatible), enabling rapid intraoperative sterilization.

Premium Components
 MEAN WELL power supplies(Taiwan-based). Swiss-made antibacterial and flame-retardant coating(EU ROHS-certified) ensures safety and durability.

Modular Configurations
 Supports ceiling-mounted, floor-standing, wall-mounted, single/dual-head setups. Optional upgrades: shadow management system, HD camera systems, 360° balanced arms.

Technical Parameters:

Model	BK-LED500	BK-LED700	BK-LED500/700
Number of LEDs	48	80	48&80
Center Illuminance(LUX at 1M)	40000~160000(Adjustable)		
Color Temperature(K)	$3000\text{K} \leq T_c \leq 6700\text{K}$ (Adjustable)		
Color Rendering Index(Ra)	$85 \leq R_a \leq 100$		
Spot Diameter(mm)	≥ 120		
Spot Distribution Diameter(mm)	≥ 60		
Light Column Depth(mm)	≥ 800		
Irradiance(W/m ²)	≤ 900		
Temp. Rise at Surgeon's Head($^{\circ}\text{C}$)	≤ 1		
Temp. Rise in Surgical Field($^{\circ}\text{C}$)	≤ 2		
Operating Radius(mm)	≥ 2200		
Working Radius(mm)	600~1800		
Average Lamp Life(h)	≥ 80000		
Lamp Power	1W		
Optimal Installation Height(mm)	2800~3000		
Power Supply	AC100~240V 50/60Hz		
Consumption	200VA		
Packing Size(W*D*H) mm	Single arm: 1090*370*435 Lamp: 860*840*290	Single arm: 1090*370*435 Lamp: 1040*970*320	Double arm: 1090*370*520 Lamp: 860*840*290 1040*970*320
Net Weight(kg)	Single arm: 28.2 Lamp: 8.6	Single arm: 28.2 Lamp: 12.98	Double arm: 44.3 Lamp: 8.6,12.98
Gross Weight(kg)	Single arm: 38.2 Lamp: 13.12	Single arm: 38.2 Lamp: 18.42	Double arm: 55.2 Lamp: 13.12,18.42

X-ray Film Viewing Lamp



- Features:**
- * It has automatic sensing function. When the film viewing lamp is inserted into the film, the film insertion area will light up automatically.
 - * The LED color temperature is above 10000K, which makes your eyes less likely to get tired after long-term viewing.
 - * The brightness of the light source can be randomly adjusted from 1% to 100%, and supports brightness memory.
 - * Imported Mitsubishi observation screen is used, which is durable, does not deform or discolor.
 - * Aluminum alloy frame, rapid heat dissipation, reducing LED light and color decay, strong and durable.
 - * The light source adopts ultra-bright LED cold light source, and the maximum brightness of the observation screen reaches more than 4500cd/m².

Technical Parameters:

Model	BH-GPD01	BH-GPD02	BH-GPD03	BH-GPD04
Type	1 Ray Light Panel	2 Ray Light Panels	3 Ray Light Panels	4 Ray Light Panels
Light Color Temp.	>10000K			
Luminance Uniformity	≥0.8			
Max Luminance	>4500cd/m²			
Installation Method	Standard: Hanging type, optional: bracket type			
Auto-induction	Insert automatically lights up, take off automatically, brightness memory			
Light Source	LED cold light			
Clamping device	Soft silicone			
External Size(mm)	475*498*25	835*498*25	1195*498*25	1555*498*25
Viewing Area(mm)	360*420	720*420	1080*420	1440*420
Power Supply	AC100~240V, 50/60Hz			
Packing Size(mm)	620*115*680	980*130*680	1350*130*680	1700*130*680
Gross Weight(kg)	4.7	9	10.3	12.2